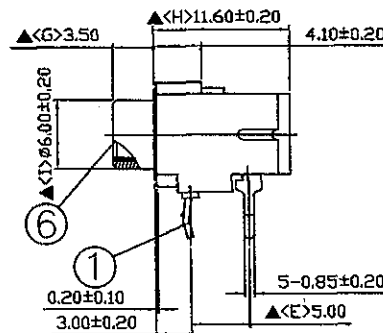
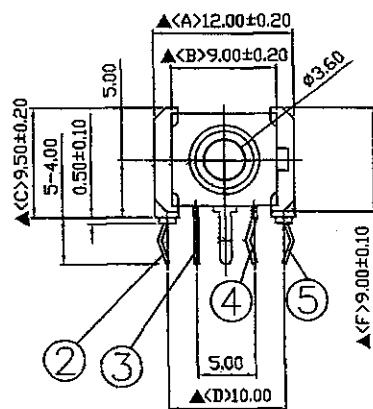
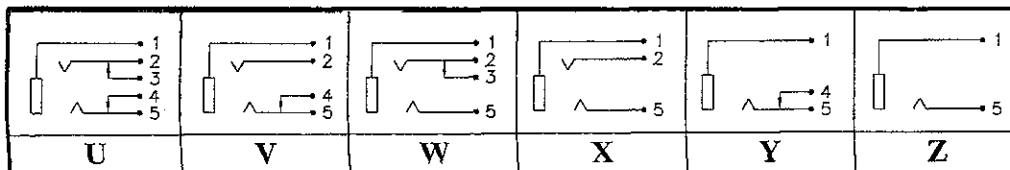


Pin Hole Layout
(Jack Bottom View)

9.	Bushing	PBT	1	Black Color
8.	Cover	PBT	1	Black Color
7.	Housing	PBT	1	Black Color
6.	Sleeve(Barrel)	Brass	1	Nickel Plated
5.	Tip Spring	0.3T TiCuR1-M-EH	1	Silver Plated
4.	Break Terminal	0.4T Bronze	1	Silver Plated
3.	Break Terminal	0.4T Brass	1	Silver Plated
2.	Ring Spring	0.3T Phosphor Bronze	1	Silver Plated
1.	Earth Terminal	0.5T Steel	1	Tin Plated

NO.	Description	Material	Q'TY	Finish
DATE: 10.10.2011, DWN, CHKD				
PART NAME : 3.5Ø PHONE JACK				
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED				
UNIT:mm				

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

RoHS
Compliant

SHOGYO INTERNATIONAL CORP.

SCJ359M5N(*)S0B00G