
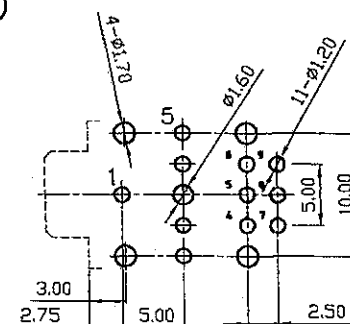

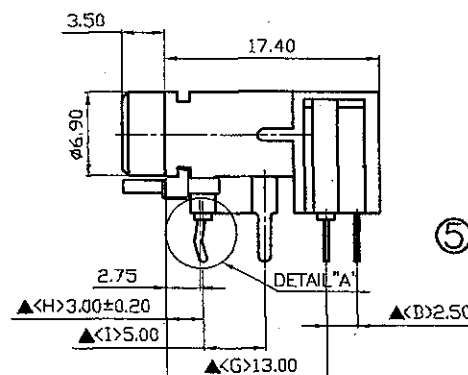
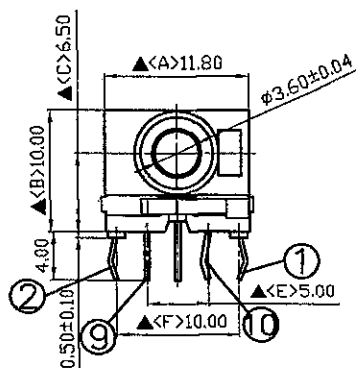




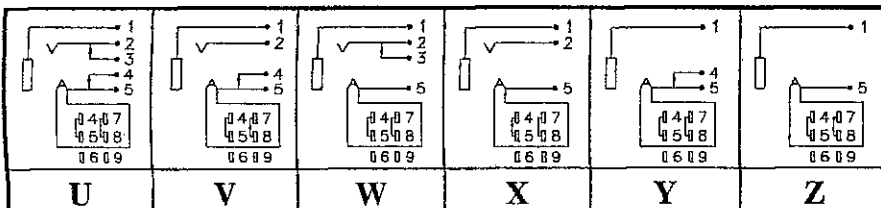

10.	Break Terminal	0.4T Brass	1	Silver Plated
9.	Break Terminal	0.4T Brass	1	Silver Plated
8.	Switch Pin	0.4T Brass	1	Silver Plated
7.	Back Housing Cover	ABS	1	Trans Color
6.	Back Housing	PBT	1	Black Color
5.	Tip Spring	0.25T Phosphor Bronze	1	Silver Plated
4.	Front Housing	PBT	1	
3.	Panel Ground	0.2T Stainless Steel	1	Black Color
2.	Ring Spring	0.3T Phosphor Bronze	1	Silver Plated
1.	Earth Terminal	0.5T Brass	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

DATE	DWN	CHKD
10.10.2011		

PART NAME :3.5 ϕ PHONE JACK

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm

RoHS
Compliant

SPECIFICATIONS:
 Contact Resistance : 30m Ω max
 Insulation Resistance : 100M Ω min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲: The Most Important Dimension

SHOGYO INTERNATIONAL CORP.

SCJ361P00(*)S0B01G