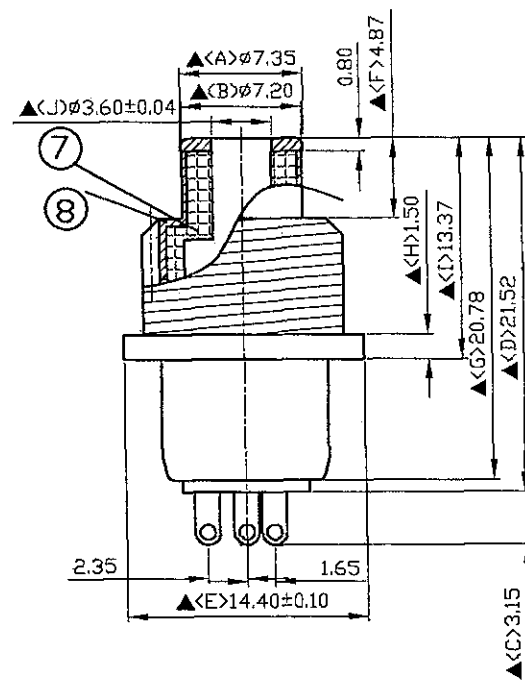

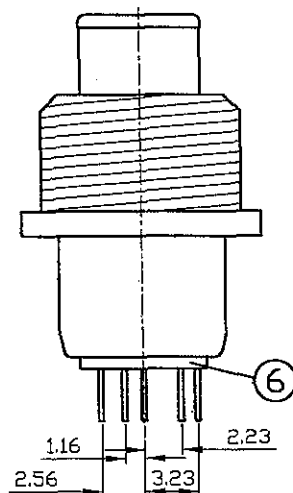
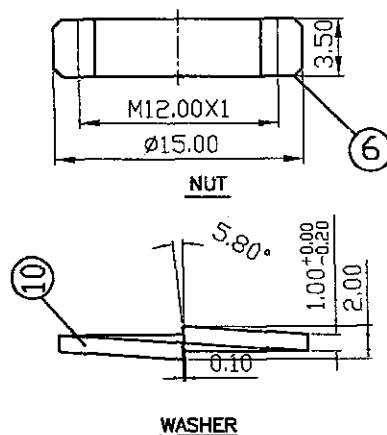
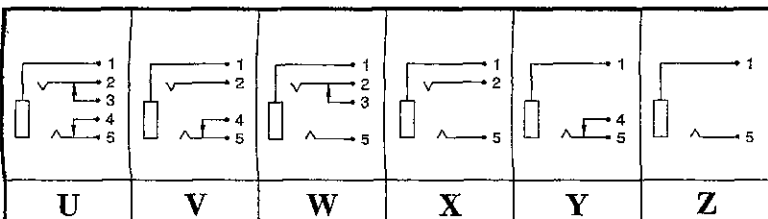


Pin Hole Layout
(Jack Bottom View)

RoHS
Compliant

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

10	Washer	Brass	1	Nickel Plated
9	NUT	Brass	1	Nickel Plated
8	Metal Shell	Brass	1	Nickel Plated
7	Housing	PBT	1	Black Color
6	Cover	PBT	1	Black Color
5	Tip Spring	0.3T Phosphor Bronze	1	Silver Plated
4	Break Terminal	0.3T Brass	1	Silver Plated
3	Break Terminal	0.3T Brass	1	Silver Plated
2	Ring Spring	0.3T Phosphor Bronze	1	Silver Plated
1	Earch Terminal	0.3T Brass	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

DATE	DWN	CHKD
01.04.2012		

PART NAME:3.5Ø PHONE JACK

TOLERANCE:±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SHOGYO INTERNATIONAL CORP.

SCJ392M1N(*)S1000G