


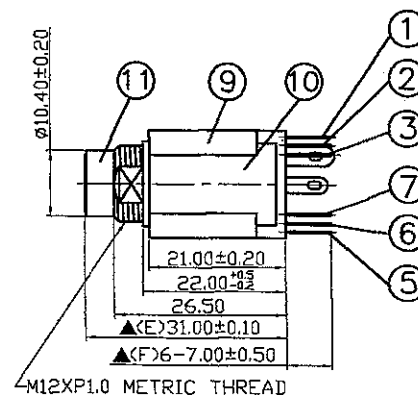




A	B	C	D	E	F	G	H	I	J	K	L	N

16.	Washer	0.5T Iron	1	Nickel Plated
15.	Nut	2.0T Iron	1	Nickel Plated
14.	Insulator	POM	2	Ivory Color
13.	Insulator	Red Vulcanited Fibre	1	Red Color
12.	Bushing	Brass	1	Nickel Plated
11.	Barrel(W/Thread)	PC	1	Black Color
10.	Cover	0.5T Steel	1	Nickel Plated
9.	Housing	POM	1	Black Color
8.	Ring Spring	0.35T Phosphor Bronze	1	Silver Plated
7.	Transfer Terminal	0.3T Brass	1	Silver Plated
6.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
5.	Make Terminal	0.2T Phosphor Bronze	1	Silver Plated
4.	Tip Spring	0.35T Phosphor Bronze	1	Silver Plated
3.	Transfer Terminal	0.4T Brass	1	Silver Plated
2.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
1.	Make Terminal	0.2T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

		DATE	DWN	CHKD
		10.12.2011		
PART NAME : 6.3 ϕ PHONE JACK				
TOLERANCE : ± 0.3 mm UNLESS OTHERWISE SPECIFIED			UNIT:mm	

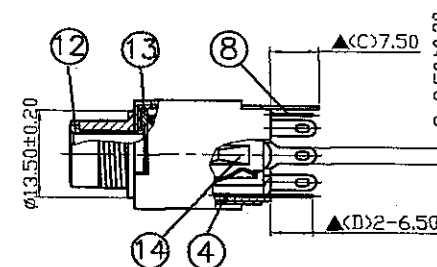

WASHER



NUT

SPECIFICATIONS:

Contact Resistance : 30m Ω max
Insulation Resistance : 100M Ω min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

RoHS
Compliant

SHOGYO INTERNATIONAL CORP.

SCJ610R0N(*)S1B11G