
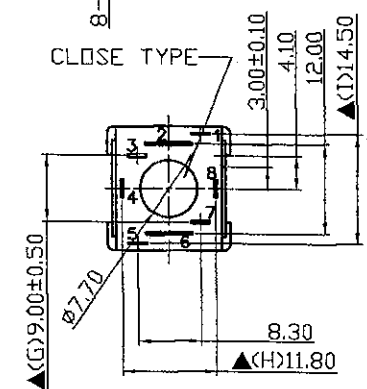

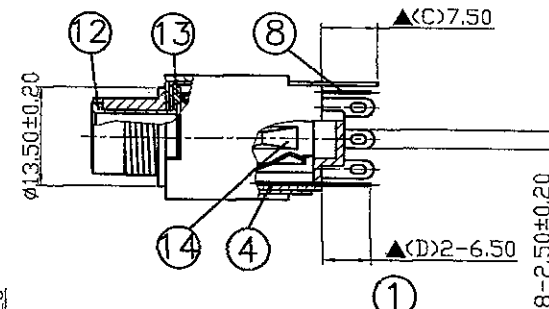



|   |   |   |   |   |   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
|   |   |   |   |   |   |   |   |   |   |   |   |   |
| A | B | C | D | E | F | G | H | I | J | K | L | N |

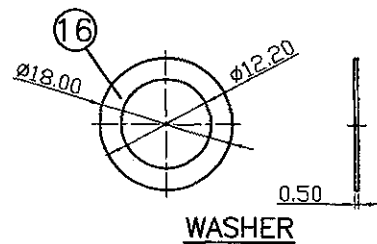

|     |                   |                       |      |               |
|-----|-------------------|-----------------------|------|---------------|
| 16. | Washer            | 0.5T Steel            | 1    | Nickel Plated |
| 15. | Nut               | 2.0T Steel            | 1    | Nickel Plated |
| 14. | Insulator         | POM                   | 2    | Ivory Color   |
| 13. | Insulator         | Red Vulcanited Fibre  | 1    | Red Color     |
| 12. | Bushing           | Brass                 | 1    | Nickel Plated |
| 11. | Barrel(W/Thread)  | PC                    | 1    | Black Color   |
| 10. | Cover             | 0.5T Steel            | 1    | Nickel Plated |
| 9.  | Housing           | POM                   | 1    | Black Color   |
| 8.  | Ring Spring       | 0.35T Phosphor Bronze | 1    | Silver Plated |
| 7.  | Transfer Terminal | 0.3T Brass            | 1    | Silver Plated |
| 6.  | Break Terminal    | 0.35T Phosphor Bronze | 1    | Silver Plated |
| 5.  | Make Terminal     | 0.2T Phosphor Bronze  | 1    | Silver Plated |
| 4.  | Tip Spring        | 0.35T Phosphor Bronze | 1    | Silver Plated |
| 3.  | Transfer Terminal | 0.4T Brass            | 1    | Silver Plated |
| 2.  | Break Terminal    | 0.35T Phosphor Bronze | 1    | Silver Plated |
| 1.  | Make Terminal     | 0.2T Phosphor Bronze  | 1    | Silver Plated |
| NO. | Description       | Material              | Q'TY | Finish        |

|            |     |      |
|------------|-----|------|
| DATE       | DWN | CHKD |
| 10.12.2011 |     |      |

SPECIFICATIONS:  
 Contact Resistance : 30mΩ max  
 Insulation Resistance : 100MΩ min. at DC 500V  
 Dielectric Withstand Voltage : AC 500V for one minute  
 Remark: ▲: The Most Important Dimension

RoHS  
Compliant

PART NAME :6.3φ PHONE JACK

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm

**SHOGYO INTERNATIONAL CORP.**

# SCJ610R0N(\*)S1B21G