

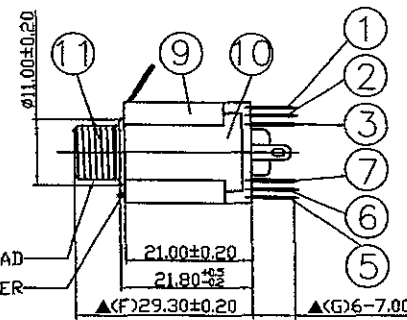
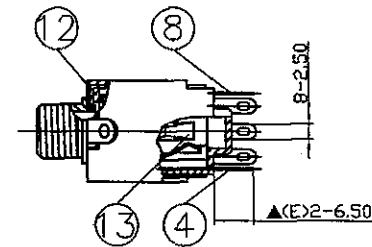




A	B	C	D	E	F	G	H	I	J	K	L	N



M9XP0.75 METRIC THREAD
WITH STOPPER



NUT



WASHER

15	Washer	0.5T Steel	1	Nickel Plated
14	Nut	2.0T Steel	1	Nickel Plated
13	Insulator	POM	1	Ivory Color
12	Insulator	Red Vulcanited Fibre	1	Red Color
11	Barrel(W/Thread)	Brass	1	Nickel Plated
10	Cover	0.5T Steel	1	Nickel Plated
9	Housing	POM	1	Black Color
8	Ring Spring	0.35T Phosphor Bronze	1	Silver Plated
7	Transfer Terminal	0.3T Brass	1	Silver Plated
6	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
5	Make Terminal	0.2T Phosphor Bronze	1	Silver Plated
4	Tip Spring	0.35T Phosphor Bronze	1	Silver Plated
3	Transfer Terminal	0.4T Brass	1	Silver Plated
2	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
1	Make Terminal	0.2T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	

DATE DWN CHKD

10.12.2011

PART NAME : 6.3φ PHONE JACK

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm

RoHS
Compliant

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

SHOGYO INTERNATIONAL CORP.

SCJ614M2N(*)S3B22G