


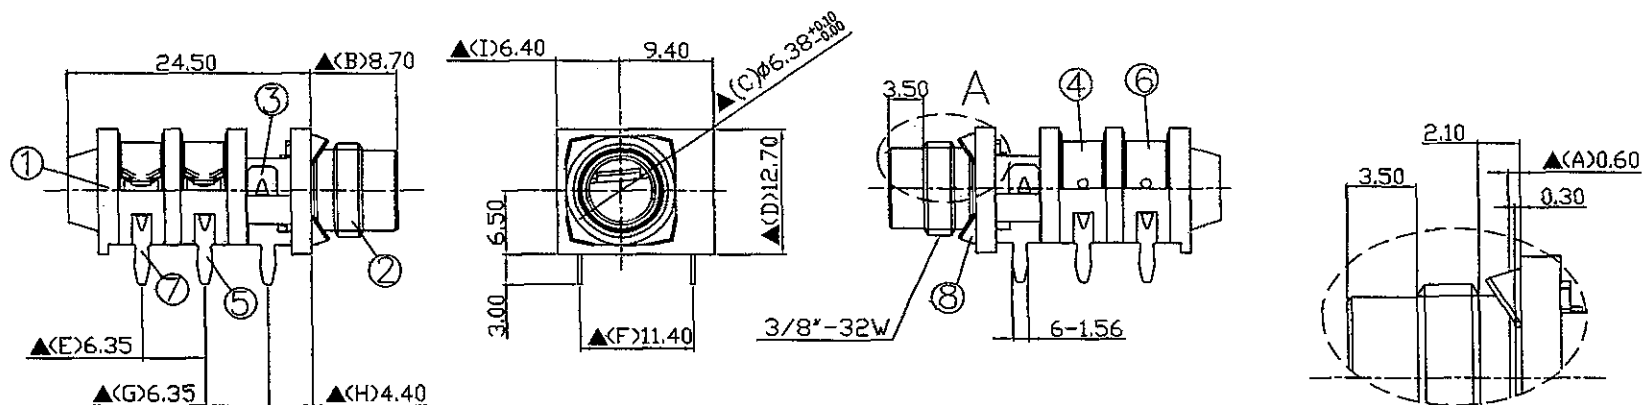
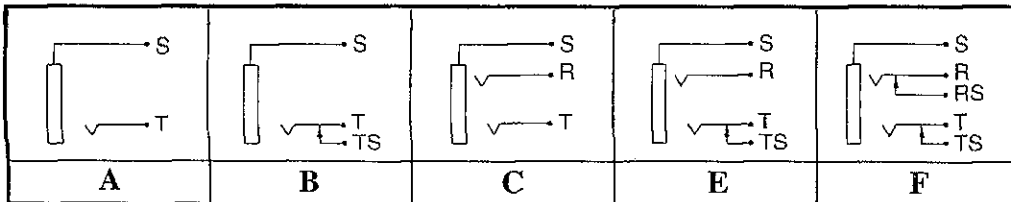


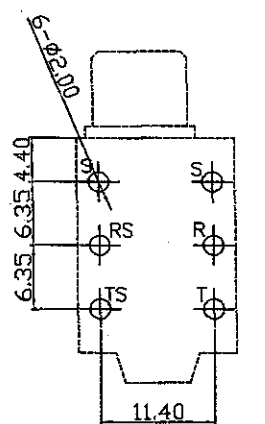


10.	Nut	2.2T Brass	1	Nickel Plated
9.	Washer	0.4T Brass	1	Nickel Plated
8.	Earth Spring	0.3T Steel	1	Nickel Plated
7.	Tip Shunt	0.4T Bronze	1	Silver Plated
6.	Tip Spring	0.4T Phosphor Bronze	1	Silver Plated
5.	Ring Shunt	0.4T Bronze	1	Silver Plated
4.	Ring Spring	0.4T Phosphor Bronze	1	Silver Plated
3.	Sleeve Shunt	0.4T Bronze	1	Silver Plated
2.	Barrel	Brass	1	Nickel Plated
1.	Housing	PA66	1	Black Color
NO.	Description	Material	Q'TY	Finish

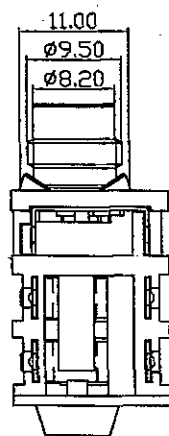

Pin Hole Layout
(Jack Bottom View)



WASHER

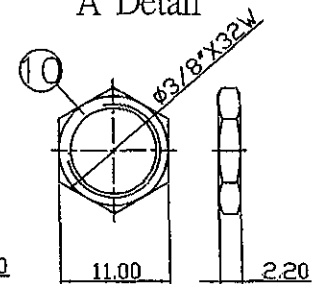

NUT

RoHS
Compliant

SPECIFICATIONS:
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲: The Most Important Dimension

SHOGYO INTERNATIONAL CORP.

SCJ635M6N(*)S4BP0G

PART NAME : 6.3Φ PHONE JACK

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



DATE	DWN	CHKD
10.12.2011		