


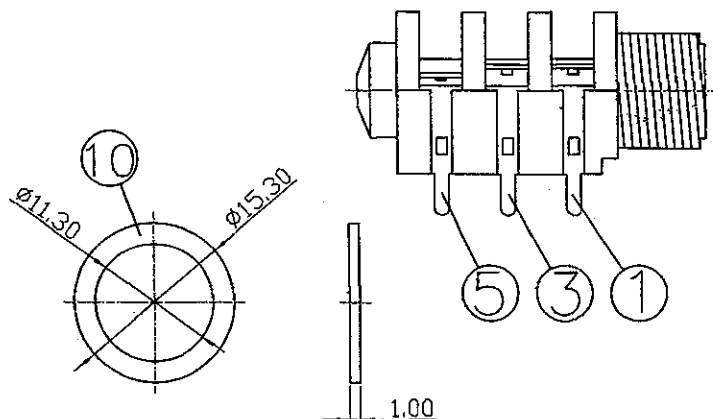


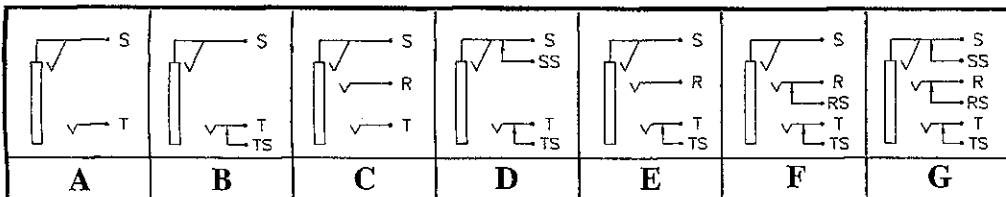



WASHER

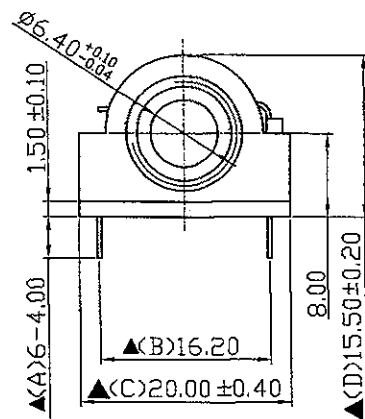

Ø7/16*×G20 METRIC THREAD

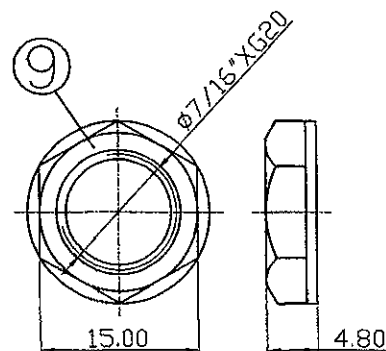

NUT

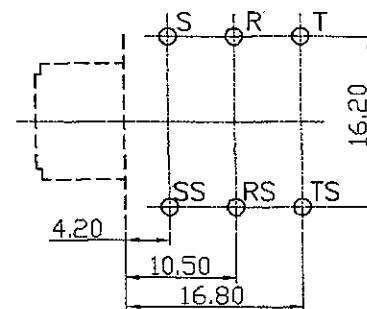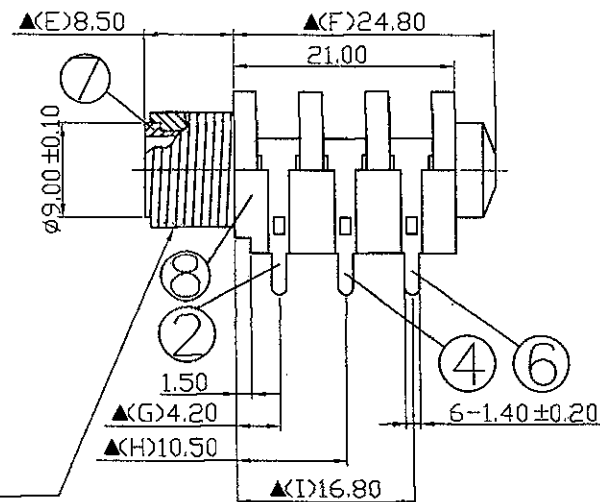

Pin Hole Layout
(Jack Bottom View)

10.	Washer	PAPER SHEET t1.0	1	Red Color
9.	Nut-Hexagon	PA66	1	Black Color
8.	Housing	PA66	1	Black Color
7.	Metal	Brass	1	Nickel Plated
6.	Tip Spring	0.4T Phosphor Bronze	1	Silver Plated
5.	Tip Shunt	0.4T Bronze	1	Silver Plated
4.	Ring Spring	0.4T Phosphor Bronze	1	Silver Plated
3.	Ring Shunt	0.4T Bronze	1	Silver Plated
2.	Sleeve Spring	0.4T Phosphor Bronze	1	Silver Plated
1.	Sleeve Shunt	0.4T Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

DATE	DWN	CHKD
10.12.2011		

PART NAME : 6.30 PHONE JACK

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SPECIFICATIONS:

Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark : ▲ : The Most Important Dimension

RoHS
Pb Free Process

SHOGYO INTERNATIONAL CORP.

SCJ638R4N(*)S5BP0G