


10.	Washer	PAPER SHEET t1.0	1	Red Color
9.	Nut-Hexagon	PA66	1	Black Color
8.	Housing	PA66	1	Black Color
7.	Metal	Brass	1	Nickel Plated
6.	Tip Spring	0.4T Phosphor Bronze	1	Silver Plated
5.	Tip Shunt	0.4T Bronze	1	Silver Plated
4.	Ring Spring	0.4T Phosphor Bronze	1	Silver Plated
3.	Ring Shunt	0.4T Bronze	1	Silver Plated
2.	Sleeve Spring	0.4T Phosphor Bronze	1	Silver Plated
1.	Sleeve Shunt	0.4T Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

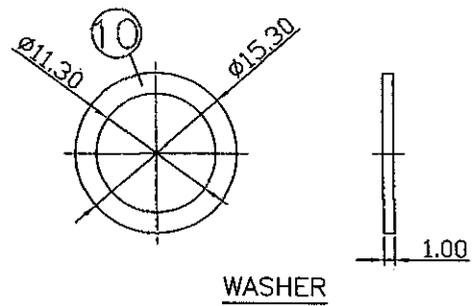

DATE	DWN	CHKD
10.12.2011		

SPECIFICATIONS:  
 Contact Resistance : 30mΩ max  
 Insulation Resistance : 100MΩ min. at DC 500V  
 Dielectric Withstand Voltage : AC 500V for one minute  
 Remark: ▲: The Most Important Dimension

RoHS  
Pb Free Process

PART NAME : 6.3Φ PHONE JACK

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm

**SHOGYO INTERNATIONAL CORP.**

# SCJ638R4N(\*)S5BW0G