
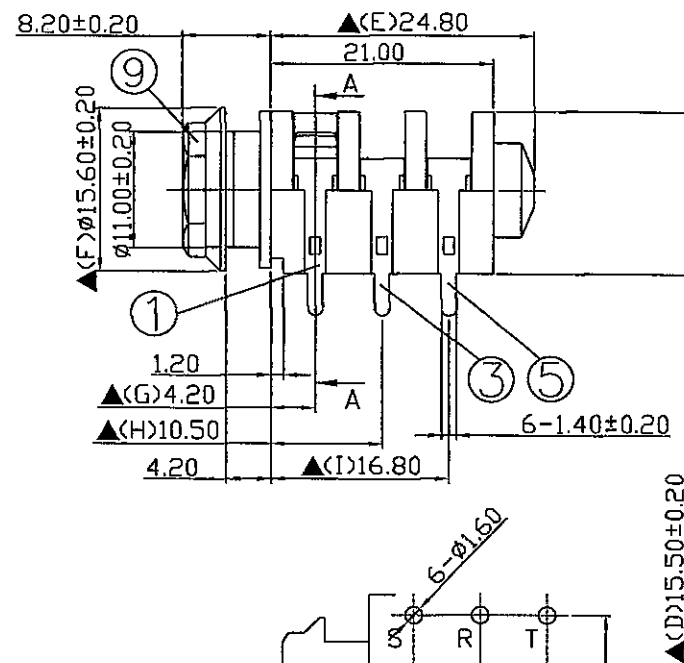
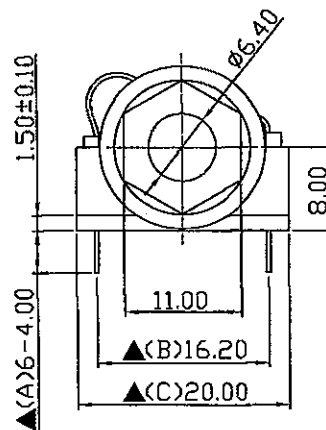
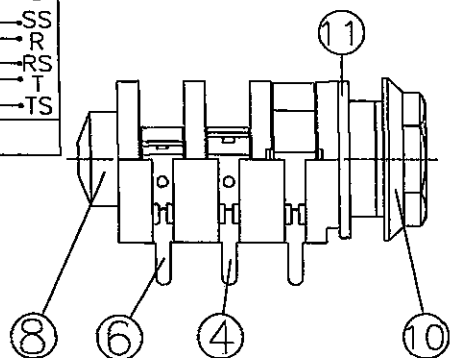



A-A剖面

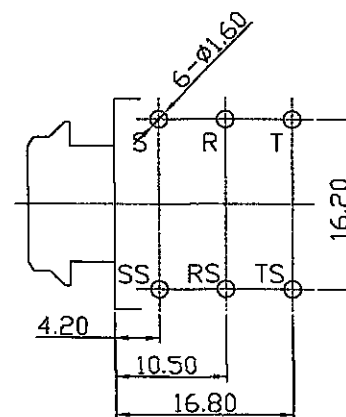

Pin Hole Layout
(Jack Bottom View)

11.	Washer	PAPER SHEET t1.0	1	Red Color
10.	Bushing	PA66	1	Black Color
9.	Nut-Metal	Brass	1	Nickel Plated
8.	Housing	PA66	1	Black Color
7.	Bottom Spring	0.4T Phosphor Bronze	1	Tin Plated
6.	Tip Shunt	0.4T Bronze	1	Tin Plated
5.	Tip Spring	0.4T Phosphor Bronze	1	Tin Plated
4.	Ring Shunt	0.4T Bronze	1	Tin Plated
3.	Ring Spring	0.4T Phosphor Bronze	1	Tin Plated
2.	Sleeve Shunt	0.4T Phosphor Bronze	1	Tin Plated
1.	Sleeve Spring	0.4T Phosphor Bronze	1	Tin Plated
NO.	Description	Material	Q'TY	Finish

DATE	DWN	CHKD
10.12.2011		

PART NAME : 6.3Ø PHONE JACK

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm

SPECIFICATIONS:

Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstand Voltage : AC 500V for one minute
 Remark: ▲: The Most Important Dimension

RoHS
Pb Free Process

SHOGYO INTERNATIONAL CORP.

SCJ647R5NHT0BP0G