
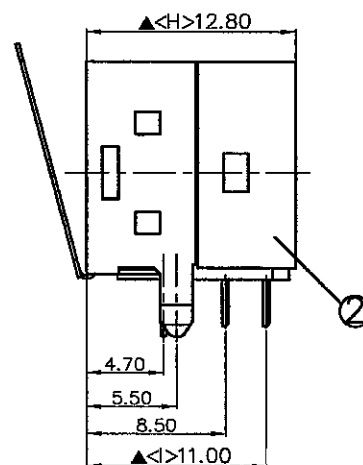
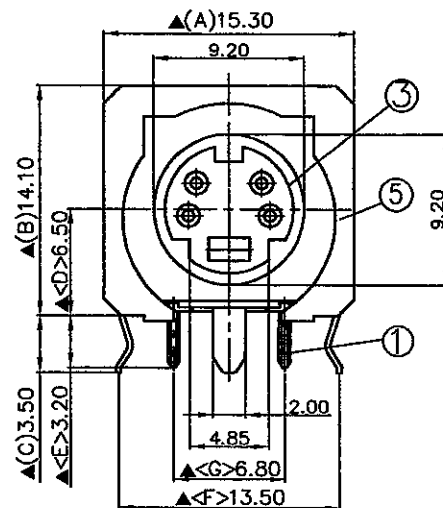



Arrangement of Contact

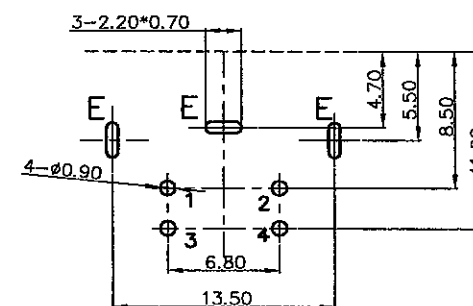

Pin Hole Layout
(Jack Bottom View)

5.	Panel Ground	0.20T Stainless Steel SUS301X3/4	1	
4.	Cover	PBT UL 94 V-0	1	Black Color
3.	Housing	PBT UL 94 V-0	1	Black Color
2.	Metal Shell	0.3T Brass	1	Nickel Plating
1.	Terminal	0.2T Phosphor Bronze	4	Gold flash Plated Contact & Terminal Plated With Tin Over 50u"(Min) Nickel
NO.	Description	Material	Q'TY	Finish

		DATE	DWN	CHKD	APVD	MANAGER
		10.19.2011				
PART NAME : MINI DIN JACK						VERSION:4.0
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED			UNIT:mm	⊕	SCALE:1/1	

SPECIFICATIONS:

Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲ : The Most Important Dimension

RoHS
Compliant

For Reference
僅供參考

SHOGYO INTERNATIONAL CORP.

#SCN554S4GTNB020G