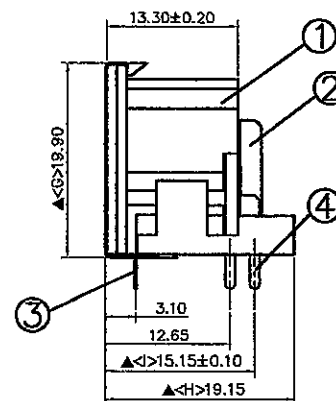
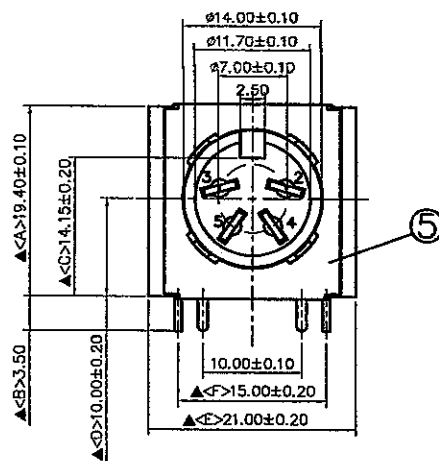



Pin Hole Layout
(Jack Bottom View)

6.	Shell	0.15T Phosphor Bronze	1	Silver Plating
5.	Terminal	0.7T Brass	4	Silver Plating
3.	Earth Terminal	0.2T Phosphor Bronze	1	Silver Plating
2.	Cover	PBT+30%G	1	Black Color
1.	Housing	PBT+30%G	1	Black Color
NO.	Description	Material	Q'TY	Finish

DATE	DWN	CHKD	APVD	MANAGER
10.19.2011				

PART NAME : DIN JACK

VERSION:8.0

TOLERANCE : $\pm 0.3\text{mm}$ UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

RoHS
Compliant

For Reference
僅供參考

SPECIFICATIONS:

1. Rating: 11V AC 1A max or 12V DC 2A max
2. Insulation Resistance : $50\text{M}\Omega$ min. at DC 500V
3. Dielectric Strength : AC 500V for one minute
4. Remark: Δ : The Most Important Dimension

SHOGYO INTERNATIONAL CORP.

#SCN600S4SS00000G