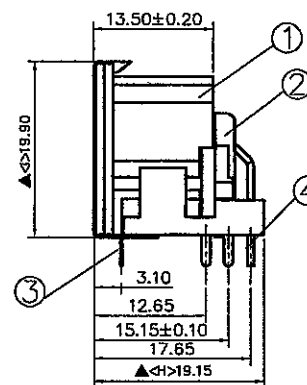
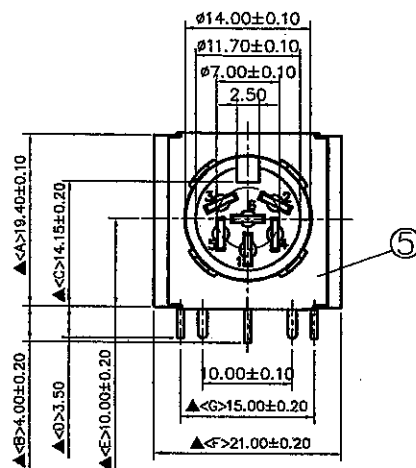



Pin Hole Layout
(Jack Bottom View)

5.	Shell	0.15T Phosphor Bronze	1	Silver Plating
4.	Terminal	0.7T Brass	6	Silver Plating
3.	Earth Terminal	0.2T Phosphor Bronze	1	Silver Plating
2.	Cover	PBT+30%G	1	Black Color
1.	Housing	PBT+30%G	1	Black Color
NO.	Description	Material	Q'TY	Finish

DATE	DWN	CHKD	APVD	MANAGER
10.19.2011				

PART NAME : DIN JACK				VERSION:8.0	
TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED			UNIT:mm		SCALE:1/1

SPECIFICATIONS:

- Rating: 11V AC 1A max or 12V DC 2A max
- Insulation Resistance : 50M Ω min. at DC 500V
- Dielectric Strength: : AC 500V for one minute
- Remark: $\triangle$: The Most Important Dimension

RoHS
Compliant

For Reference
僅供參考

SHOGYO INTERNATIONAL CORP.
#SCN600S6SS00000G