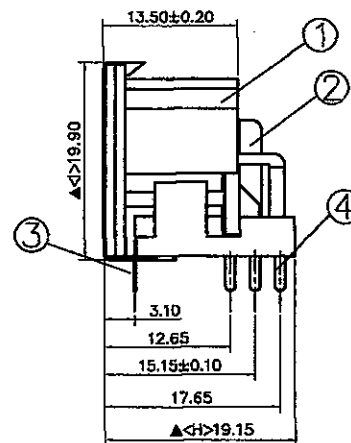

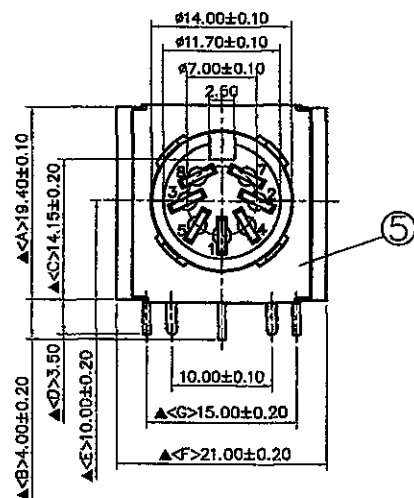



Pin Hole Layout
(Jack Bottom View)

5.	Shell	0.15T Phosphor Bronze	1	Silver Plating
4.	Terminal	0.7T Brass	7	Silver Plating
3.	Earth Terminal	0.2T Phosphor Bronze	1	Silver Plating
2.	Cover	PBT+30%G	1	Black Color
1.	Housing	PBT+30%G	1	Black Color
NO.	Description	Material	Q'TY	Finish

		DATE	DWN	CHKD	APVD	MANAGER
		10.19.2011				
PART NAME : DIN JACK						VERSION:8.0
TOLERANCE : $\pm 0.3\text{mm}$ UNLESS OTHERWISE SPECIFIED			UNIT:mm		SCALE:1/1	

SPECIFICATIONS:

- Rating: 11V AC 1A max or 12V DC 2A max
- Insulation Resistance : $50\text{M}\Omega$ min. at DC 500V
- Dielectric Strength: : AC 500V for one minute
- Remark: Δ : The Most Important Dimension

RoHS
Compliant

For Reference
僅供參考

SHOGYO INTERNATIONAL CORP.

#SCN600S7SS00000G