


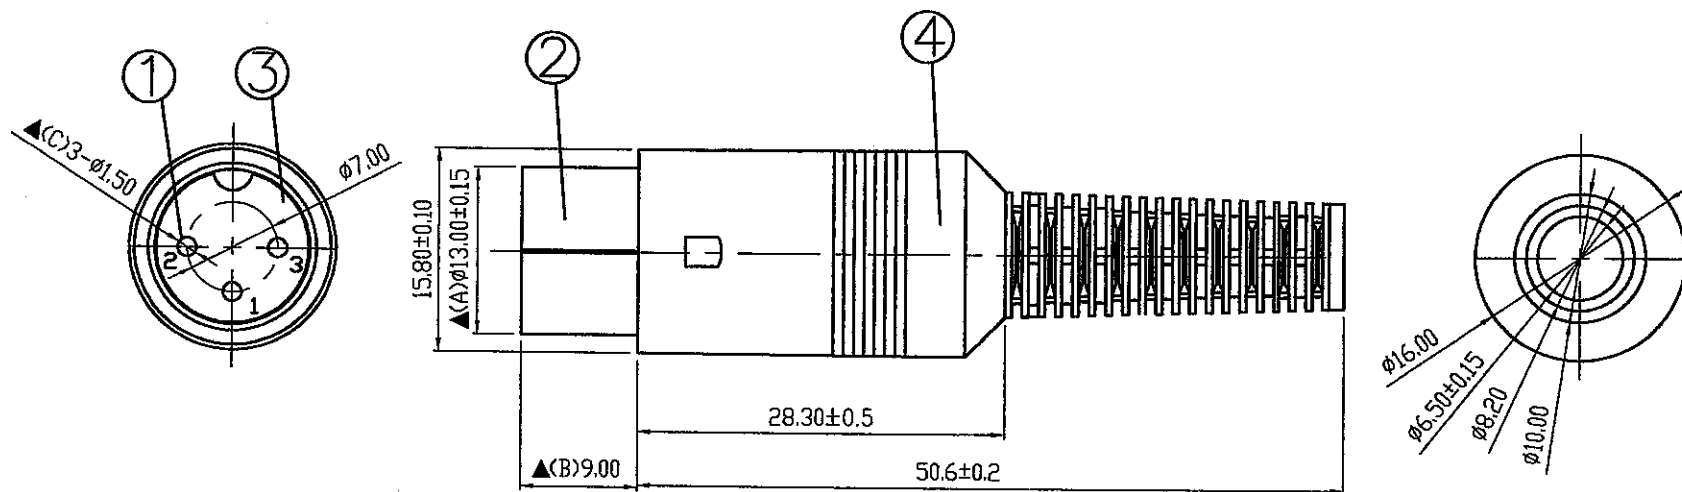

Arrangement of Contact

4.	BOOT	PVC	1	Black Color
3.	Insulator	PBT	1	Black Color
2.	Shell	STEEL	2	Nickel Plated
1.	Pin	Brass	3	Nickel Plated
NO.	Description	Material	Q'TY	Finish

		DATE	DWN	CHKD	APVD	MANAGER
		07.19.2010				
PART NAME : DIN PLUG					VERSION:5.0	
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED			UNIT:mm	⊕ ⊖	SCALE:1/1	

SPECIFICATIONS:

Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstand Voltage : AC 500V for one minute
 Remark: ▲: The Most Important Dimension

RoHS
Compliant

For Reference
僅供參考

SHOGYO INTERNATIONAL CORP.

#SCN680P03NN0000G