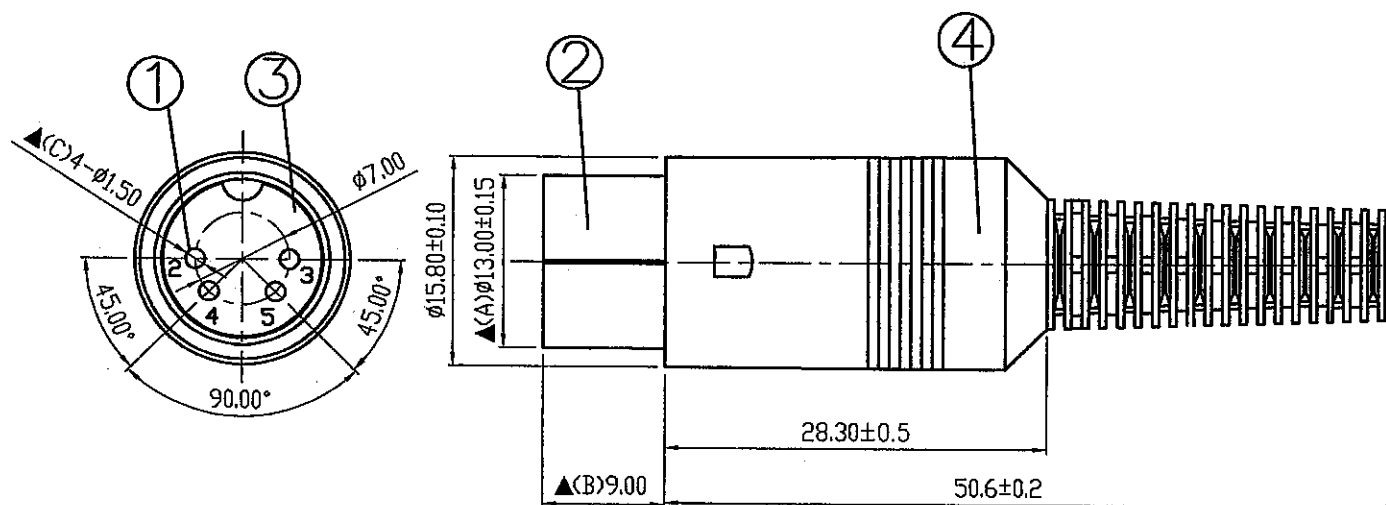


Arrangement of Contact

4.	BOOT	PVC	1	Black Color
3.	Insulator	PBT	1	Black Color
2.	Shell	STEEL	2	Nickel Plated
1.	Pin	Brass	4	Nickel Plated
NO.	Description	Material	Q'TY	Finish

DATE	DWN	CHKD	APVD	MANAGER
07.19.2010				

PART NAME : DIN PLUG

VERSION:5.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

RoHS
Compliant

For Reference
僅供參考

SPECIFICATIONS:
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstand Voltage : AC 500V for one minute
 Remark: ▲ : The Most Important Dimension

SHOGYO INTERNATIONAL CORP.

#SCN680P04NN0000G