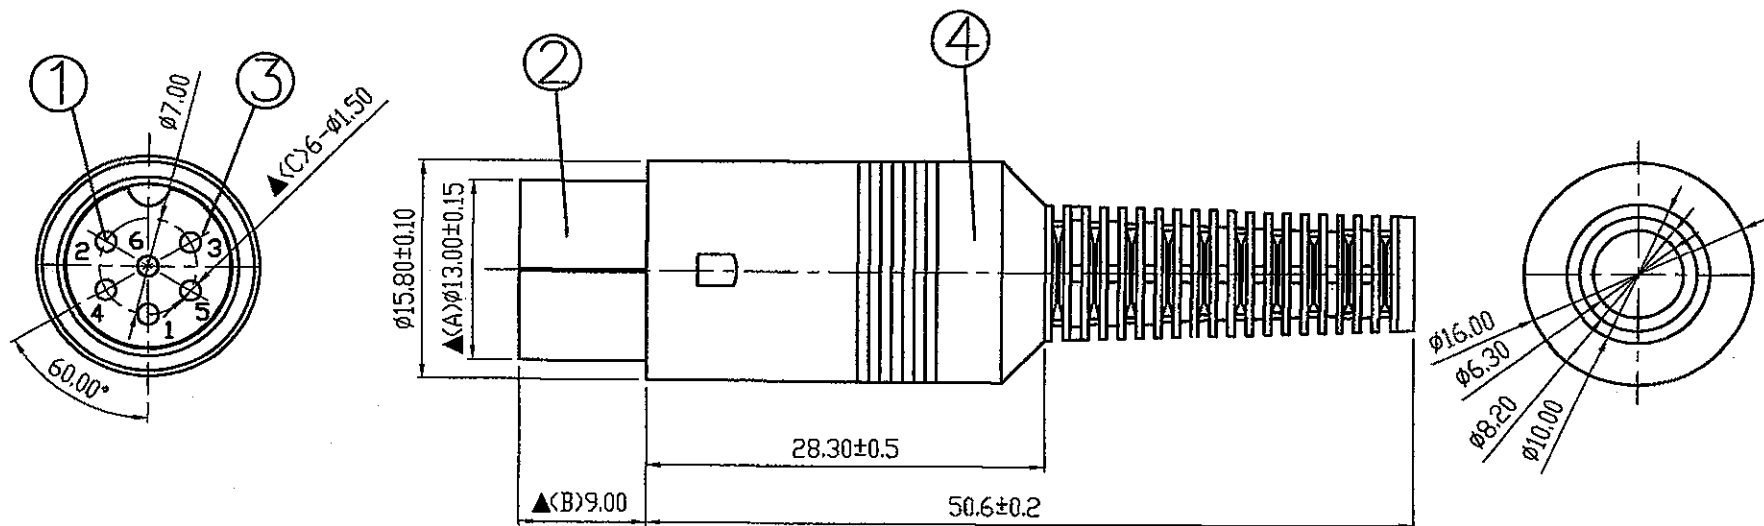


Arrangement of Contact

4.	BOOT	PVC	1	Black Color
3.	Insulator	PBT	1	Black Color
2.	Shell	STEEL	2	Nickel Plated
1.	Pin	Brass	6	Nickel Plated
NO.	Description	Material	Q'TY	Finish

DATE	DWN	CHKD	APVD	MANAGER
07.19.2010				

PART NAME : MINI DIN PLUG

VERSION:5.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE: /

RoHS
Compliant

For Reference
僅供參考

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension

SHOGYO INTERNATIONAL CORP.

SCN680P06NN0000G