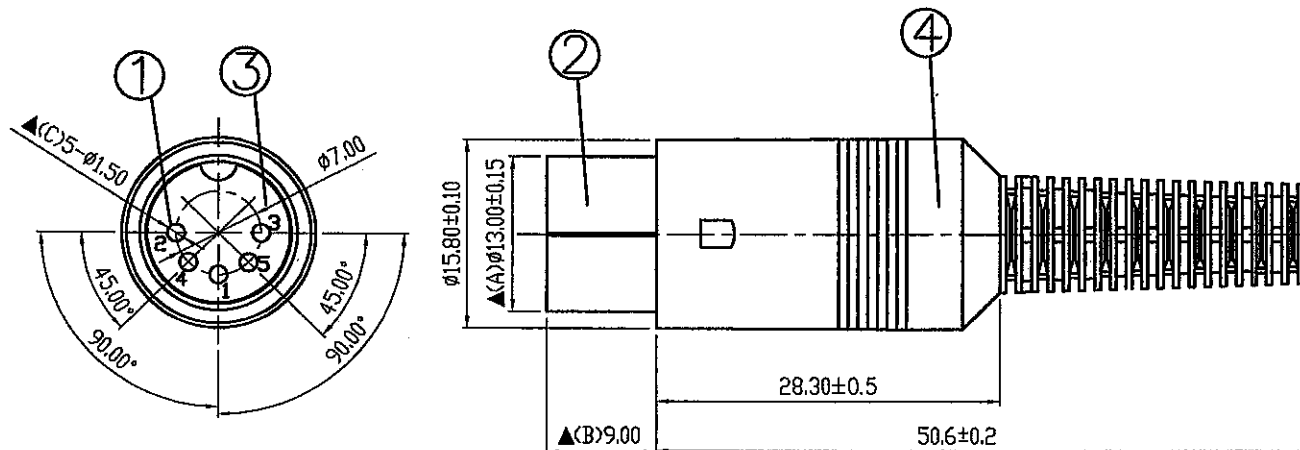


Arrangement of Contact

4.	BOOT	PVC	1	Black Color
3.	Insulator	PBT	1	Black Color
2.	Shell	STEEL	2	Nickel Plated
1.	Pin	Brass	5	Nickel Plated
NO.	Description	Material	Q'TY	Finish

DATE	DWN	CHKD	APVD	MANAGER
07.19.2010				

PART NAME : DIN PLUG

VERSION:5.0.

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1.

SPECIFICATIONS:



Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstand Voltage : AC 500V for one minute
 Remark ▲ : The Most Important Dimension

RoHS
Compliant

For Reference
僅供參考

SHOGYO INTERNATIONAL CORP.

SCN680P05NN1000G

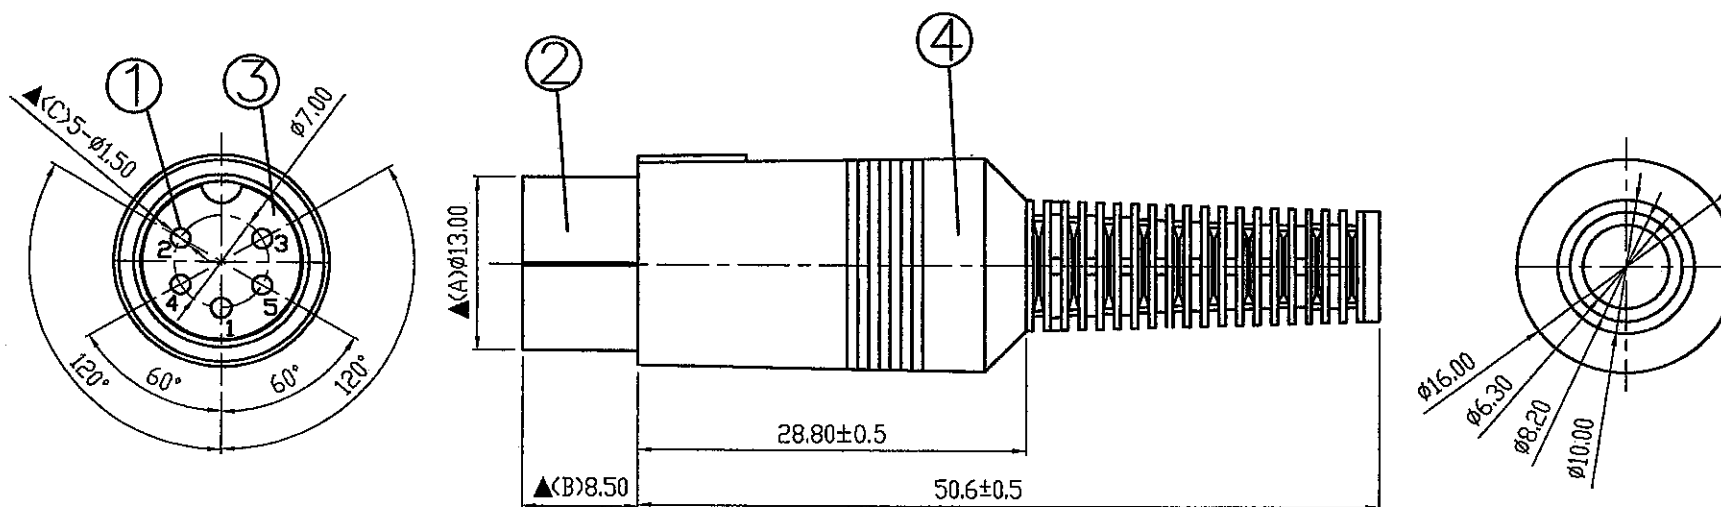

Arrangement of Contact

4.	BOOT	PVC	1	Black Color
3.	Insulator	PBT	1	Black Color
2.	Shell	STEEL	2	Nickel Plated
1.	Pin	Brass	5	Nickel Plated
NO.	Description	Material	Q'TY	Finish

DATE	DWN	CHKD	APVD	MANAGER
12.12.2005				

PART NAME : DIN PLUG

VERSION:3.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:

RoHS
Compliant



For Reference
僅供參考

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲ : The Most Important Dimension

SHOGYO INTERNATIONAL CORP.

SCN680P05NN2000G

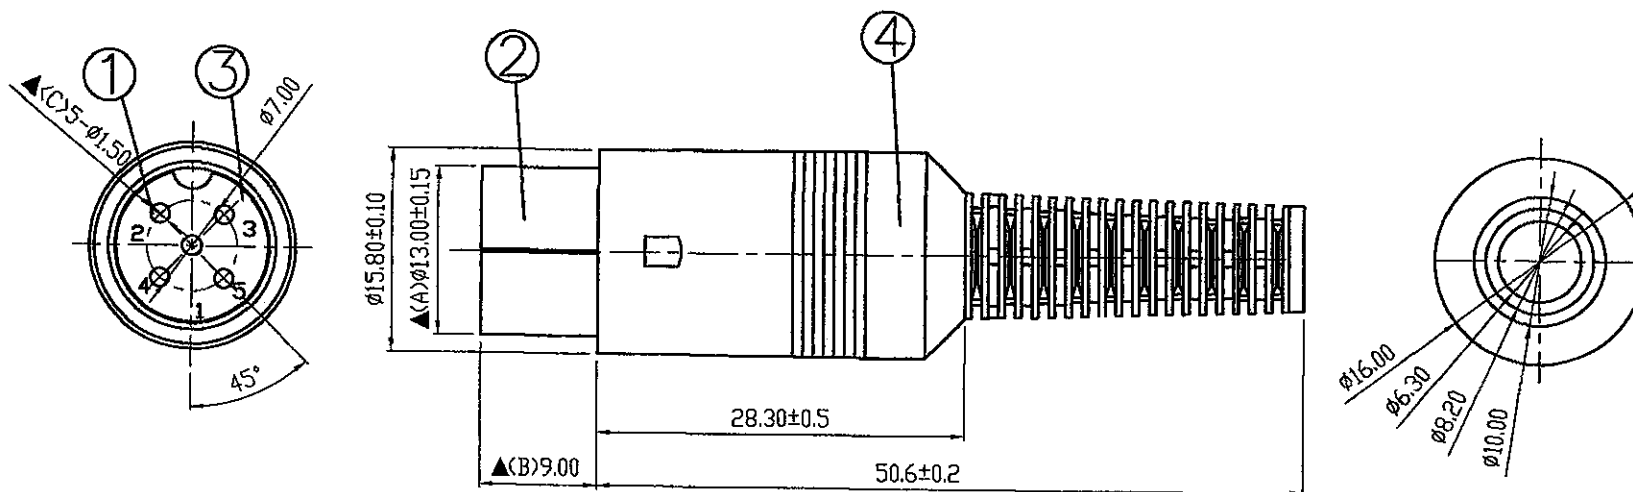

Arrangement of Contact

4.	BOOT	PVC	1	Black Color
3.	Insulator	PBT	1	Black Color
2.	Shell	STEEL	2	Nickel Plated
1.	Pin	Brass	5	Nickel Plated
NO.	Description	Material	Q'TY	Finish

		DATE	DWN	CHKD	APVD	MANAGER
		07.19.2010				
PART NAME : DIN PLUG		VERSION:2.0				
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED			UNIT:mm	⊕ ⊖	SCALE:1/1	

SPECIFICATIONS:

Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstand Voltage : AC 500V for one minute
 Remark: ▲: The Most Important Dimension



SHOGYO INTERNATIONAL CORP.

#SCN680P05NN3000G