
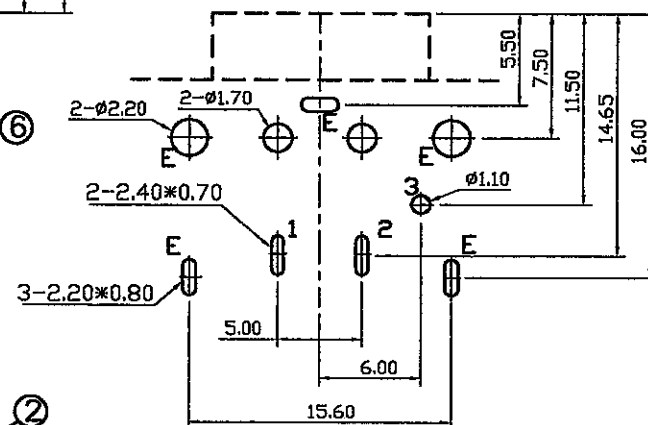

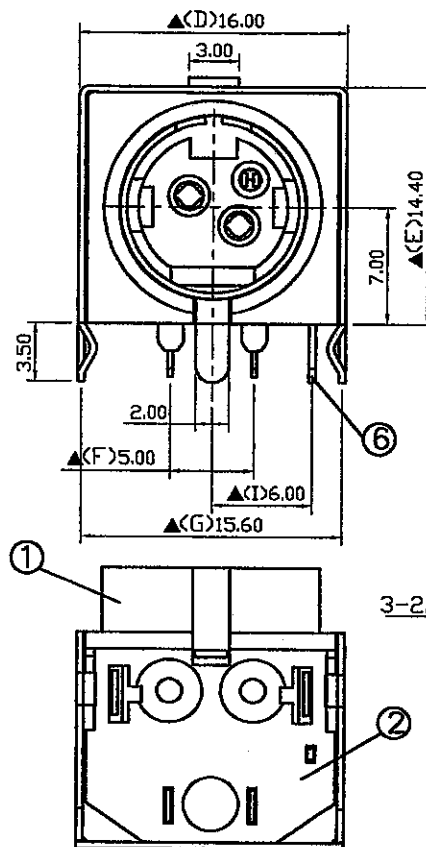


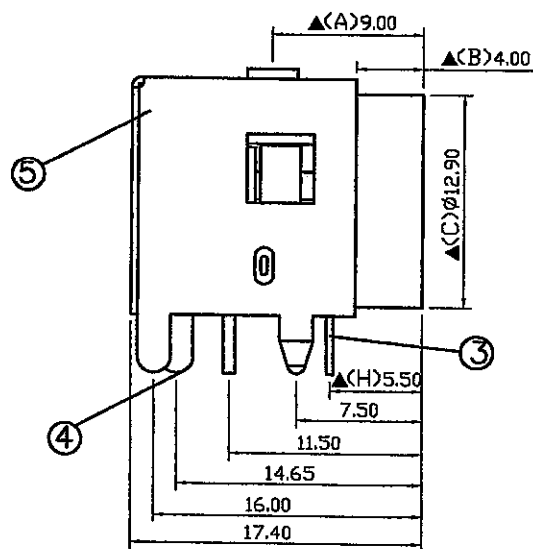

Pin Hole Layout
<Jack Bottom View>

6	Terminal	0.2T Phosphor copper	1	Silver Plated
5.	Metal Shell	0.4T Steel	1	Nickel Plated
4.	Terminal	0.3T Brass	2	Silver Plated
3.	Inner shield	0.4T Brass	1	Nickel Plated
2.	Cover	PBT	1	Black Color
1.	Housing	PBT	1	Black Color
NO.	Description	Material	Q'TY	Finish

DATE	DWN	CHKD	APVD	MANAGER
10.19.2011	韩沙			

PART NAME : MINI DIN JACK

VERSION: 3.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension

RoHS
Compliant

SHOGYO INTERNATIONAL CORP.

#SCN773S3NSNB003G