

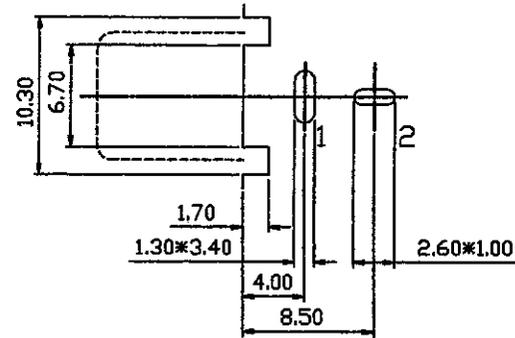
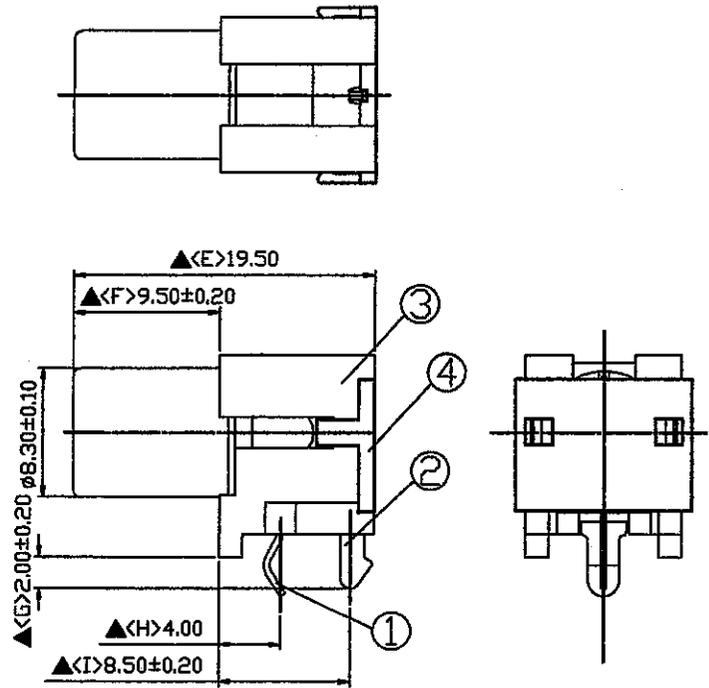



SCHEMATIC	
MODEL NO	U

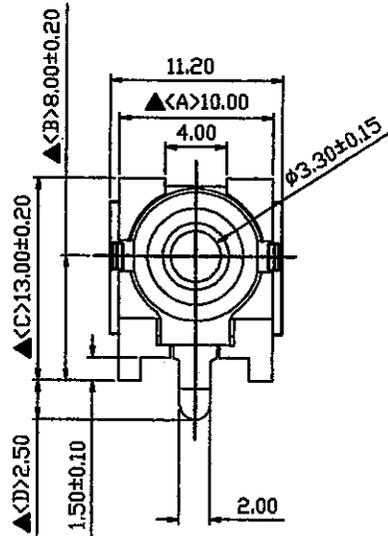

Pin Hole Layout
(Jack Bottom View)

4.	Cover	ABS	1	Black Color
3.	Housing	PBT	1	Black Color
2.	Pin	0.6T Brass	1	Silver Plated
1.	Earth Terminal (Barrel)	0.4T Brass	1	Nickel Plated
NO.	Description	Material	Q'TY	Finish

SPECIFICATIONS:
See "Details of Environment-Related Substance"
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

		DATE	DWN	CHKD	APVD	MANAGER
		2014.03.27	王放策			
PART NAME : PIN JACK					VERSION:2.0	
TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED				UNIT:mm		SCALE: /

SHOGYO INTERNATIONAL CORP.

#SCP625UNS1000CG