
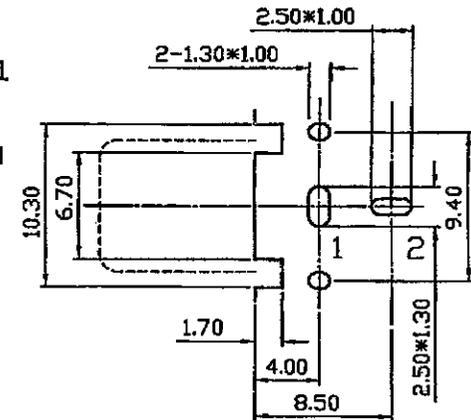

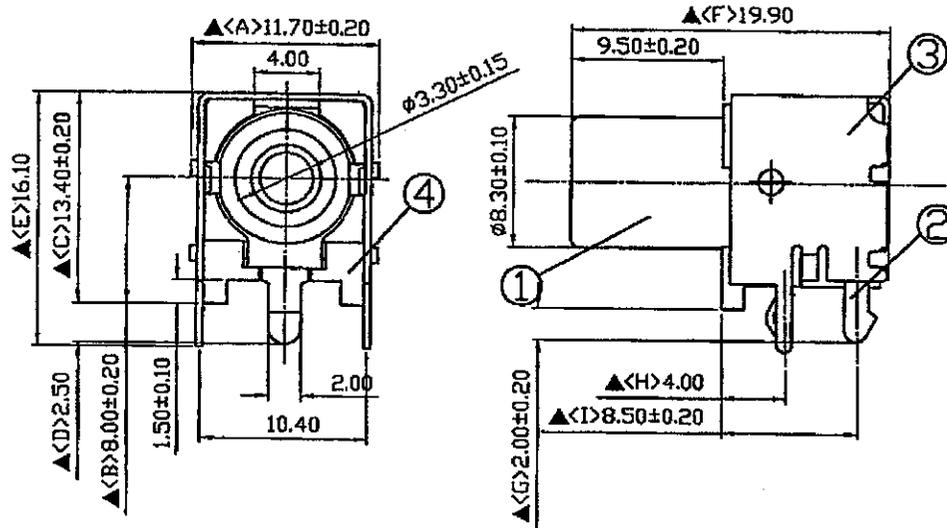


SCHEMATIC	
MODEL NO	U



Pin Hole Layout
(Jack Bottom View)

4.	Housing	PBT	1	Black Color
3.	Metal Shell	0.4T Iron	1	Nickel Plated
2.	Pin	0.6T Brass	1	Silver Plated
1.	Earth Terminal (Barrel)	0.4T Brass	1	Nickel Plated
NO.	Description	Material	Q'TY	Finish


DATE	DWN	CHKD	APVD	MANAGER
10.18.2011	韩沙	张	李	李

PART NAME :PIN JACK

VERSION:3.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max.
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark : ▲: The Most Important Dimension

RoHS
Compliant

SHOGYO INTERNATIONAL CORP.

#SCP625UNS1N0000G