

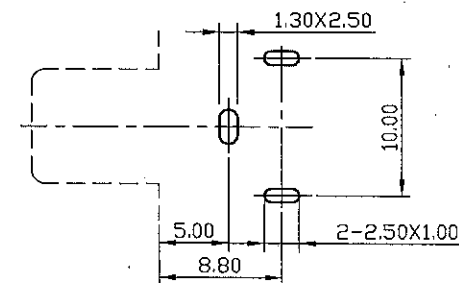


SCHEMATIC	
MODEL NO	V

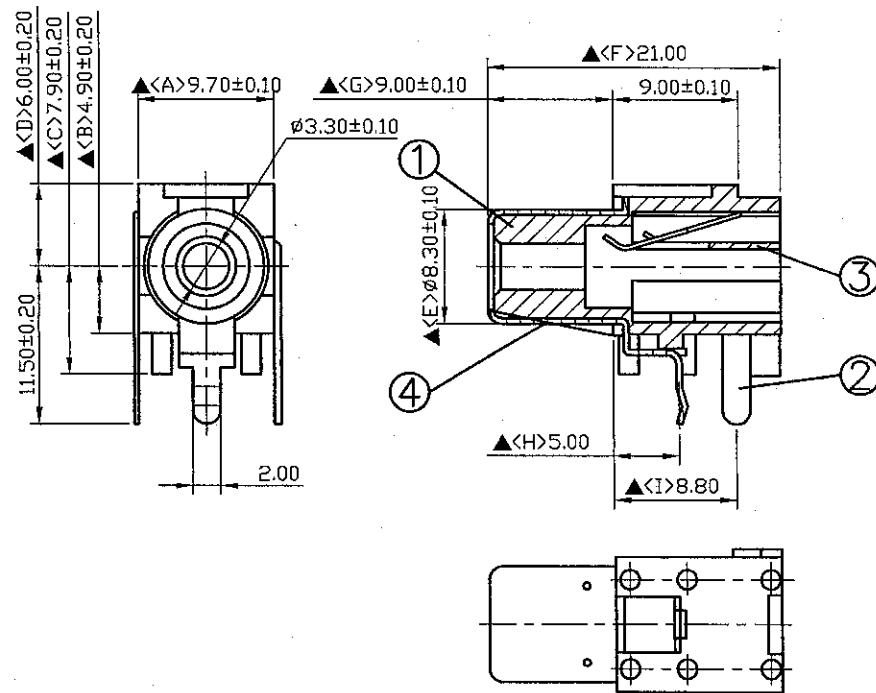

Pin Hole Layout
(Jack Bottom View)

4.	Barrel (Sleeve)	0.4T Brass	1	Nickel Plated
3.	Spring Terminal	0.3T Phosphor Bronze	1	Silver Plated
2.	Break Terminal	0.5T Brass	1	Silver Plated
1.	Plastic Body	P.B.T (UL 94V-0)	1	Black Color
NO.	Description	Material	Q'TY	Finish

		DATE	DWN	CHKD
		06.16.2008		
PART NAME : PIN JACK				
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED		UNIT:mm		

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension

RoHS
Compliant

For Reference
僅供參考

SHOGYO INTERNATIONAL CORP.

SCP628VNS100000G