
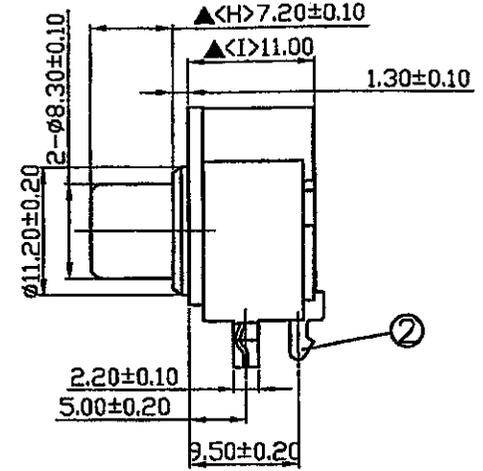


Pin Hole Layout  
(Jack Bottom View)

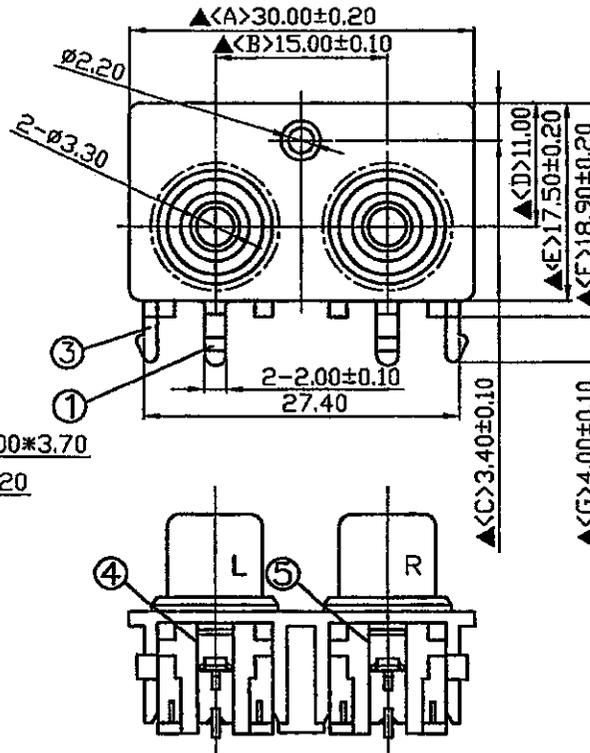

5.	Housing	PBT	1	Red Color
4.	Housing	PBT	1	White Color
3.	Base	PBT	1	Black Color
2.	Break Terminal	0.6T Brass	2	Silver Plated
1.	Earth Terminal	0.4T Brass	2	Nickel Plated
NO.	Description	Material	Q'TY	Finish

DATE	DWN	CHKD	APVD	MANAGER
10.14.2011	王展鴻	[Signature]	[Signature]	[Signature]

PART NAME: PIN JACK	VERSION: 2.0
TOLERANCE: $\pm 0.3\text{mm}$ UNLESS OTHERWISE SPECIFIED	UNIT: mm
	SCALE: 1/1

RoHS  
Compliant

SPECIFICATIONS:  
 Contact Resistance : 30mΩ max  
 Insulation Resistance : 100MΩ min.at DC500V  
 Dielectric Withstand Voltage: AC 500V for one minute  
 Remark: ▲: The Most Important Dimension

**SHOGYO INTERNATIONAL CORP.**  
**#SCP661BNS320U00G**