
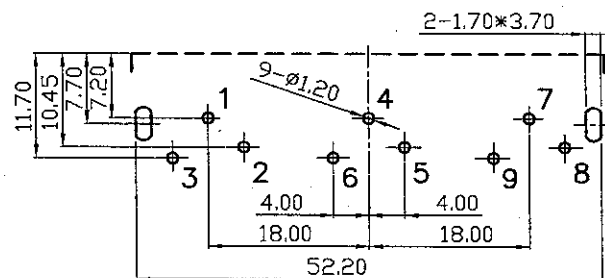
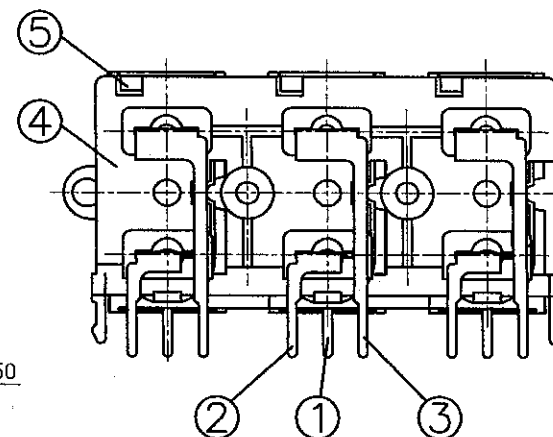
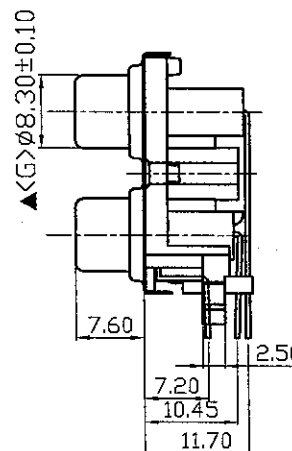


SCHEMATIC			
	L		
			
	C		
			
	R		
			
	WASHER COLOR		

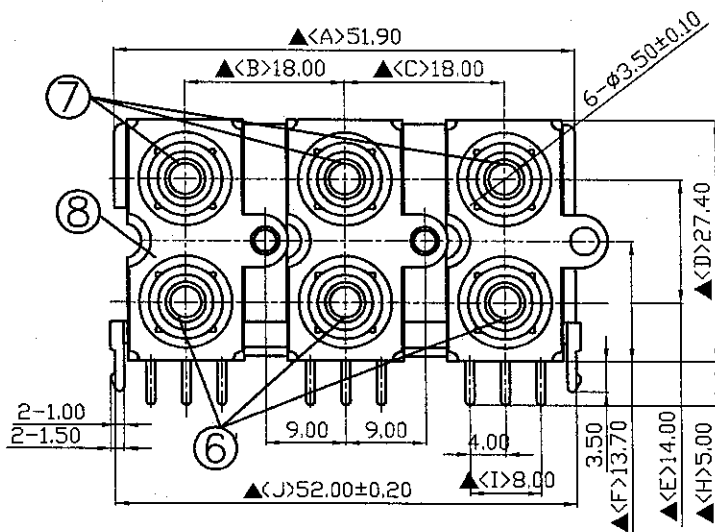

Pin Hole Layout
(Jack Bottom View)

8.	Metal Plate	0.2T Brass	3	Nickel Plated
7.	Washer	PBT	3	White Color
6.	Washer	PBT	3	Red Color
5.	Cover	ABS	3	Black Color
4.	Base	ABS	1	White Color
3.	Terminal T	0.5T Brass	3	Silver Plated
2.	Terminal D	0.5T Brass	3	Silver Plated
1.	Earth Terminal(Barrel)	0.5T Brass	3	Nickel Plated
NO.	Description	Material	Q'TY	Finish

DATE	DWN	CHKD
09.06.2006		

PART NAME : PIN JACK

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



RoHS
Compliant

For Reference
僅供參考

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

SHOGYO INTERNATIONAL CORP.

SCP6823NS323232G