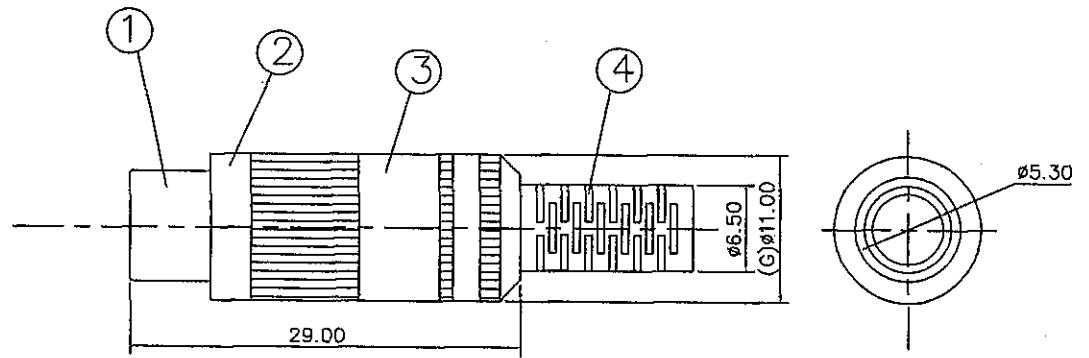


RoHS
Compliant

For Reference
僅供參考

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension

SHOGYO INTERNATIONAL CORP.

SCPJ2019N0NA0SBG

6.	Insulator	PVC	1	White Color
6.	Clomp Terminal	Brass	1	Nickel Plated
5.	Central Pin Terminal	Brass	1	Nickel Plated
4.	Protective Spring	PVC	1	Black color
3.	Metal Housing	Brass	1	Nickel Plated
2.	Barrel Housing	ABS	1	Black Color
1.	Barrel	Brass	1	Nickel Plated
NO.	Description	Material	Q'TY	Finish

DATE	DWN	CHKD
12.22.2005		

PART NAME : PIN JACK

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm

