


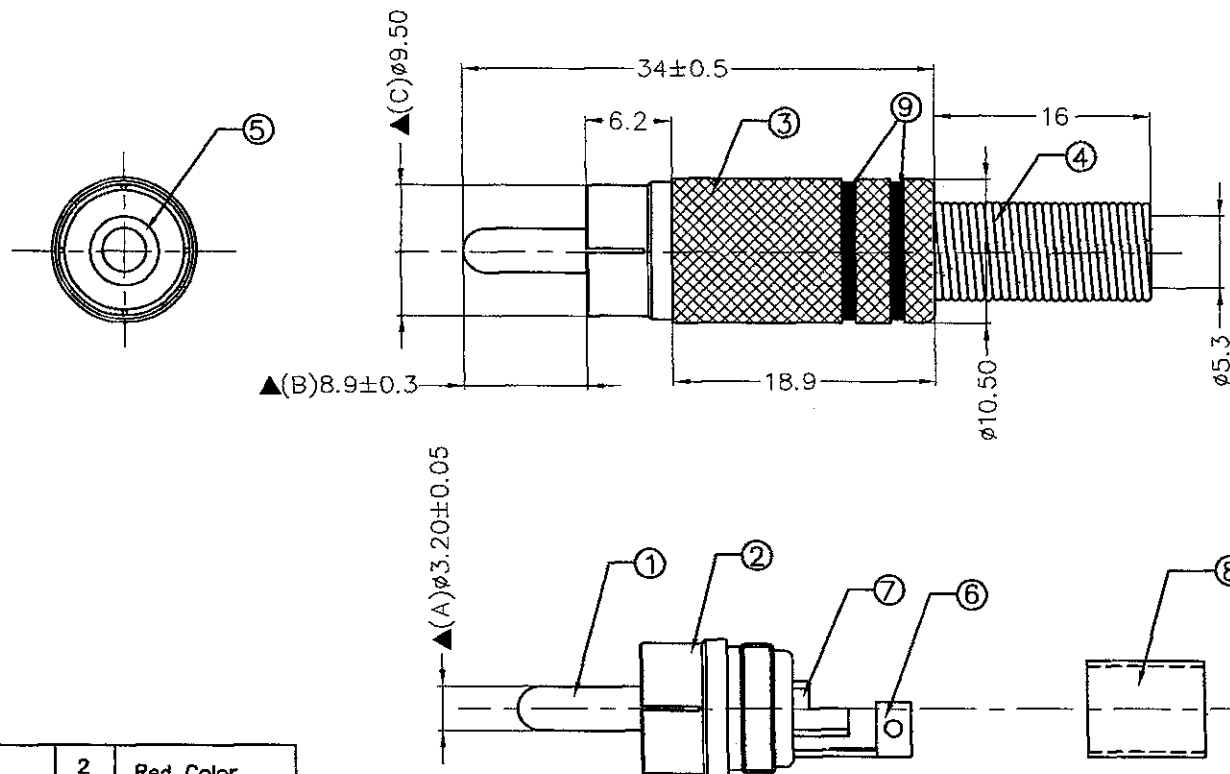

9.	Plastic Ring	PVC	2	Red Color
8.	Insulator B	ABS	1	White Color
7.	Central Pin Terminal	Brass	1	Nickel Plated
6.	Clamp Terminal	Brass	1	Nickel Plated
5.	Insulator A	ABS	1	White Color
4.	Protective Spring	Iron Spring	1	Nickel Plated
3.	Metal Housing	Brass	1	Nickel Plated
2.	Barrel	Brass	1	Nickel Plated
1.	Central Pin	Brass	1	Nickel Plated
NO.	Description	Material	Q'TY	Finish

		DATE	DWN	CHKD
		06.07.2006		
PART NAME : PIN PLUG				
TOLERANCE : X:±0.4 .X:±0.2 .XX:±0.05		UNIT:mm		

SPECIFICATIONS:

Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstand Voltage : AC 500V for one minute
 Remark: ▲: The Most Important Dimension

RoHS
Compliant

For Reference
僅供參考

SHOGYO INTERNATIONAL CORP.

SCPP2024N0NCR00G