

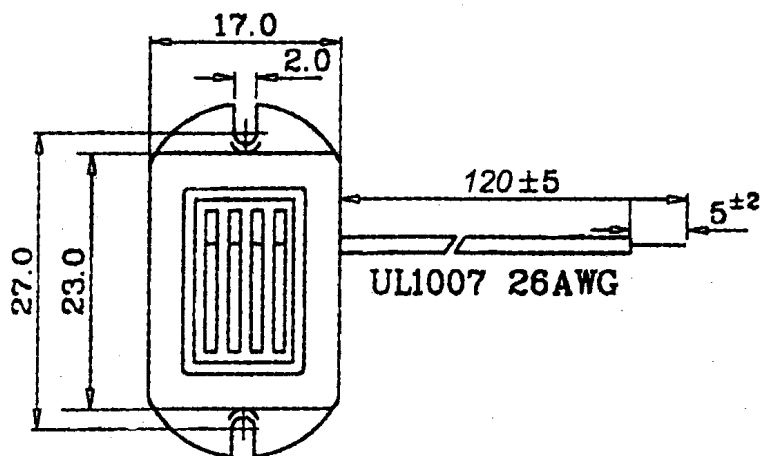


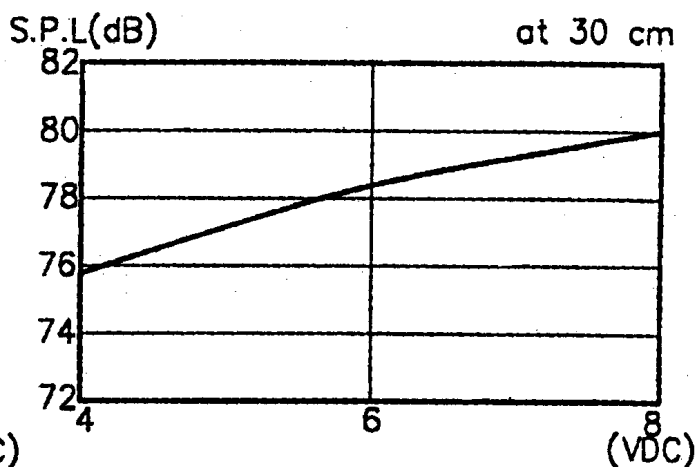

Housing Color : White

Unit: mm

Tolerance: ±0.5mm

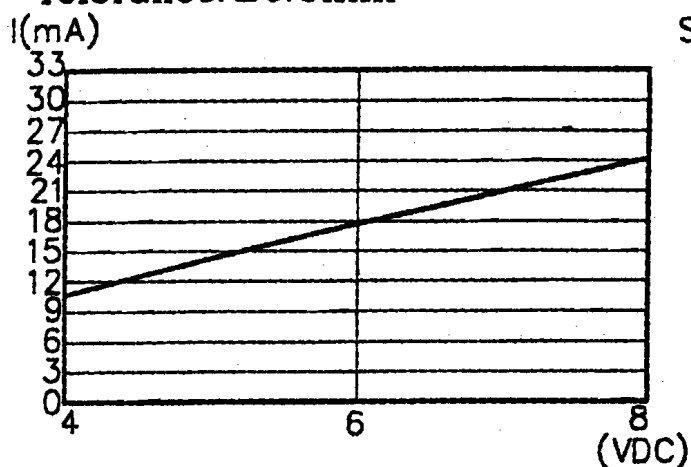

Operating Voltage (VDC)	4~8
Current Consumption at 6VDC(mA,maximum)	45
Sound Pressure Level at 30cm/6VDC (dB,minumum)	75
Tone	Continuous
Operating Temperature (°C)	-20~+60
Storage Temperature (°C)	-30~+70
Weight (Gram)	9.7

TITLE
ELECTRONIC SOLID STATE AUDIO INDICATOR

PART NO. SEM-3606 (RoHS)

APPROVALS

SCALE: 1.5:1

DRAWN David 06' 10/25

UNIT:

CHECKED

EDITION: 2

APPROVED

Signature

SHEET 1 OF 1

MATERIAL ABS UL-94 1/16" HB

SHOGYO

SHOGYO INTERNATIONAL CORP.
6851 JERICHO TURNPIKE, SYOSSET, N.Y. 11791
TEL: (516) 921-9111 • FAX: (516) 921-3777
www.shogyo.com