



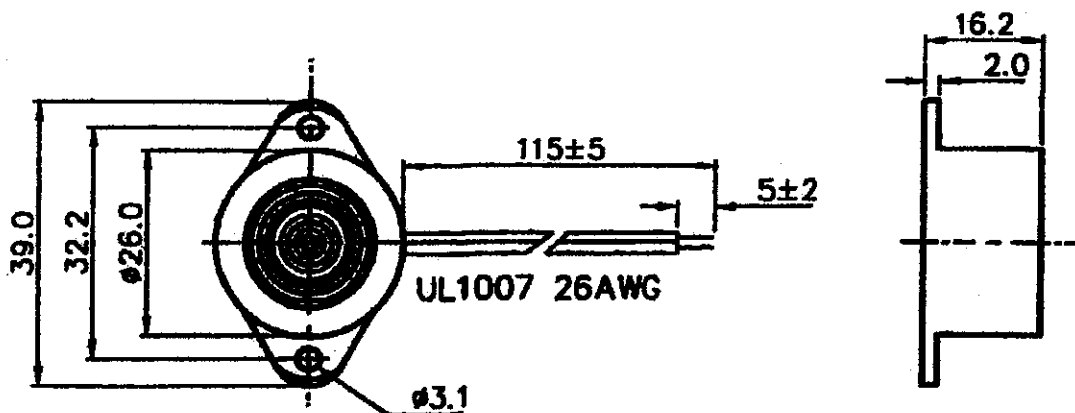


Tolerance: $\pm 0.5\text{mm}$

I(mA)

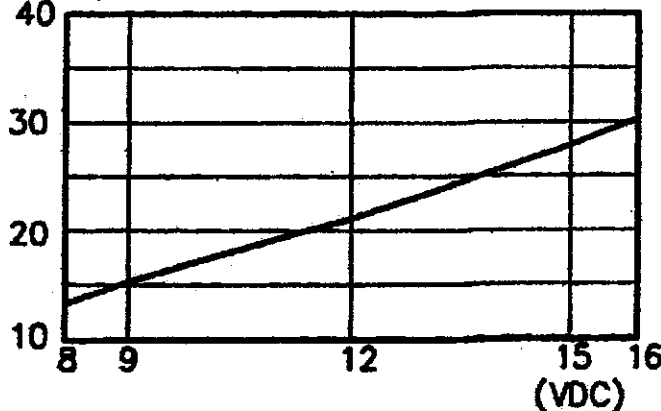

S.P.L(dB)

at 30 cm

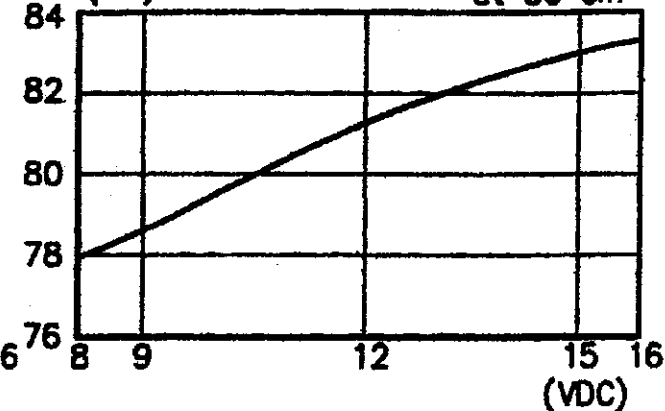

Operating Voltage (VDC)	8~16
Current Consumption at 12VDC(mA,maximum)	50
Sound Pressure Level at 30cm/12VDC (dB,minimum)	79
Tone	Continuous
Operating Temperature (°C)	-20~+60
Storage Temperature (°C)	-30~+70
Weight (Gram)	10.7

TITLE
ELECTRONIC SOLID STATE AUDIO INDICATOR

PART NO. SEM-6612 (RoHS)

APPROVALS

SCALE: 1:1

DWG NO.

DRAWN: John 06/05/22

UNIT: mm

CHECKED: [Signature]

EDITION: 2

MATERIAL

APPROVED: [Signature]

SHEET 1 OF 1

ABS UL-94 1/16" HB

SHOGYO

SHOGYO INTERNATIONAL CORP.
6851 JERICHO TURNPIKE, SYOSSET, N.Y. 11791
TEL: (516) 921-9111 • FAX: (516) 921-3777
www.shogyo.com