









SCHEMATIC	
MODEL NO	C



NUT



WASHER

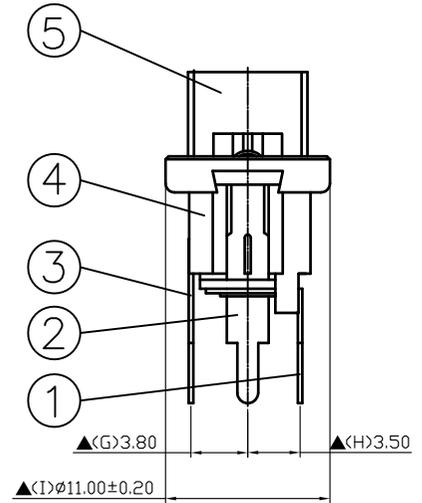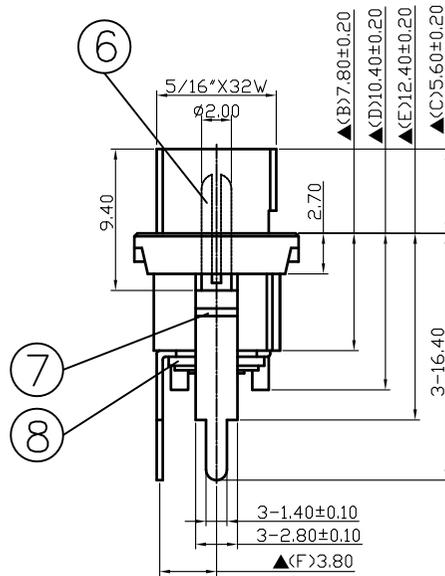

Pin Hole Layout  
(Jack Bottom View)

NO.	Description	Material	Q'TY	Finish
10.	Washer	0.3T Steel	1	Nickel Plated
9.	Nut	Low Lead Brass Rod	1	Nickel Plated
8.	Insulator B	Red Vulcanited Fibre	1	Red Color
7.	Insulator A	Red Vulcanited Fibre	1	Red Color
6.	Pin(2.0φ)	Low Lead Brass Rod	1	Nickel Plated
5.	Bushing	Low Lead Brass Rod	1	Nickel Plated
4.	Housing	PBT+15%	1	Black Color
3.	Break Terminal	0.3T Brass	1	Silver Plated
2.	Sleeve Spring	0.4T Phosphor Bronze	1	Silver Plated
1.	Pin Terminal	0.3T Brass	1	Silver Plated

For Redference  
僅供參考

RoHS&SVHC  
Compliant

DATE	DWN	CHKD	APVD	MANAGER
06.21.2021	王平華			

PART NAME :DC POWER JACK	PART NUMBER: SCD454CCS103B00L	VERSION:3.0
--------------------------	-------------------------------	-------------

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT:mm	SCALE:/
--	---------	---------

SPECIFICATIONS:

Contact Resistance : 30mΩ max  
 Current Rating : Max 5.0A , 24V DC  
 Insulation Resistance: 100MΩ min. at DC 500V  
 Dielectric Withstand Voltage: AC 500V for one minute  
 Remark: ▲: The Most Important Dimension