

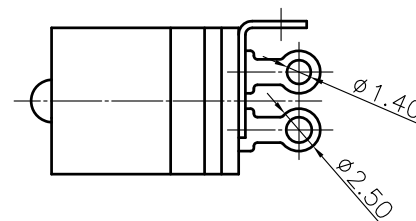
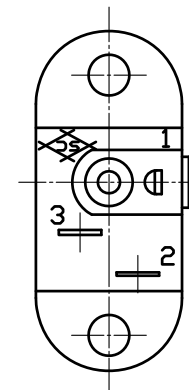
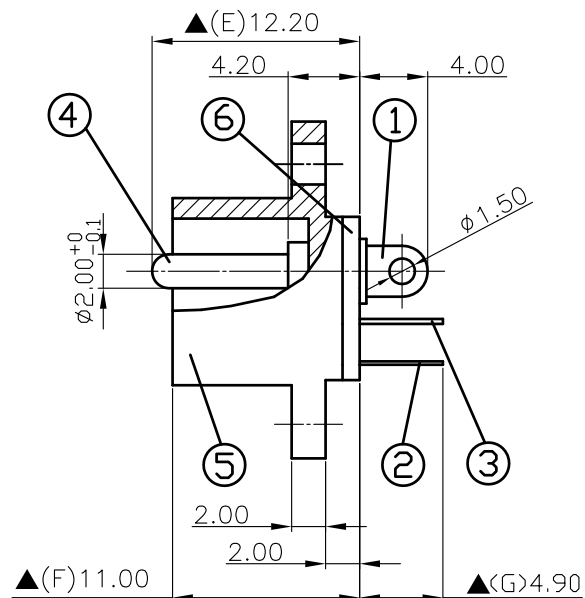


SCHEMATIC	
MODEL NO	C

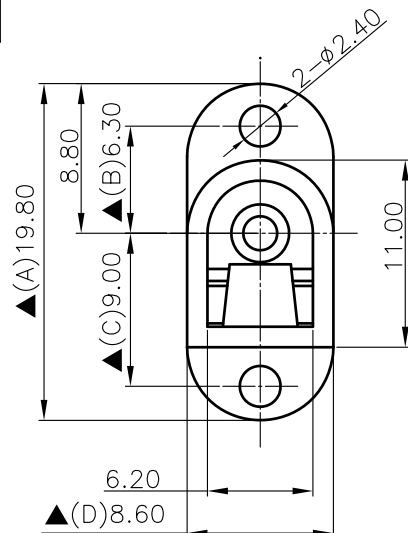

6.	Insulator	1.0T Bakelite	1	Natural
5.	Housing	PBT+15%	1	Black Color
4.	Pin(2.0Ø)	Brass	1	Nickel Plated
3.	Break Terminal	0.3T Brass	1	Silver Plated
2.	Sleeve Spring	0.2T Phosphor Bronze	1	Silver Plated
1.	Pin Terminal	0.4T Brass	1	Silver Plated
NO.	Description	Material	Q"TY	Finish

SHIGYO

DATE	DWN	CHKD	APVD	MANAGER
09.30.2021	王平華			

PART NAME : DC POWER JACK

PART NUMBER: SCD516CCS000B00G

VERSION:8.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Current Rating : Max 5.0A , 24VDC
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant