
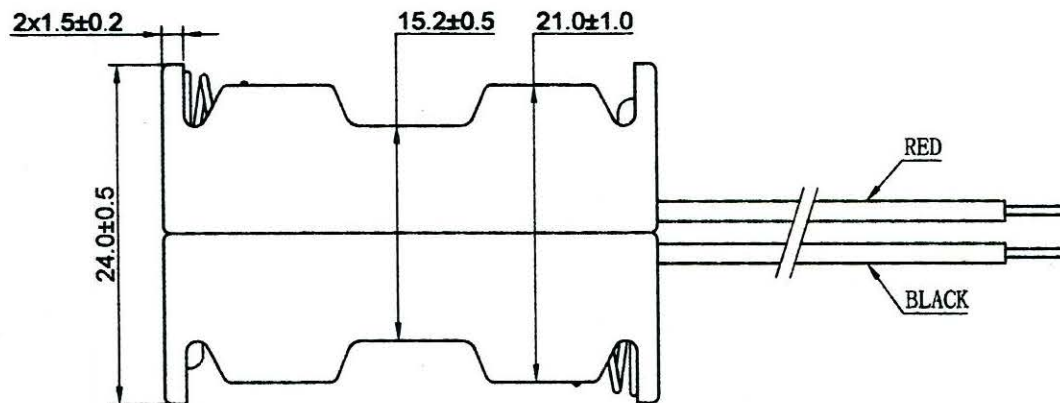
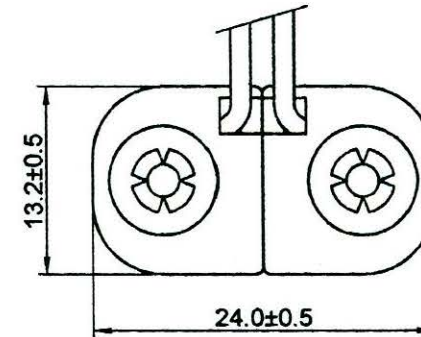


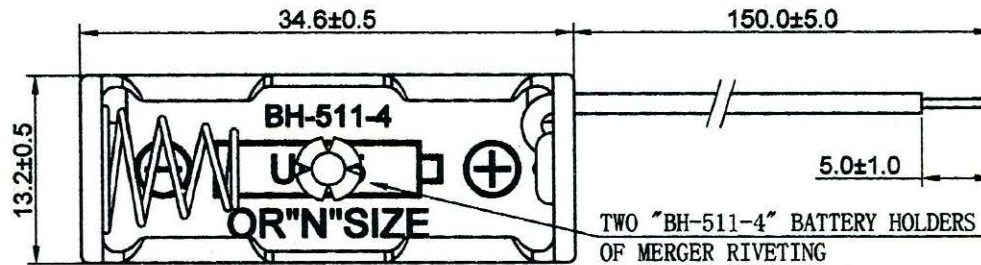

SPECIFICATION

- (1) ITEM NO. : BH-522-4A
- (2) WIRE: UL1007 AWG#26
BLACK & RED: $150\text{MM} \pm 5\text{MM}$
STRIP & TIN: $5\text{MM} \pm 1\text{MM}$
- (3) HOLDER MATERIAL: PP RESIN, BLACK COLOR
- (4) SPRING MATERIAL: $\varnothing 0.5\text{MM}$ SPRING STEEL NICKEL PLATED
- (5) RIVET MATERIAL: BRASS NICKEL PLATED
- (6) RoHS COMPLIANT

3				
2				
1				
NO.	MODIFICATION	DATE	SCALE	2:1
General Tolerances			UNIT	MM
0 ~ >3	± 0.10	30 ~ >120	± 0.30	 The Third Angle Projection
3 ~ >6	± 0.10	120 ~ >400	± 0.50	
6 ~ >30	± 0.20	Angle: $\pm 3^\circ$		
			MAT'L	SEE SPEC.
			DATE	NOV. 28, 2013

SHOGYO INTERNATIONAL CORP.

#BH-522-4A

BATTERY HOLDER