

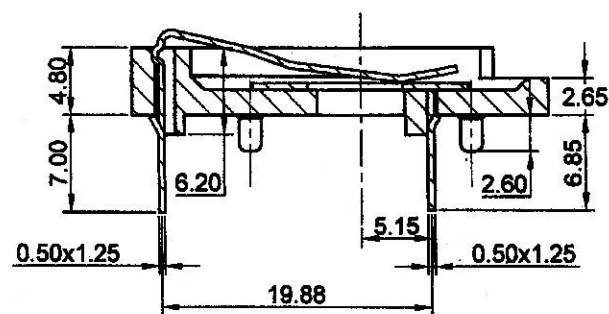


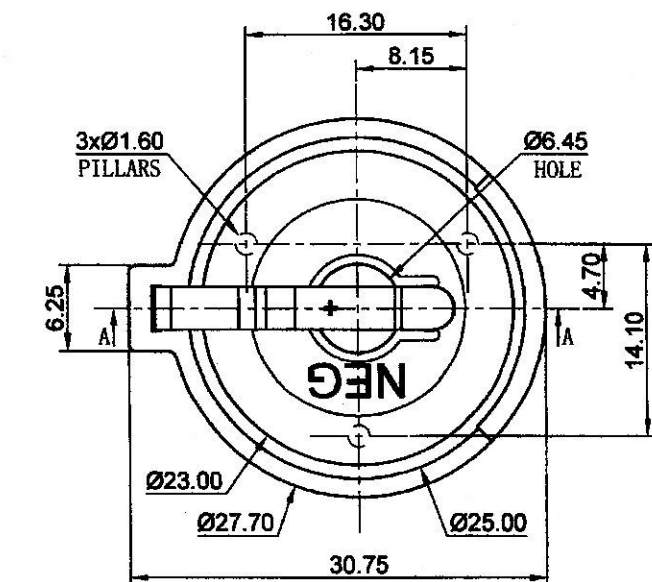

SECTION A-A

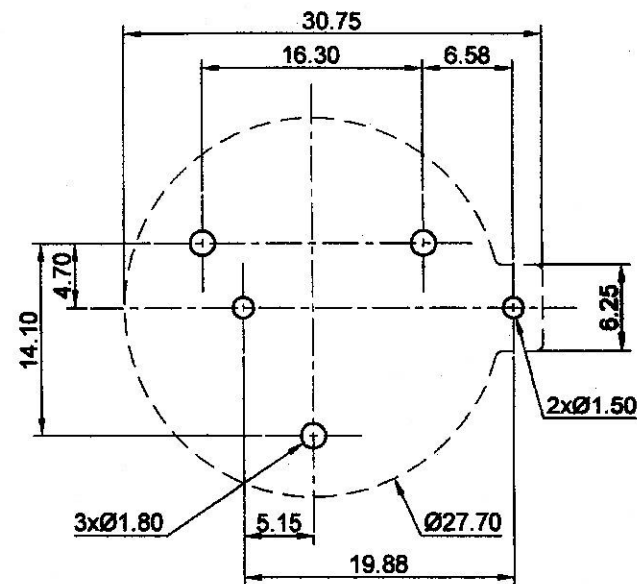

PCB MOUNTING LAYOUT

# SPECIFICATION

- (1) ITEM NO. : CH030-2430LF
- (2) HOUSING MATERIAL: PBT UL94V0, BLACK COLOR
- (3) CONTACT MATERIAL: 0.5MM THICK SPRING STEEL NICKEL PLATED
- (4) CURRENT RATING : 0.5A (AC/DC)
- (5) VOLTAGE RATING : 500V (AC/DC)
- (6) CONTACT RESISTANCE: 30 MILLIOHMS
- (7) INSULATION RESISTANCE: 1000 MEGAOHMS
- (8) TEMPERATURE RANGE: -55° C TO +85° C
- (9) HUMIDITY: 40° C AND 90-95% RH FOR 96 HOURS
- (10) RoHS COMPLIANT

|                                                                                                                      |              |                   |       |                                |       |                                                                                     |  |
|----------------------------------------------------------------------------------------------------------------------|--------------|-------------------|-------|--------------------------------|-------|-------------------------------------------------------------------------------------|--|
| 3                                                                                                                    |              |                   |       |                                |       |                                                                                     |  |
| 2                                                                                                                    |              |                   |       |                                |       |                                                                                     |  |
| 1                                                                                                                    |              |                   |       |                                |       |                                                                                     |  |
| NO.                                                                                                                  | MODIFICATION | DATE              | NAME  | COIN CELL HOLDER: CH030-2430LF |       |                                                                                     |  |
| General Tolerances                                                                                                   |              |                   | SCALE | 2:1                            | APPD  |                                                                                     |  |
| 0 ~ >3                                                                                                               | ± 0.10       | 30 ~ >120 ± 0.30  | UNIT  | MM                             | CHKD  |  |  |
| 3 ~ >6                                                                                                               | ± 0.10       | 120 ~ >400 ± 0.50 | MAT'L | SEE SPEC.                      | DWN   |  |  |
| 6 ~ >30                                                                                                              | ± 0.20       | Angle: ± 3°       | DATE  | NOV. 18. 2013                  | DR NO | CH030-1113                                                                          |  |
| <br>The Third Angle<br>Projection |              |                   |       |                                |       |                                                                                     |  |



SHOGYO INTERNATIONAL CORP.

CH030-2430LF

COIN CELL HOLDER