




SHOGYO INTERNATIONAL CORP.

www.shogyo.com

SPEAKER SPECIFICATIONS

MODEL NO.	GA0506MX (RoHS)				
1	NOMINAL SIZE	50 mm	2 inch		
2	IMPEDANCE	8 $\Omega \pm 15\%$	at. 800 Hz	1 V	
3	RESONANCE FO	500 Hz ± 100 Hz	FO Hz	1 V	
4	S.P.L. LEVEL	79 dB/w ± 3 dB	0.25 W 50 cm average at 1K, 1.4K, 1.7K, 2K Hz		
5	FREQ. RESPONSE	Fo Hz $\sim 10K$ Hz MAX 10 dB			
6	INPUT POWER	Rated power 0.25 W	Handling Capacity	0.5 W	
7	OPERATION	Must be normal at program source 0.25 W			
8	BUZZ, RATTLE, ETC.	Must be normal at Sine Wave 1.41 V			
9	MAGNET	13 x 10 mm			
10	FLUX DENSITY	Gauss $\pm 10\%$ total flux max well within			
11	DISTORTION				
12	LOAD TEST	After test meet Item 7 and 8	White noise	0.25 W 5 Hours	
13	OPERATION TEMP.				
14	HEAT TEST	After test meet Item 7 and 8	70 $\pm 2^\circ$ C	20-50 % R.H.	5 Hours
15	HUMIDITY TEST	After test meet Item 7 and 8	40 $\pm 2^\circ$ C	90-95 % R.H.	5 Hours

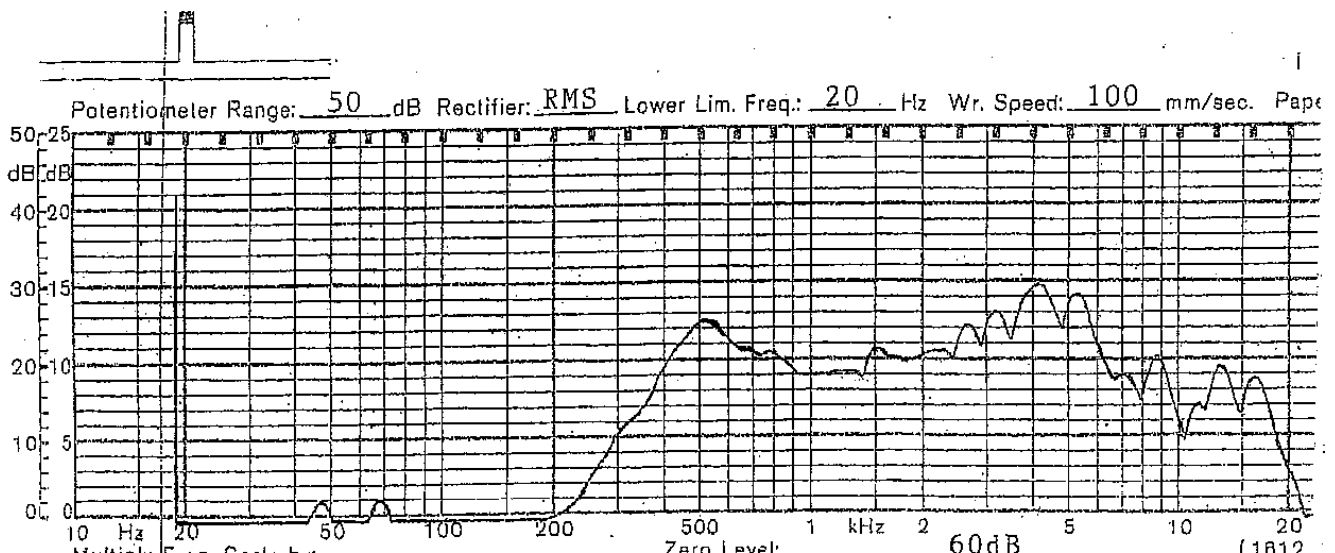

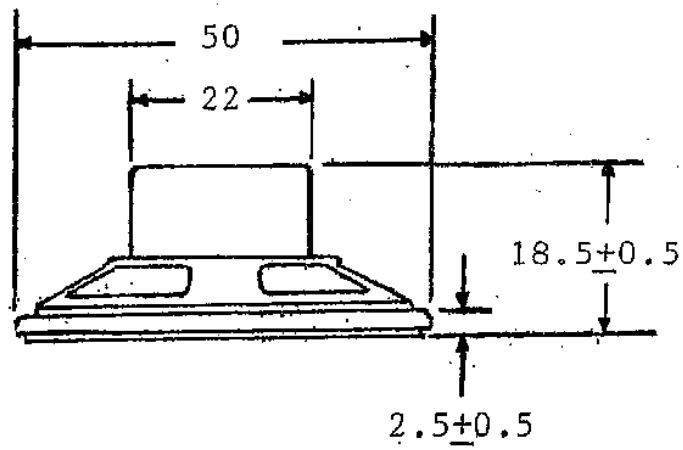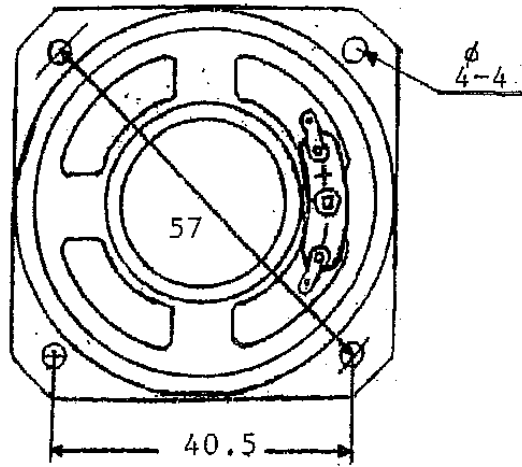

TOLERANCE: $\pm 0.5\text{MM}$

MODEL NO. GA0506MX

APPROVED	CHECKED	DRAWING

SHOGYO INTERNATIONAL CORP.