




SHOGYO INTERNATIONAL CORP.

www.shogyo.com

SPEAKER SPECIFICATIONS

MODEL NO.	GA0771BX (RoHS)				
1	NOMINAL SIZE	77 mm	3	inch	
2	IMPEDANCE	8 $\Omega \pm 15\%$	at. 800 Hz	1 V	
3	RESONANCE FO	240 Hz ± 48 Hz	FO Hz	1 V	
4	S.P. LEVEL	92 dB/w ± 3 dB	1 W	50 cm average at	
5	FREQ. RESPONSE	Fo Hz $\sim 20K$ Hz	700, 900, 1.2K, 1.4K Hz		
6	INPUT POWER	Nominal Input 3 W	Handling Capacity 4 W		
7	OPERATION	Must be normal at program source 3 W			
8	BUZZ, RATTLE, ETC.	Must be normal at Sine Wave 4.9 V			
9	MAGNET	13 x 10 mm			
10	FLUX DENSITY	Gauss $\pm 10\%$ total flux max well within			
11	TOTAL WEIGHT	gr oz			
12	LOAD TEST	After test meets Item 7 and 8 White noise 3 W 24 Hours			
13	DISTORTION				
14	HEAT TEST	After test meets Item 7 and 8 60 $\pm 2^\circ$ C 20-50 % R.H. 24 Hours			
15	HUMIDITY TEST	After test meet Item 7 and 8 40 $\pm 2^\circ$ C 90-95 % R.H. 24 Hours			

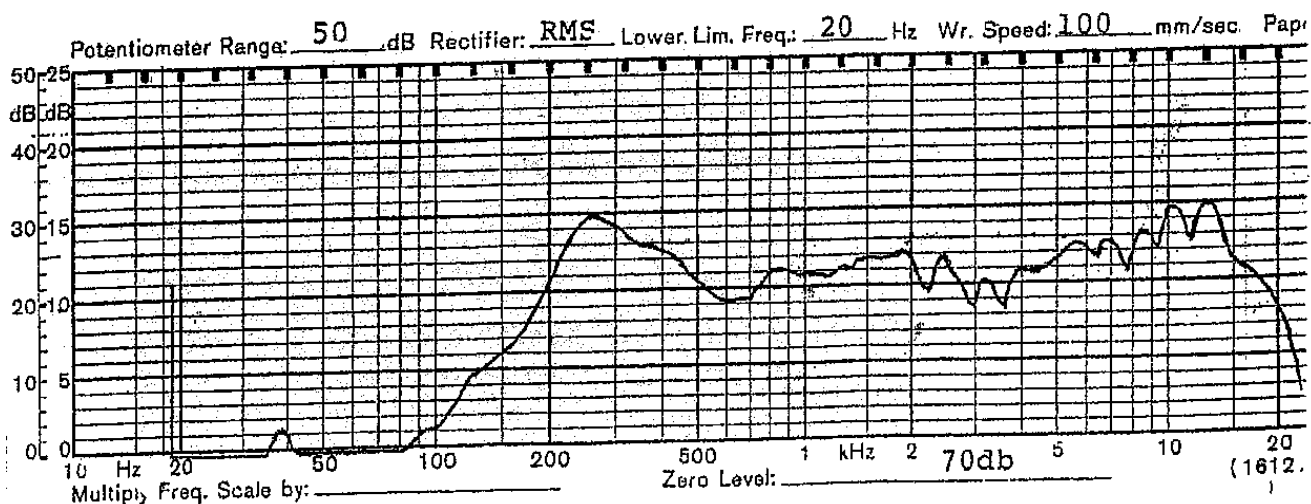

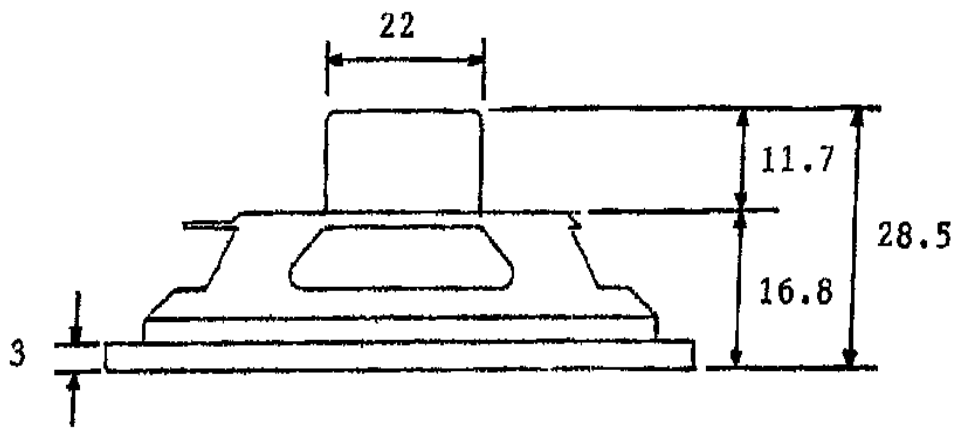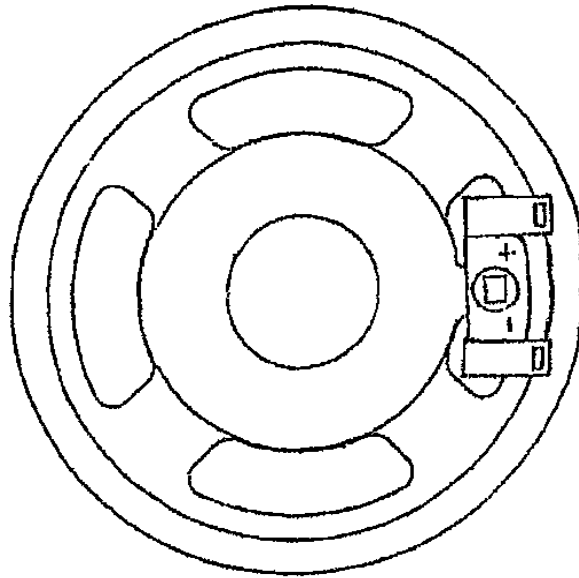

TOLERANCE: ± 0.8 MM

MODEL NO. GA0771BX

APPROVED	CHECKED	DRAWING

SHOGYO INTERNATIONAL CORP.