




SHOGYO INTERNATIONAL CORP.

www.shogyo.com

SPEAKER SPECIFICATIONS

MODEL NO.	GA1259X (RoHS)				
1	NOMINAL SIZE	77 x 125 mm	3 x 5	inch	
2	IMPEDANCE	8 $\Omega \pm 15\%$	at. 800 Hz	1 V	
3	RESONANCE FO	180 Hz ± 36 Hz	FO Hz	1 V	
4	S.P. LEVEL	86 dB/w ± 3 dB	1 W	50 cm average	at
5	FREQ. RESPONSE	Fo Hz $\sim 17K$ Hz	MAX 10 dB	1K, 1.4K, 1.7K, 2K Hz	
6	INPUT POWER	Nominal Input 3 W	Handling Capacity	5 W	
7	OPERATION	Must be normal at program source 3 W			
8	BUZZ, RATTLE, ETC.	Must be normal at Sine Wave 4.89 V			
9	MAGNET	14 x 15 mm			
10	FLUX DENSITY	Gauss $\pm 10\%$ total flux max well within			
11	TOTAL WEIGHT	gr oz			
12	LOAD TEST	After test meets Item 7 and 8	White noise	3 W	24 Hours
13	DISTORTION				
14	HEAT TEST	After test meets Item 7 and 8	60 $\pm 2^\circ$ C	20-50 % R.H.	24 Hours
15	HUMIDITY TEST	After test meet Item 7 and 8	40 $\pm 2^\circ$ C	90-95 % R.H.	24 Hours

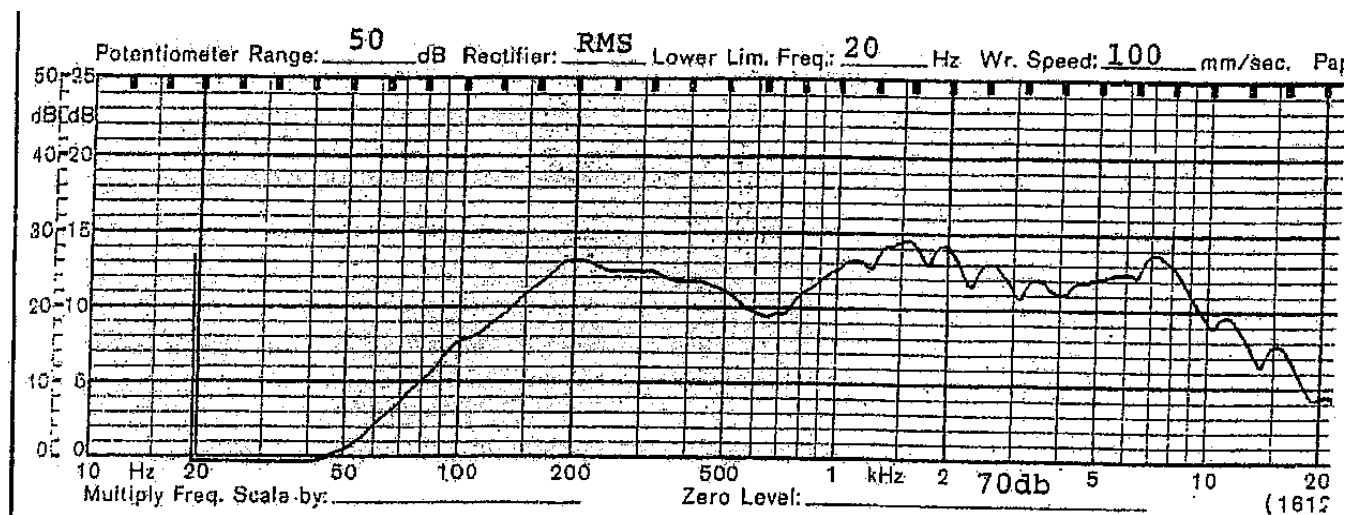

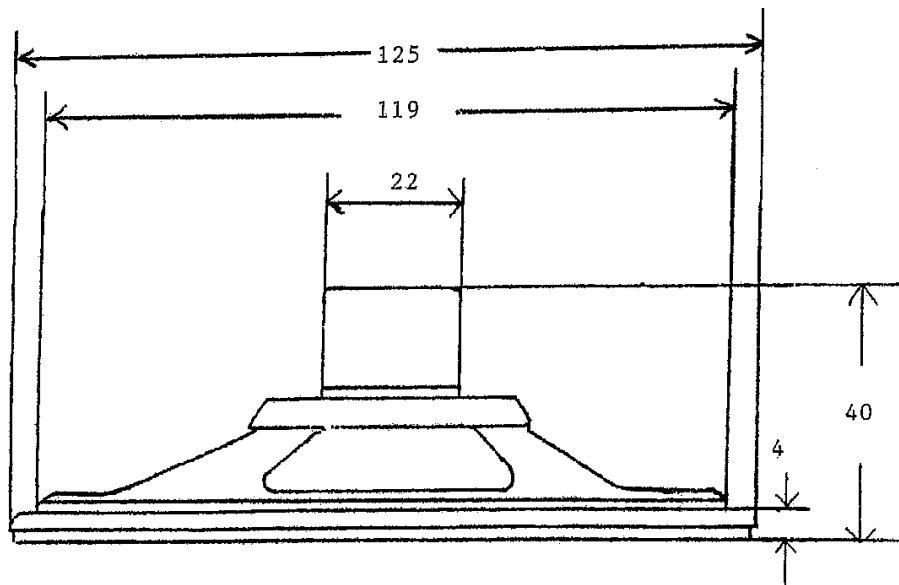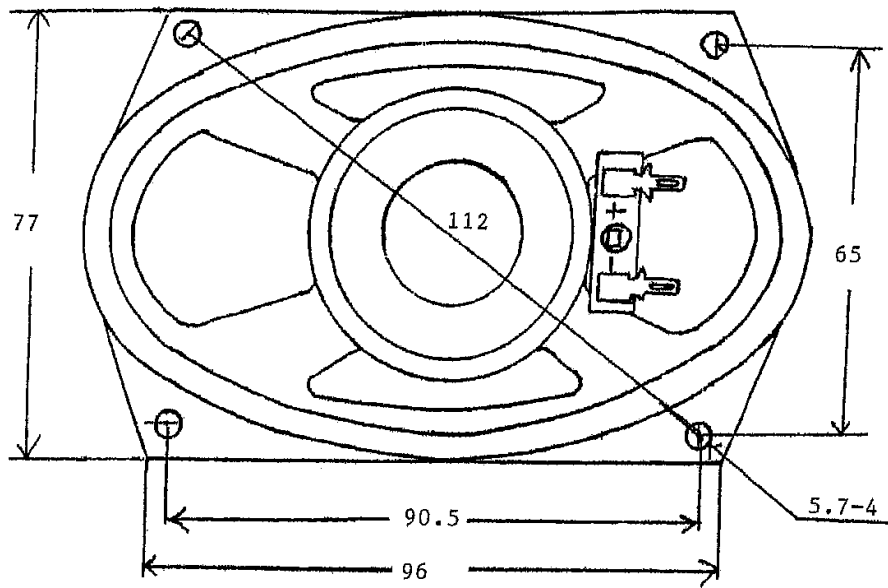

TOLERANCE: ± 0.8 MM

MODEL NO.

GA1259X

APPROVED

CHECKED

DRAWING

SHOGYO INTERNATIONAL CORP.