




SHOGYO INTERNATIONAL CORP.

www.shogyo.com

SPEAKER SPECIFICATIONS

MODEL NO.		GC0261MAEX (RoHS)				
1	NOMINAL SIZE	26 mm inch				
2	IMPEDANCE	8 Ω ± 15% at. 1K Hz 1 V				
3	RESONANCE FO	540 Hz ± 108 Hz FO Hz 1 V				
4	S.P. LEVEL	88 dB/w ± 3 dB	1 W 50 cm average at 600, 800, 1K, 1.2K Hz			
5	FREQ. RESPONSE	Fo Hz ~ 6K Hz				
6	INPUT POWER	Nominal Input 0.5 W Handling Capacity 1 W				
7	OPERATION	Must be normal at program source 0.5 W				
8	BUZZ, RATTLE, ETC.	Must be normal at Sine Wave 2 V				
9	MAGNET	9.5 x 1.5 mm				
10	FLUX DENSITY	Gauss ± 10% total flux max well within				
11	TOTAL WEIGHT	gr oz				
12	LOAD TEST	After test meets Item 7 and 8	White noise 0.5 W 24 Hours			
13	DISTORTION					
14	HEAT TEST	After test meets Item 7 and 8	60 ± 2° C 20-50 % R.H. 24 Hours			
15	HUMIDITY TEST	After test meet Item 7 and 8	40 ± 2° C 90-95 % R.H. 24 Hours			

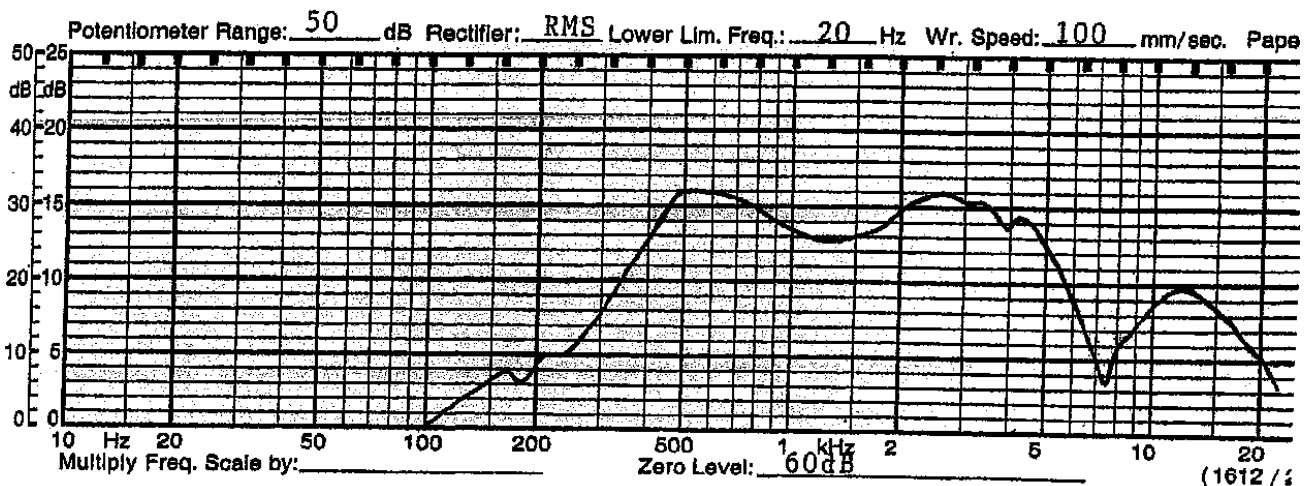

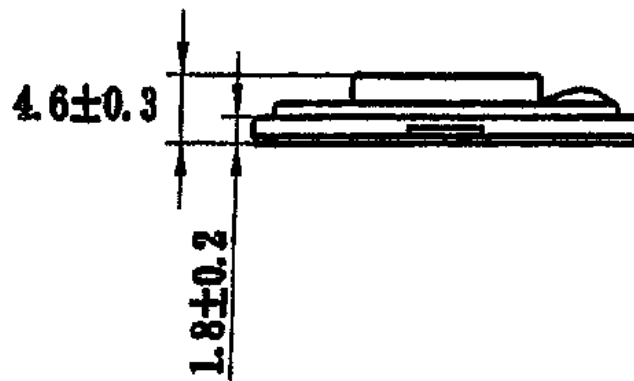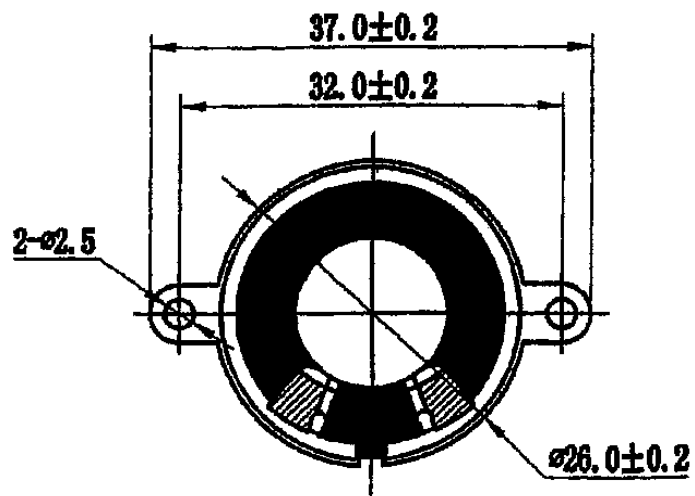

MODEL NO. GC0261MAEX

APPROVED	CHECKED	DRAWING