




SHOGYO INTERNATIONAL CORP.

www.shogyo.com

SPEAKER SPECIFICATIONS

MODEL NO.	GC0282MAX (RoHS)				
1	NOMINAL SIZE	28 mm	inch		
2	IMPEDANCE	8 $\Omega \pm 15\%$	at. 1.5K Hz	1 V	
3	RESONANCE FO	550 Hz ± 110 Hz	FO Hz	1 V	
4	S.P. LEVEL	85 dB/w ± 3 dB	0.5 W	50 cm average	at
5	FREQ. RESPONSE	Fo Hz $\sim 10K$ Hz	MAX 10 dB	800, 1K, 1.2K, 1.5K Hz	
6	INPUT POWER	Nominal Input 0.5 W	Handling Capacity	1 W	
7	OPERATION	Must be normal at program source 0.5 W			
8	BUZZ, RATTLE, ETC.	Must be normal at Sine Wave 2 V			
9	MAGNET	9.5 x 1.5 mm			
10	FLUX DENSITY	Gauss $\pm 10\%$ total flux max well within			
11	TOTAL WEIGHT	gr oz			
12	LOAD TEST	After test meets Item 7 and 8	White noise	0.5 W	24 Hours
13	DISTORTION				
14	HEAT TEST	After test meets Item 7 and 8	65 $\pm 2^\circ$ C	20-50 % R.H.	24 Hours
15	HUMIDITY TEST	After test meet Item 7 and 8	40 $\pm 2^\circ$ C	90-95 % R.H.	24 Hours

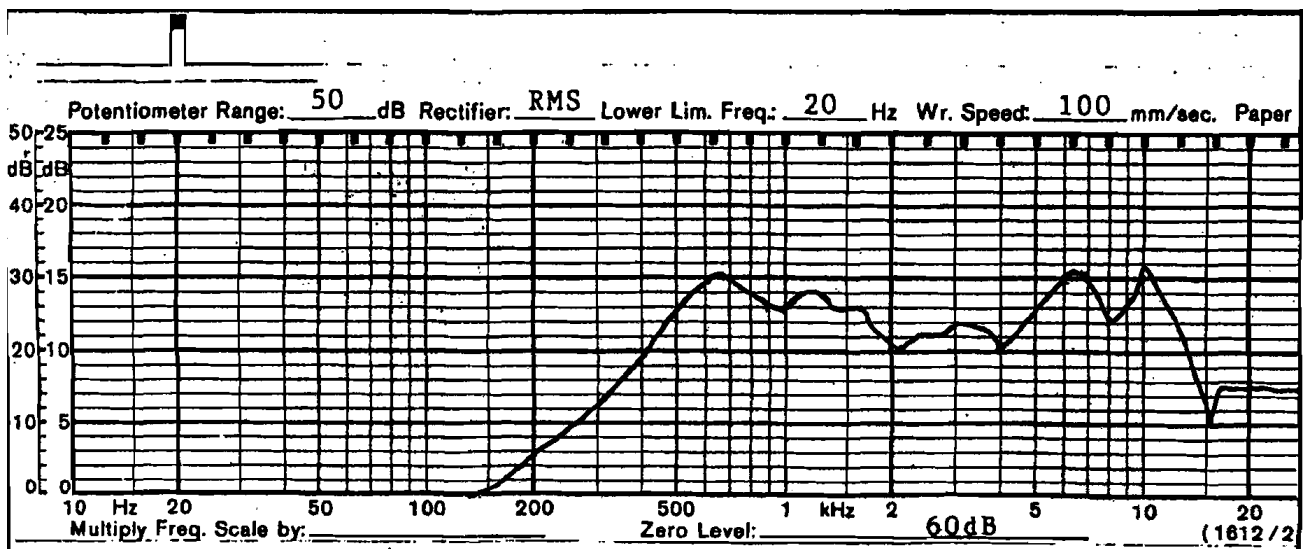

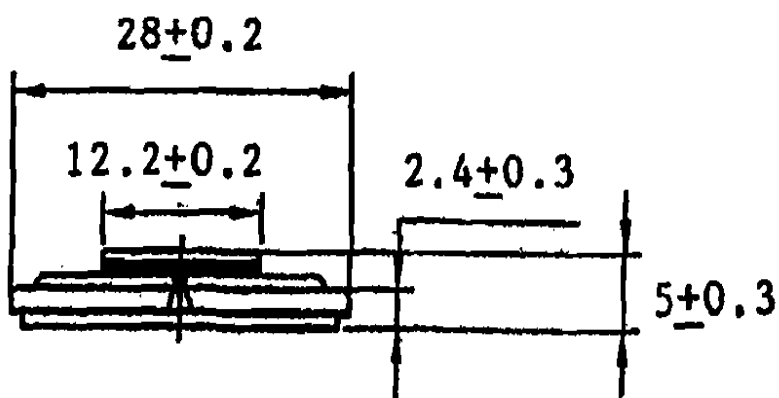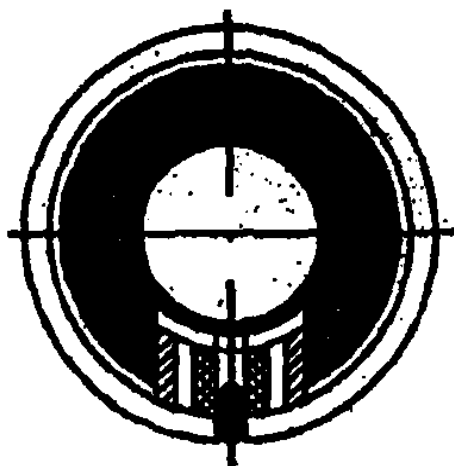

MODEL NO. GC0282MAX		
APPROVED	CHECKED	DRAWING