




SHOGYO INTERNATIONAL CORP.

www.shogyo.com

SPEAKER SPECIFICATIONS

MODEL NO.	GC0401PX (RoHS)				
1	NOMINAL SIZE	40 mm	1-1/2	inch	
2	IMPEDANCE	8 $\Omega \pm 15\%$	at. 800	Hz	1 V
3	RESONANCE FO	580 Hz ± 116 Hz	FO	Hz	1 V
4	S.P. LEVEL	82 dB/w ± 3 dB	0.2	W	50 cm average
5	FREQ. RESPONSE	Fo Hz $\sim 6K$ Hz	at 1K, 1.4K, 1.7K, 2K	Hz	
6	INPUT POWER	Nominal Input 0.2 W	Handling Capacity	0.5 W	
7	OPERATION	Must be normal at program source 0.2 W			
8	BUZZ, RATTLE, ETC.	Must be normal at Sine Wave 1.26 V			
9	MAGNET	12.5 x 1.5 mm			
10	FLUX DENSITY	Gauss $\pm 10\%$	total flux max well within		
11	TOTAL WEIGHT	gr	oz		
12	LOAD TEST	After test meets Item 7 and 8	White noise	0.2 W	24 Hours
13	DISTORTION				
14	HEAT TEST	After test meets Item 7 and 8	60 $\pm 2^\circ$ C	20-50 % R.H.	24 Hours
15	HUMIDITY TEST	After test meet Item 7 and 8	40 $\pm 2^\circ$ C	90-95 % R.H.	24 Hours

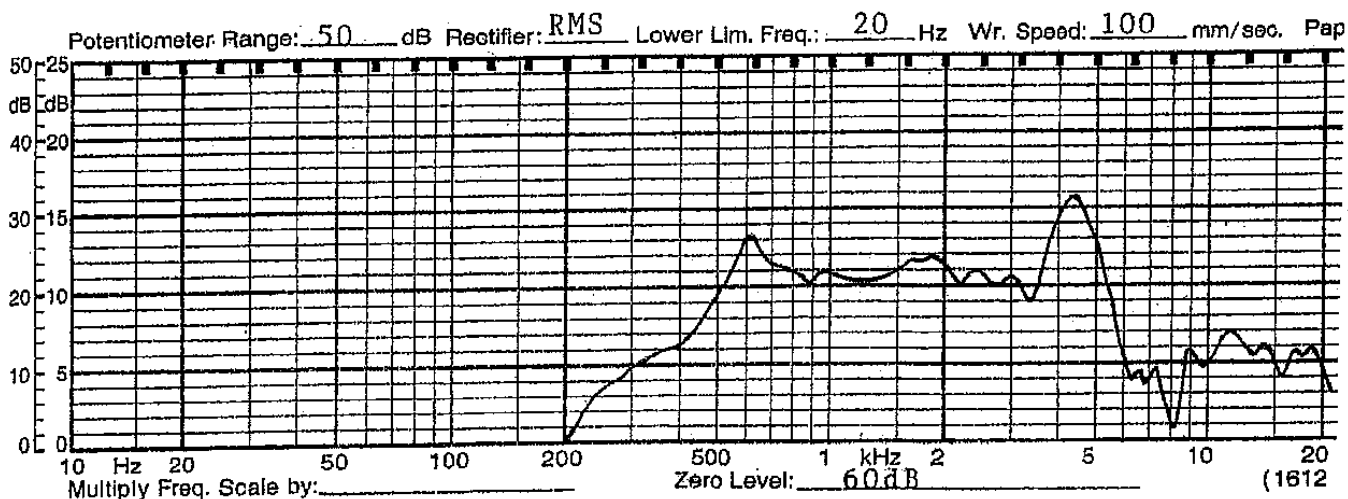

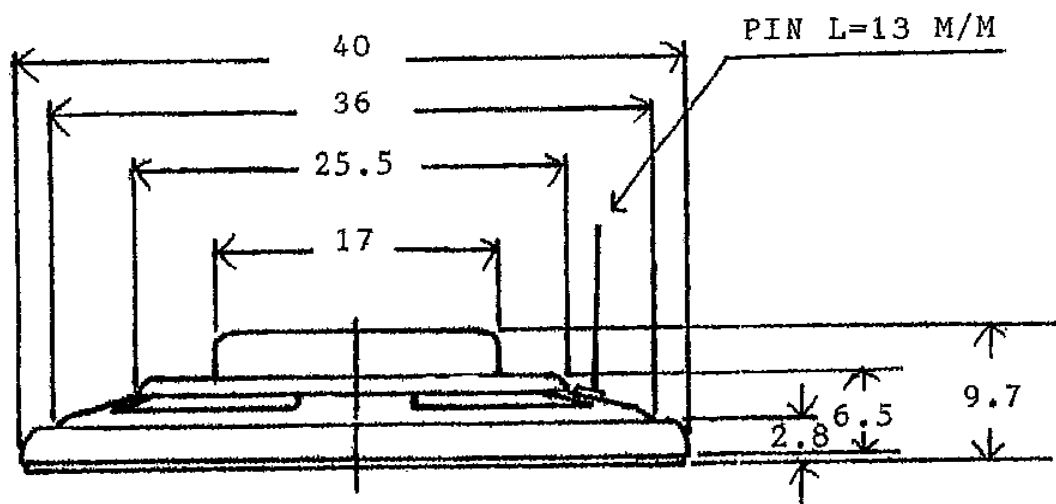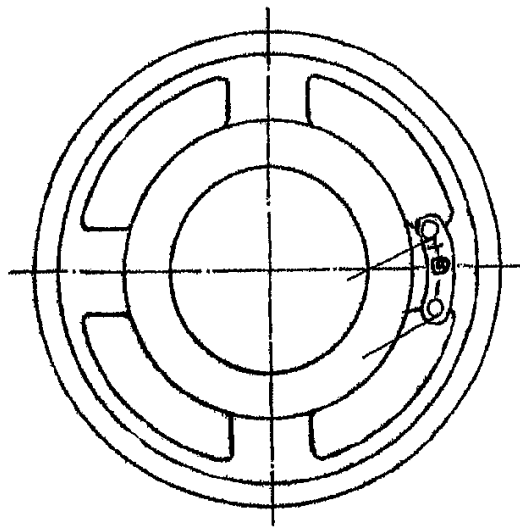

TOLERANCE: ± 0.5 MM

MODEL NO. GC0401PX

APPROVED	CHECKED	DRAWING

SHOGYO INTERNATIONAL CORP.