




SHOGYO INTERNATIONAL CORP.

www.shogyo.com

SPEAKER SPECIFICATIONS

MODEL NO.	GF0571MX (RoHS)				
1	NOMINAL SIZE	57 mm	2-1/4	inch	
2	IMPEDANCE	8 $\Omega \pm 15\%$	at. 800	Hz	1 V
3	RESONANCE FO	480 Hz $\pm$ 96 Hz	FO	Hz	1 V
4	OUTPUT S.P.L.	86 dB $\pm$ 3 dB	0.25 W	50 cm	average at
5	FREQ. RESPONSE	Fo Hz ~14K Hz	1K, 1.4K, 1.7K, 2K	Hz	
6	INPUT POWER	Rated power 0.25 W	Max power 0.5 W		
7	OPERATION	Must be normal at program source	0.25 W		
8	BUZZ, RATTLE, ETC.	Must be normal at Sine Wave	1.41 V		
9	MAGNET	32 x 18 x 6 mm			
10	FLUX DENSITY	Gauss $\pm$ 10%	total flux max well within		
11	DISTORTION				
12	LOAD TEST	After test meet Item 7 and 8	White noise 0.25 W	24 Hours	
13	OPERATION TEMP.				
14	HEAT TEST	After test meet Item 7 and 8	60 $\pm$ 2° C	20-50 % R.H.	24 Hours
15	HUMIDITY TEST	After test meet Item 7 and 8	40 $\pm$ 2° C	90-95 % R.H.	24 Hours

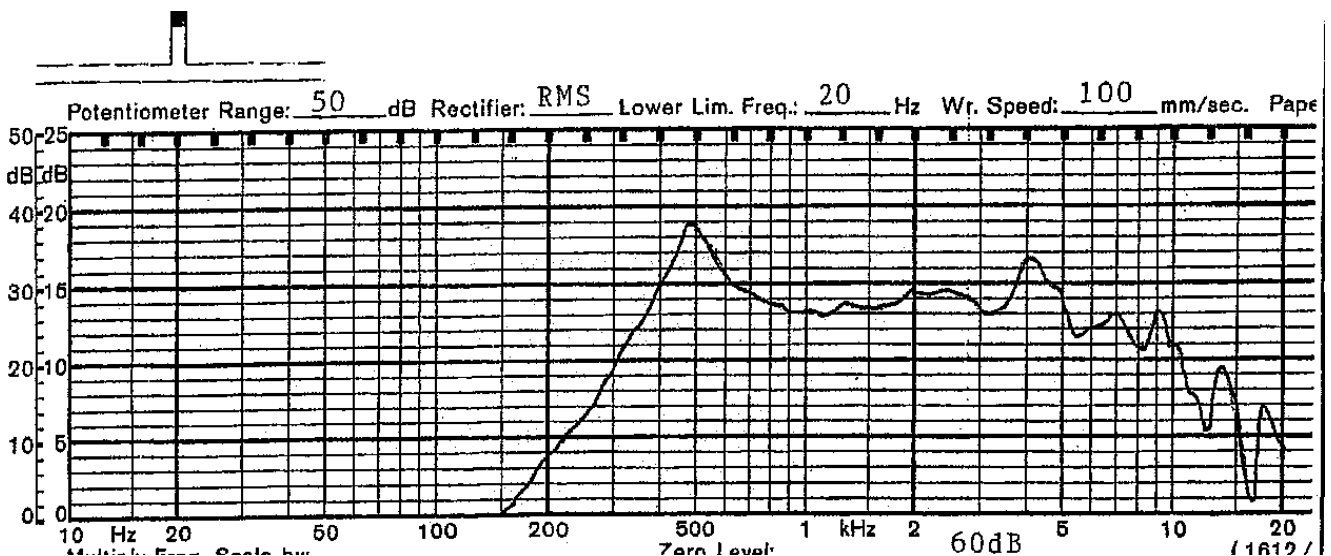

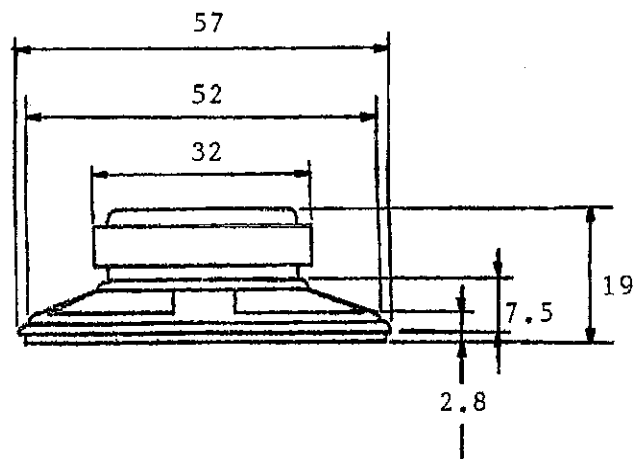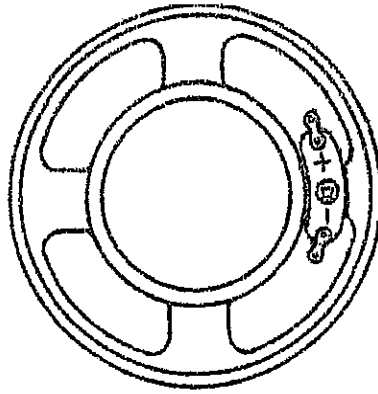

TOLERANCE: +/- 0.8 MM

MODEL NO.
GF0571MX

APPROVED	CHECKED	DRAWING

SHOGYO INTERNATIONAL CORP.