




SHOGYO INTERNATIONAL CORP.

www.shogyo.com

SPEAKER SPECIFICATIONS

MODEL NO.	GF1006EX (RoHS)				
1	NOMINAL SIZE	100 mm	4	inch	
2	IMPEDANCE	8 $\Omega \pm 15\%$	at. 1K Hz	1 V	
3	RESONANCE FO	Hz $\pm$ Hz	FO Hz	1 V	
4	S.P. LEVEL	99 dB/w $\pm$ 2 dB	1 W	50 cm average at	
5	FREQ. RESPONSE	Fo Hz $\sim$ 12K Hz MAX 10 dB	1K, 1.5K, 2K, 3K Hz		
6	INPUT POWER	Nominal Input 20 W	Handling Capacity 30 W		
7	OPERATION	Must be normal at program source 20 W			
8	BUZZ, RATTLE, ETC.	Must be normal at Sine Wave 4.9 V			
9	MAGNET	70 x 32 x 10 mm			
10	FLUX DENSITY	Gauss $\pm$ 10% total flux max well within			
11	TOTAL WEIGHT	gr oz			
12	LOAD TEST	After test meets Item 7 and 8	White noise 20 W 24 Hours		
13	DISTORTION				
14	HEAT TEST	After test meets Item 7 and 8	60 $\pm$ 2° C 20-50 % R.H. 24 Hours		
15	HUMIDITY TEST	After test meet Item 7 and 8	40 $\pm$ 2° C 90-95 % R.H. 24 Hours		

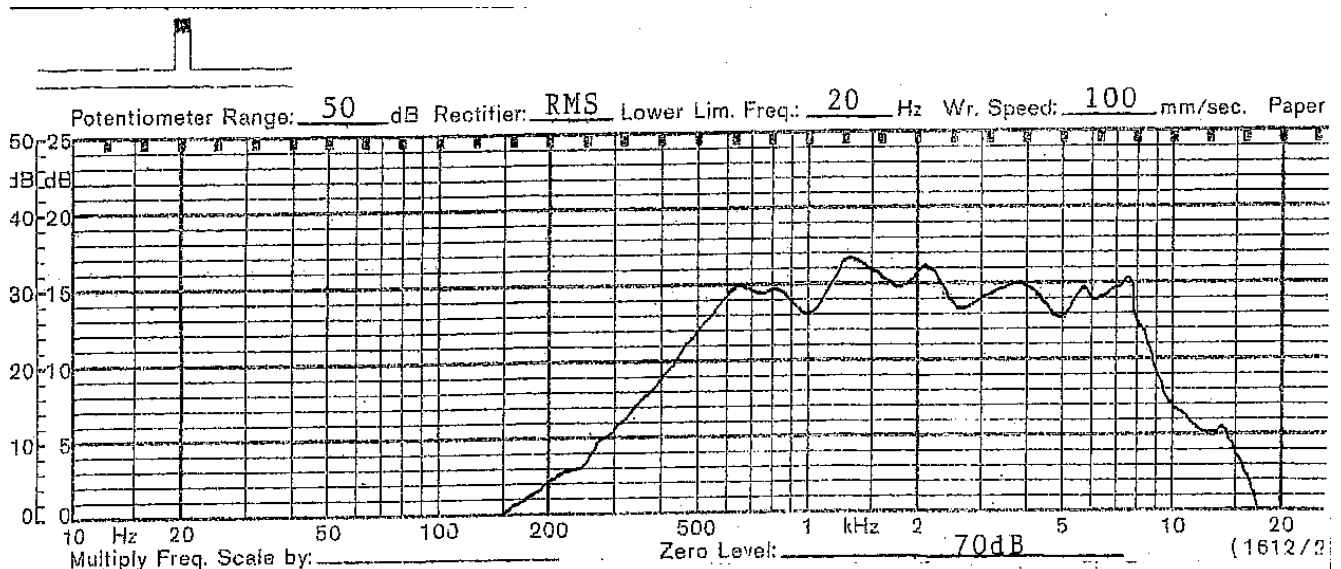

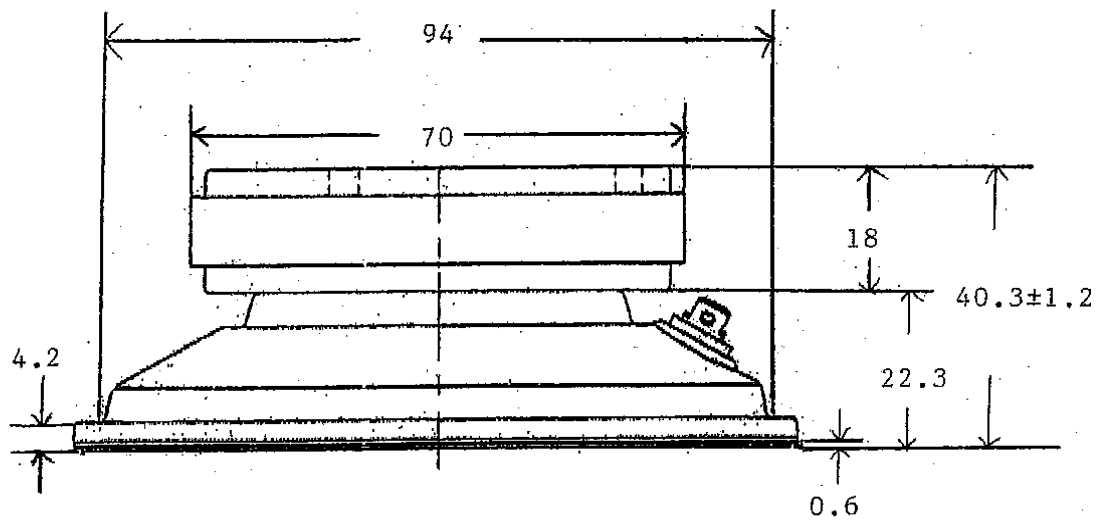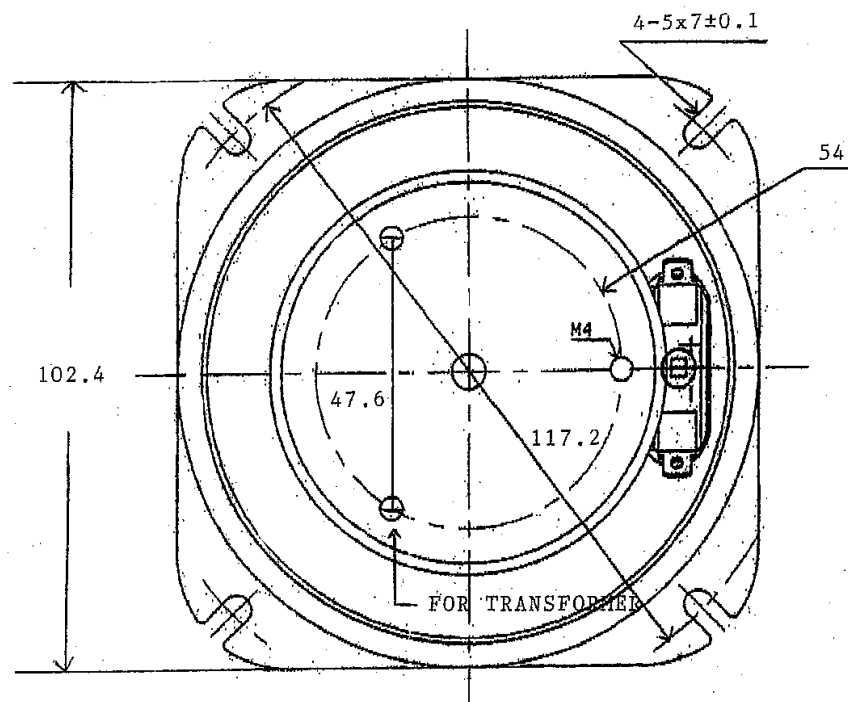

MODEL NO. GF1006EX

APPROVED	CHECKED	DRAWING

SHOGYO INTERNATIONAL CORP.