




SHOGYO INTERNATIONAL CORP.

www.shogyo.com

SPEAKER SPECIFICATIONS

MODEL NO.	GF1202X (RoHS)				
1	NOMINAL SIZE	120 mm	5	inch	
2	IMPEDANCE	8 $\Omega \pm 15\%$	at. 600 Hz	1 V	
3	RESONANCE FO	135 Hz ± 27 Hz	FO Hz	1 V	
4	S.P. LEVEL	92 dB/w ± 3 dB	1 W	50 cm average at	
5	FREQ. RESPONSE	Fo Hz $\sim 17K$ Hz MAX 10 dB	300, 400, 500, 600 Hz		
6	INPUT POWER	Nominal Input 6 W	Handling Capacity 10 W		
7	OPERATION	Must be normal at program source 6 W			
8	BUZZ, RATTLE, ETC.	Must be normal at Sine Wave 6.9 V			
9	MAGNET	60 x 32 x 8 mm			
10	FLUX DENSITY	Gauss $\pm 10\%$ total flux max well within			
11	TOTAL WEIGHT	gr oz			
12	LOAD TEST	After test meets Item 7 and 8	White noise 6 W 24 Hours		
13	DISTORTION				
14	HEAT TEST	After test meets Item 7 and 8	70 $\pm 2^\circ$ C 20-50 % R.H. 24 Hours		
15	HUMIDITY TEST	After test meet Item 7 and 8	40 $\pm 2^\circ$ C 90-95 % R.H. 24 Hours		

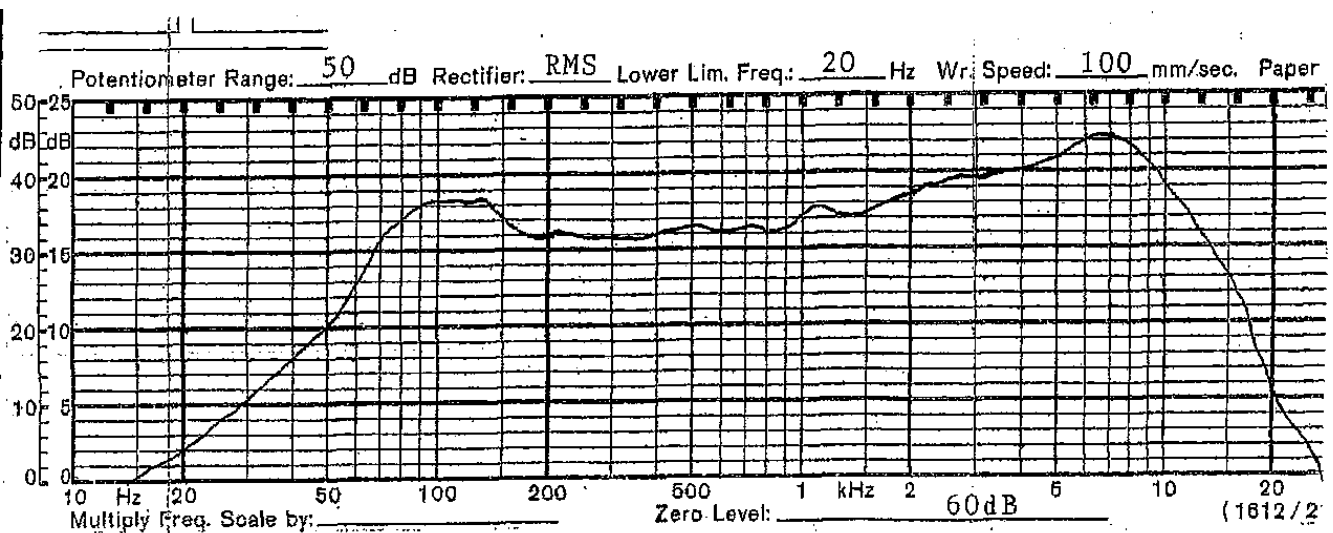

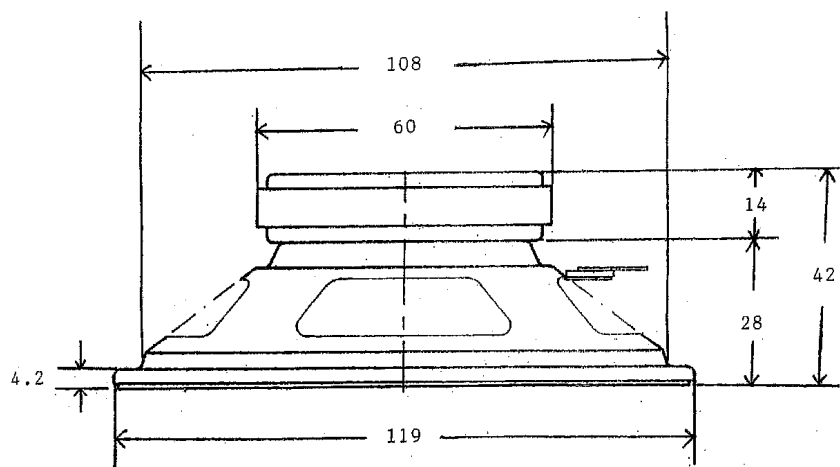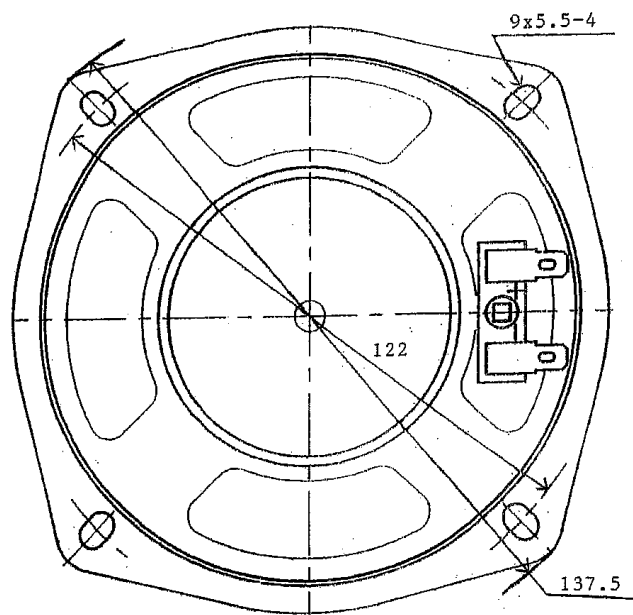

TOLERANCE: ± 0.8 MM

MODEL NO. GF1202X		
APPROVED	CHECKED	DRAWING

SHOGYO INTERNATIONAL CORP.