




SHOGYO INTERNATIONAL CORP.

www.shogyo.com

SPEAKER SPECIFICATIONS

MODEL NO.	GF1205BX (RoHS)				
1	NOMINAL SIZE	120 mm	5	inch	
2	IMPEDANCE	8 $\Omega \pm 15\%$	at. 800 Hz	1 V	
3	RESONANCE FO	120 Hz ± 24 Hz	FO Hz	1 V	
4	S.P. LEVEL	93 dB/w ± 3 dB	1 W	50 cm average at	
5	FREQ. RESPONSE	Fo Hz $\sim 13K$ Hz	500, 700, 900, 1K Hz		
6	INPUT POWER	Nominal Input 10 W	Handling Capacity 15 W		
7	OPERATION	Must be normal at program source	10 W		
8	BUZZ, RATTLE, ETC.	Must be normal at Sine Wave	6.32 V		
9	MAGNET	70 x 32 x 10 mm			
10	FLUX DENSITY	Gauss $\pm 10\%$	total flux max well within		
11	TOTAL WEIGHT	gr	oz		
12	LOAD TEST	After test meets Item 7 and 8	White noise 10 W	24 Hours	
13	DISTORTION				
14	HEAT TEST	After test meets Item 7 and 8	70 $\pm 2^\circ$ C	20-50 % R.H. 24 Hours	
15	HUMIDITY TEST	After test meet Item 7 and 8	40 $\pm 2^\circ$ C	90-95 % R.H. 24 Hours	

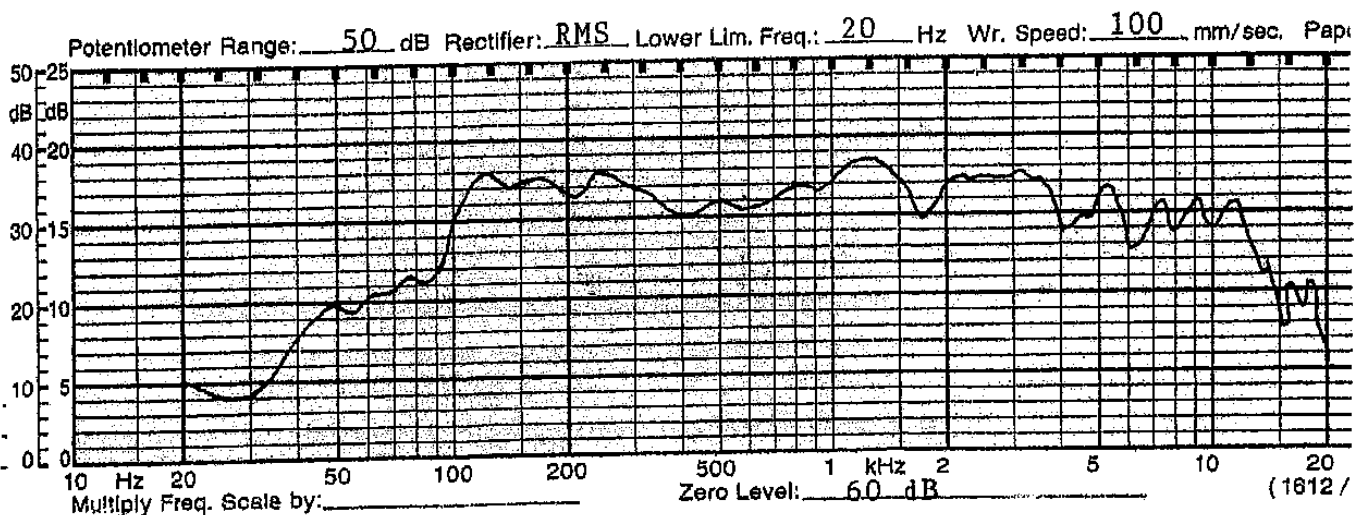

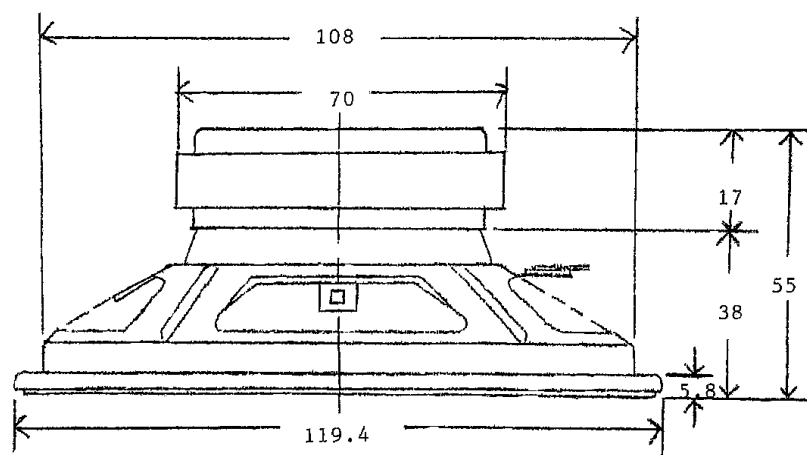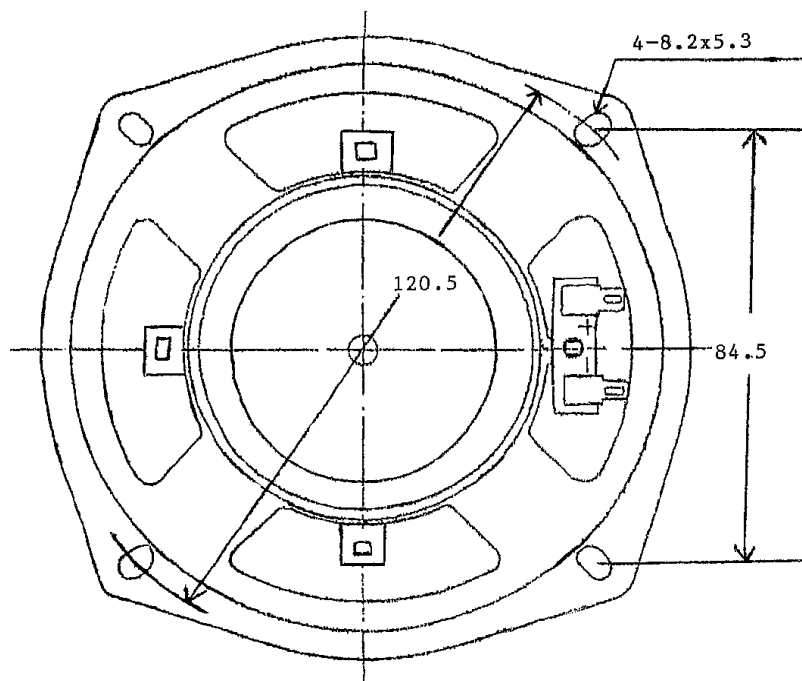

TOLERANCE: $\pm 1\text{MM}$

MODEL NO. GF1205BX		
APPROVED	CHECKED	DRAWING

SHOGYO INTERNATIONAL CORP.