




SHOGYO INTERNATIONAL CORP.

www.shogyo.com

SPEAKER SPECIFICATIONS

MODEL NO.	GF1208X (RoHS)				
1	NOMINAL SIZE	127.5 mm	5	inch	
2	IMPEDANCE	8 $\Omega \pm 15\%$	at. 0.6K Hz	1 V	
3	RESONANCE FO	90 Hz ± 14 Hz	FO Hz	1 V	
4	S.P. LEVEL	93 dB/w ± 2 dB	1 W	50 cm average at	
5	FREQ. RESPONSE	Fo Hz $\sim 10K$ Hz	MAX 10 dB	300, 400, 500, 600 Hz	
6	INPUT POWER	Nominal Input 15 W	Handling Capacity 20 W		
7	OPERATION	Must be normal at program source 15 W			
8	BUZZ, RATTLE, ETC.	Must be normal at Sine Wave 6.3 V			
9	MAGNET	80 x 40 x 15 mm			
10	FLUX DENSITY	Gauss $\pm 10\%$	total flux max well within		
11	TOTAL WEIGHT	gr	oz		
12	LOAD TEST	After test meets Item 7 and 8	White noise 15 W	48 Hours	
13	DISTORTION				
14	HEAT TEST	After test meets Item 7 and 8	70 $\pm 2^\circ$ C	20-50 % R.H. 48 Hours	
15	HUMIDITY TEST	After test meet Item 7 and 8	40 $\pm 2^\circ$ C	90-95 % R.H. 48 Hours	

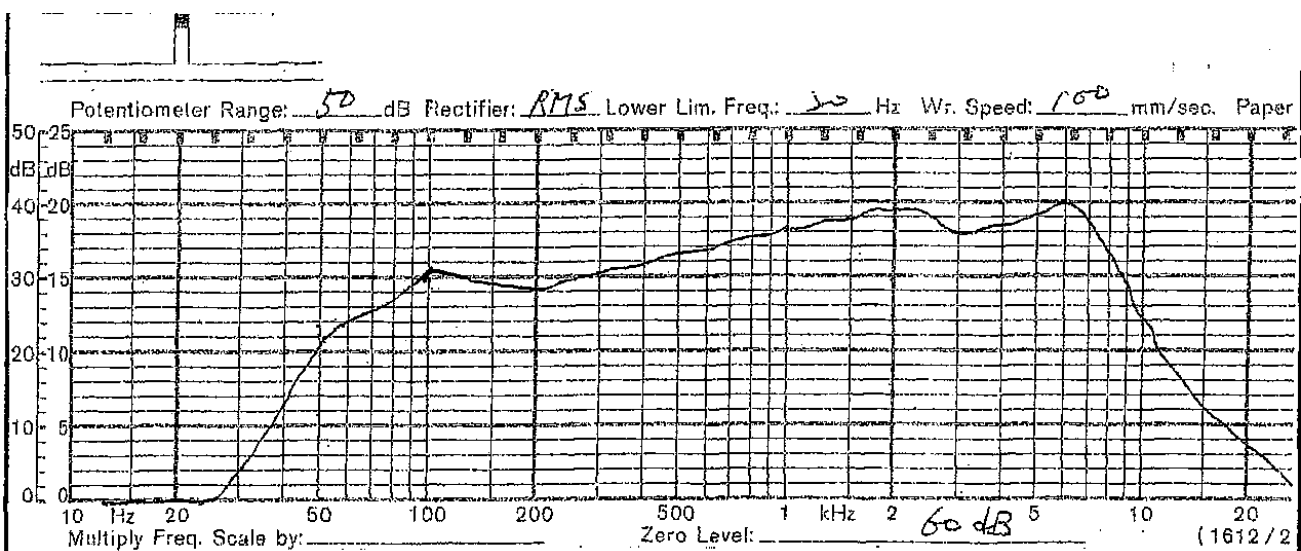

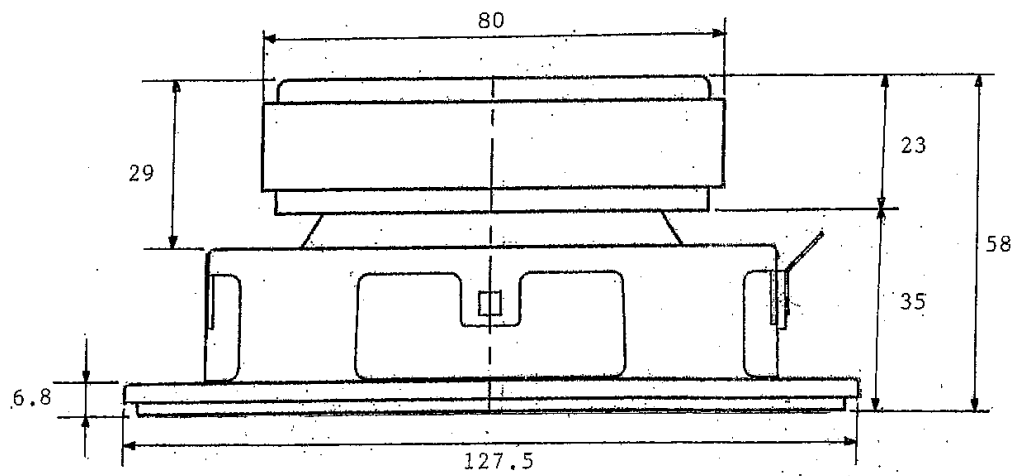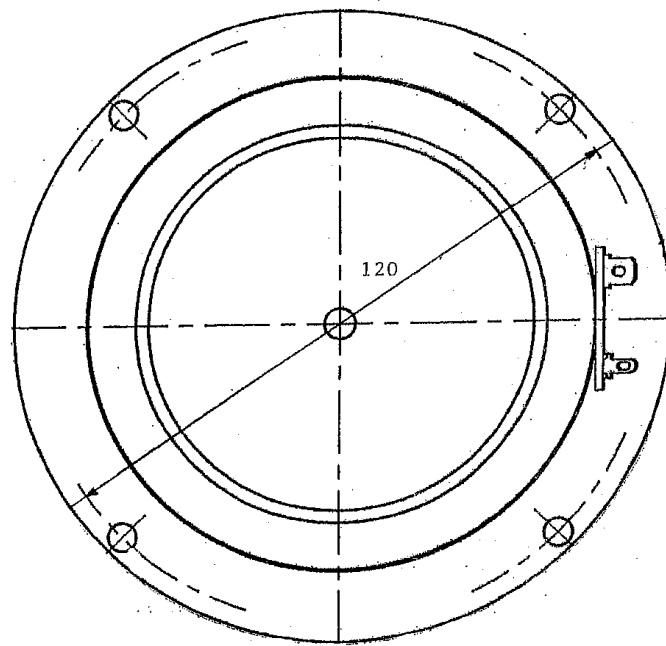

TOLERANCE: ± 0.8 MM

MODEL NO. GF1208X

APPROVED	CHECKED	DRAWING

SHOGYO INTERNATIONAL CORP.