

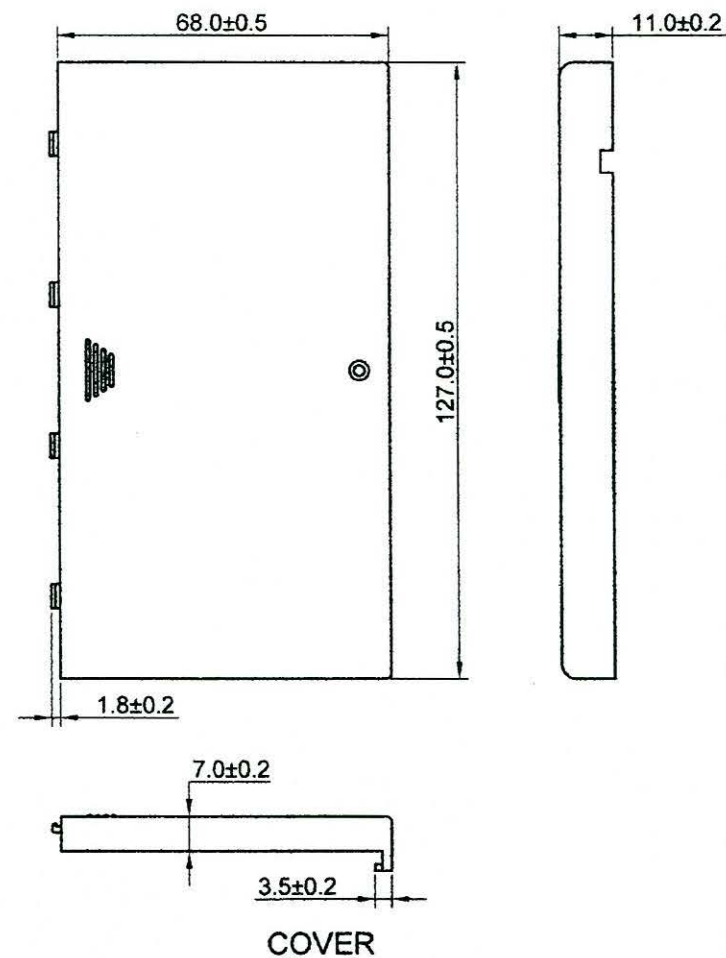


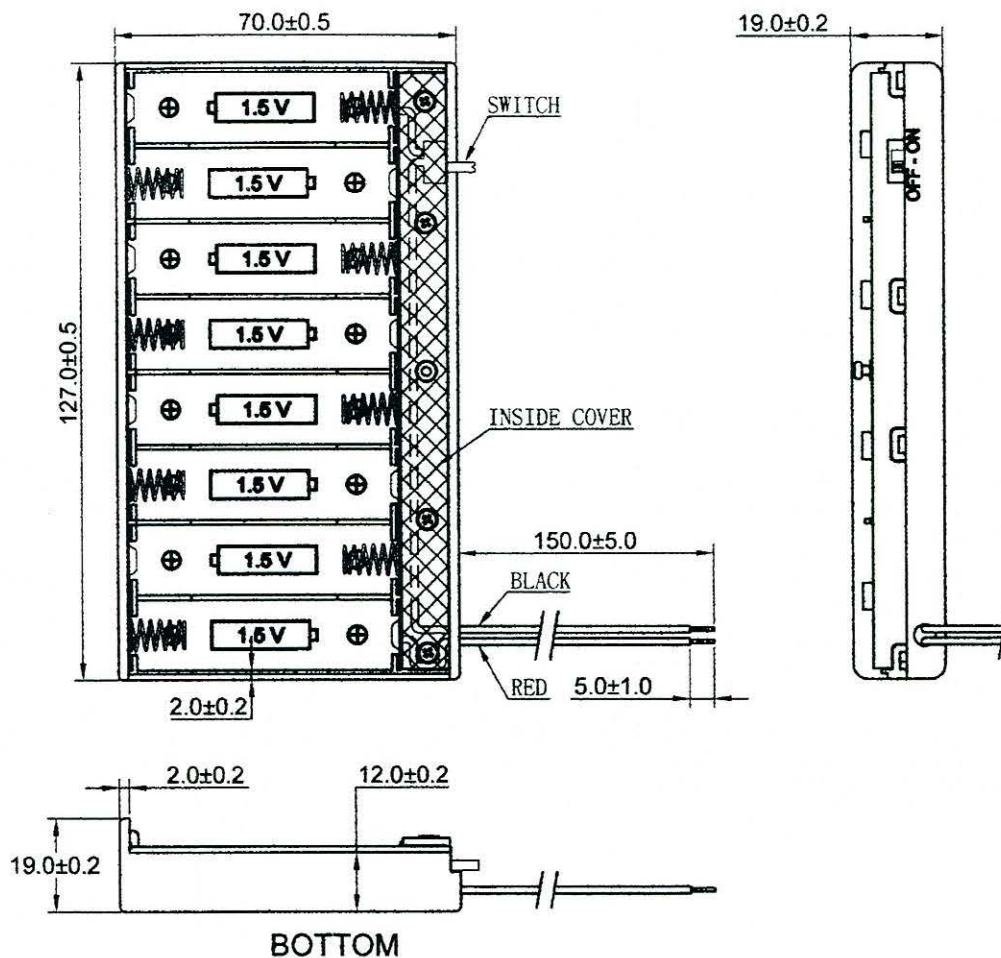

#### SPECIFICATION

- (1) ITEM NO. : SBH-381AS
- (2) WIRE: UL1007 AWG #26,  
BLACK & RED: 150MM±5MM  
STRIP & TIN: 5MM±1MM
- (3) HOLDER MATERIAL: ABS RESIN, BLACK COLOR
- (4) CONTACTS MATERIAL: 0.3MM THICK IRON NICKEL PLATED
- (5) SPRING MATERIAL: Ø 0.5MM SPRING STEEL NICKEL PLATED  
EFFECTIVE NUMBER OF TURNS 6
- (6) SWITCH: SK12D07VG6
- (7) SCREW: Ø2.3x10 PB, IRON NICKEL PLATED
- (8) RoHS COMPLIANT

| 3                  |              |                  |       |               |
|--------------------|--------------|------------------|-------|---------------|
| 2                  |              |                  |       |               |
| 1                  |              |                  |       |               |
| NO.                | MODIFICATION | DATE             | SCALE | 1:1.5         |
| General Tolerances |              |                  | UNIT  | MM            |
| 0 ~ 3              | ± 0.10       | 30 ~ 120 ± 0.30  | MAT'L | SEE SPEC.     |
| 3 ~ 6              | ± 0.10       | 120 ~ 400 ± 0.50 | DATE  | DEC. 12. 2012 |
| 6 ~ 30             | ± 0.20       | Angle: ± 3°      |       |               |



The Third Angle Projection

**SHOGYO INTERNATIONAL CORP.**

**#SBH-381AS**

**BATTERY HOLDER**