



SHOGYO INTERNATIONAL CORP.

www.shogyo.com

SPEAKER SPECIFICATIONS

MODEL NO.	GC0361HL-1X (RoHS)				
1	NOMINAL SIZE	36 mm	inch		
2	IMPEDANCE	8 $\Omega \pm 15\%$	at. 1K Hz	1 V	
3	RESONANCE FO	380 Hz ± 76 Hz	FO Hz	1 V	
4	S.P.L. LEVEL	88 dB/w ± 3 dB	1 W 50 cm average at 400, 500, 600, 800 Hz		
5	FREQ. RESPONSE	Fo Hz $\sim 20K$ Hz			
6	INPUT POWER	Nominal Input 1 W	Handling Capacity	2 W	
7	OPERATION	Must be normal at program source 1 W			
8	BUZZ, RATTLE, ETC.	Must be normal at Sine Wave 2.83 V			
9	MAGNET	NdFeB 12.5 x 3 mm			
10	FLUX DENSITY	Gauss $\pm 10\%$ total flux max well within			
11	DISTORTION				
12	LOAD TEST	After test meet Item 7 and 8	White noise	1 W 24 Hours	
13	OPERATION TEMP.				
14	HEAT TEST	After test meet Item 7 and 8	60 $\pm 2^\circ$ C	20-50 % R.H.	24 Hours
15	HUMIDITY TEST	After test meet Item 7 and 8	40 $\pm 2^\circ$ C	90-95 % R.H.	24 Hours

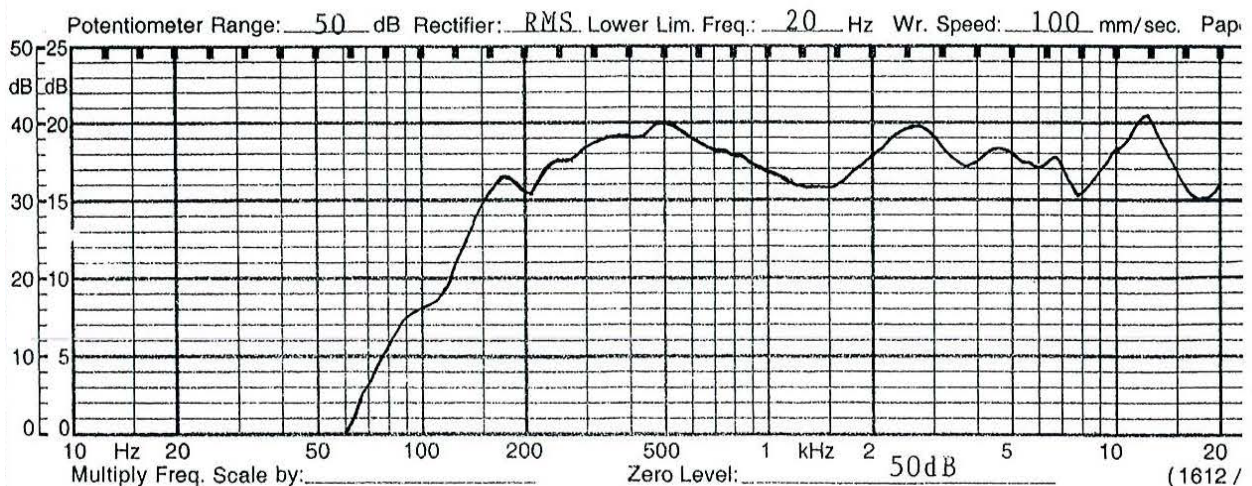

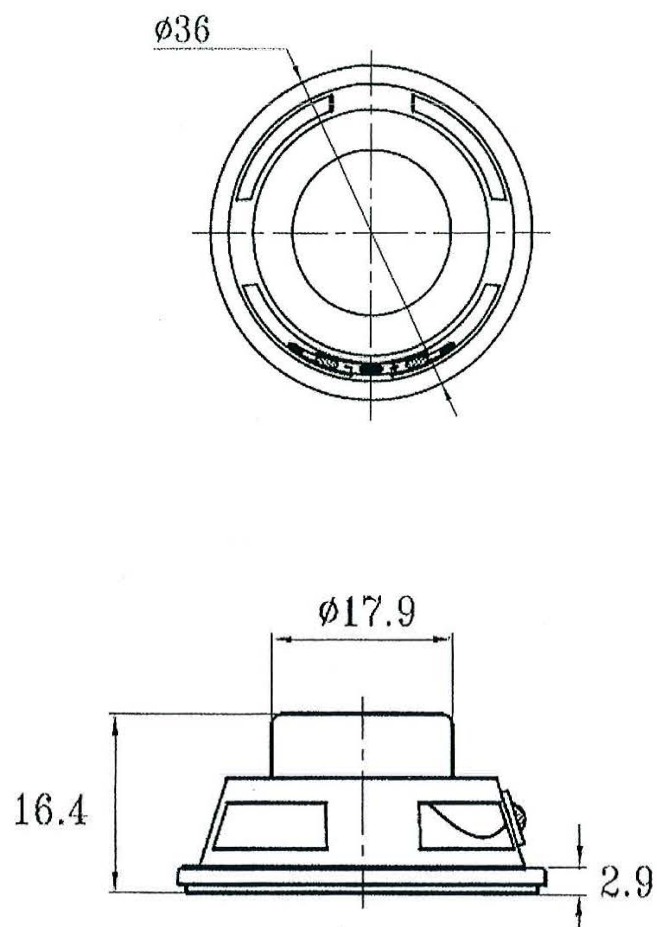

TOLERANCE: $\pm 0.3\text{MM}$

MODEL NO. GC0361HL-1X		
APPROVED	CHECKED	DRAWING