

## SPECIFICATIONS

CONTACT RATING: 5A @125 VAC or 28 VDC ( Q terminal)  
ELECTRICAL LIFE: 50,000 make-and-break cycles at full load  
CONTACT RESISTANCE: 10 mΩ max. initial @2-4 VDC, 100 mA  
INSULATION RESISTANCE: 1,000 MΩ min.  
DIELECTRIC STRENGTH: 1,500 V RMS @ sea level.  
OPERATING TEMPERATURE: -30°C to +85°C

## MATERIALS

CASE - diallyl phthalate ( DAP )  
Actuator - ABS ,black standard.  
Frame - Nylon (UL 94V-0) ,black  
BUSHING - Copper alloy or Zinc , nickel plated  
HOUSING - Stainless Steel  
CONTACT AND TERMINAL - Copper alloy, silver plated

## How do you build the switches you need!!

**The straight terminal type , please see the (A) :**

**The right angle P.C terminals, please see the (B)**

(A) 

|   |   |   |   |   |
|---|---|---|---|---|
| R | 8 | 0 | 1 | 5 |
|---|---|---|---|---|

 - 

|   |   |   |
|---|---|---|
| R | 1 | 1 |
|---|---|---|

 - 

|   |
|---|
| 2 |
|---|

 - 

|   |
|---|
| C |
|---|

|   |
|---|
| Q |
|---|

 - 

|   |
|---|
| E |
|---|

 - 

|   |   |   |
|---|---|---|
| S | 2 | 0 |
|---|---|---|

 -

| Switches Function       |    |        |      |               | Actuator | Actuator Color                                                                  | Frame Color        | Termination        | Vertical support Bracket |                    |               |
|-------------------------|----|--------|------|---------------|----------|---------------------------------------------------------------------------------|--------------------|--------------------|--------------------------|--------------------|---------------|
| R8015                   | SP | R8017  | DP   | on-none-on    | R11      | 1 white                                                                         | 1 white            | B solder lug       | (none)                   |                    |               |
| R8015A                  | SP | R8017A | DP   | on-none-(on)  | R21      | 2 black(std)                                                                    | 2 black            | C P.C 1.27width    |                          | S20                | 11.68         |
| R8016                   | SP | R8018  | DP   | on-off-on     | P13      | 3 red                                                                           | 3 red              | D Quick connect    |                          | S25                | 16.00         |
| R8016A                  | SP | R8018A | DP   | (on)-off-(on) | P23      | 4 orange                                                                        |                    | D1 wire wrap 19.05 |                          | S35                | 11.68         |
| R8016B                  | SP | R8018B | DP   | on-off-(on)   | R15      | 5 yellow                                                                        |                    | D3 wire wrap 10.8  |                          | S40                | 16.00         |
| R8301V                  | 3P | R8401V | 4P   | on-none-on    | R17      | 6 green                                                                         |                    |                    |                          | V20                | snap-in 11.68 |
| R8303V                  | 3P | R8403V | 4P   | on-none-(on)  | R19      | 7 blue                                                                          |                    |                    |                          | V25                | snap-in 16.00 |
| R8305V                  | 3P | R8405V | 4P   | on-off-on     | R12      | 9 gray                                                                          |                    |                    |                          | V35                | snap-in 11.68 |
| R8307V                  | 3P | R8407V | 4P   | (on)-off-(on) | R22      | now the available<br>is code "1/2/3/4/7/9"<br>the other please<br>inquire first |                    |                    |                          | V40                | snap-in 16.00 |
| R8309V                  | 3P | R8409V | 4P   | on-off-(on)   | R32      |                                                                                 |                    |                    |                          |                    |               |
|                         |    |        |      |               | P14      |                                                                                 |                    |                    |                          |                    |               |
|                         |    |        |      |               | P24      |                                                                                 |                    |                    |                          |                    |               |
|                         |    |        |      |               | P34      |                                                                                 |                    |                    |                          |                    |               |
| 3 way position switches |    |        |      |               |          |                                                                                 |                    | Contact Material   |                          | RoHS code          |               |
| R818                    |    |        | SP3T | on-on-on      |          |                                                                                 |                    | R silver plated    |                          | H = RoHS Compliant |               |
| R818A                   |    |        | SP3T | (on)-on-(on)  |          |                                                                                 | Q gold plated      |                    |                          |                    |               |
| R818B                   |    |        | SP3T | on-on-(on)    |          |                                                                                 | G gold over silver |                    |                          |                    |               |
| R845V                   |    |        | DP3T | on-on-on      |          |                                                                                 | K tin plated       |                    |                          |                    |               |
| R847V                   |    |        | DP3T | (on)-on-(on)  |          |                                                                                 |                    |                    |                          |                    |               |
| R849V                   |    |        | DP3T | on-on-(on)    |          |                                                                                 |                    |                    |                          |                    |               |
|                         |    |        |      |               |          |                                                                                 |                    | Epoxy seal         |                          |                    |               |
|                         |    |        |      |               |          |                                                                                 |                    | (none)             | none seal                |                    |               |
|                         |    |        |      |               |          |                                                                                 |                    | E                  | epoxy seal               |                    |               |

(B) 

|   |   |   |   |   |   |
|---|---|---|---|---|---|
| R | 8 | 0 | 1 | 5 | P |
|---|---|---|---|---|---|

 - 

|   |   |   |
|---|---|---|
| R | 1 | 1 |
|---|---|---|

 - 

|   |
|---|
| 2 |
|---|

 - 

|   |
|---|
| Q |
|---|

 - 

|   |
|---|
| E |
|---|

 - 


|   |
|---|
| S |
|---|

 - 




|  |
|--|
|  |
|--|

| Horizon Right Angle                                                                                    | Vertical Right Angle                                                                                                                                                                                                                                                                                       | Switches Function                                                                                                                                                                                                                                                                                                                                                    | Actuator                               | Actuator Color                                                                                                                                                                 | Contact Material                                                                                                                                                                                        | RoHS code          |
|--------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|
| R8015P<br>R8015PA<br>R8016P<br>R8016PA<br>R8016PB<br>R8017P<br>R8017PA<br>R8018P<br>R8018PA<br>R8018PB | R8015L / R8013L<br>R8015LA / R8013LA<br>R8016L / R8014L<br>R8016LA / R8014LA<br>R8016LB / R8014LB<br>R8017L / R8011L<br>R8017LA / R8011LA<br>R8018L / R8012L<br>R8018LA / R8012LA<br>R8018LB / R8012LB<br>R8301L<br>R8303L<br>R8305L<br>R8307L<br>R8309L<br>R8401L<br>R8403L<br>R8405L<br>R8407L<br>R8409L | SP on-none-on<br>SP on-none-(on)<br>SP on-off-on<br>SP (on)-off-(on)<br>SP on-off-(on)<br>DP on-none-on<br>DP on-none-(on)<br>DP on-off-on<br>DP (on)-off-(on)<br>DP on-off-(on)<br>3P on-none-on<br>3P on-none-(on)<br>3P on-off-on<br>3P (on)-off-(on)<br>3P on-off-(on)<br>4P on-none-on<br>4P on-none-(on)<br>4P on-off-on<br>4P (on)-off-(on)<br>4P on-off-(on) | R11<br>R21<br>R17<br>R19<br>P13<br>P23 | 1 white<br>2 black(std)<br>3 red<br>4 orange<br>5 yellow<br>6 green<br>7 blue<br>9 gray<br><br>now the available<br>is code "1/2/3/4/7/9"<br>the other please<br>inquire first | Q silver plated<br>R gold plated<br>G gold over silver<br>K tin plated<br><br><b>Epoxy seal</b><br>(none) none seal<br>E epoxy seal<br><br><b>Support Bracket type</b><br>(none) std.<br>S snap-in type | H = RoHS Compliant |
| <b>3 way position switches</b>                                                                         |                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                      |                                        |                                                                                                                                                                                |                                                                                                                                                                                                         |                    |
| R818P/R818L/ R812L<br>R818PA/R818LA/R812LA<br>R818PB/R818LB/R812LB<br>R845L<br>R847L<br>R849L          |                                                                                                                                                                                                                                                                                                            | SP3T on-on-on<br>SP3T (on)-on-(on)<br>SP3T on-on-(on)<br>DP3T on-on-on<br>DP3T (on)-on-(on)<br>DP3T on-on-(on)                                                                                                                                                                                                                                                       |                                        |                                                                                                                                                                                |                                                                                                                                                                                                         |                    |

## SPDT



| Model No.   | Switching position |      |      |
|-------------|--------------------|------|------|
|             |                    |      |      |
| R8015       | ON                 | none | ON   |
| R8015A      | ON                 | none | (ON) |
| R8016       | ON                 | OFF  | ON   |
| R8016A      | (ON)               | OFF  | (ON) |
| R8016B      | ON                 | OFF  | (ON) |
| Term. Comm. | 2-3                | open | 2-1  |

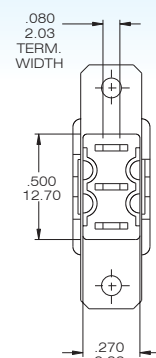
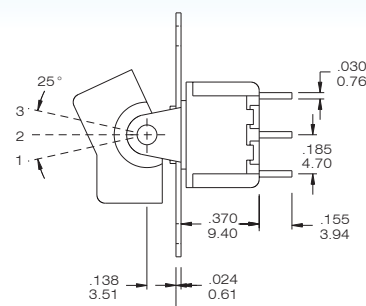
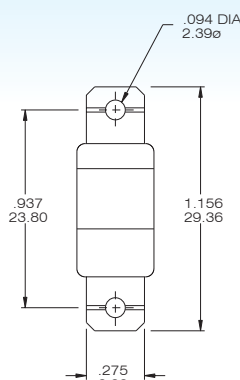


R8015 - R11-2-BQ

## DPDT




| Model No.             | Switching position |         |         |
|-----------------------|--------------------|---------|---------|
|                       |                    |         |         |
| R8017                 | ON                 | none    | ON      |
| R8017A                | ON                 | none    | (ON)    |
| R8018                 | ON                 | OFF     | ON      |
| R8018A                | (ON)               | OFF     | (ON)    |
| R8018B                | ON                 | OFF     | (ON)    |
| Term. Comm.           | 2-3,5-6            | open    | 2-1,5-4 |
| 3 way switches (SP3T) |                    |         |         |
| R818                  | ON                 | ON      | ON      |
| R818A                 | (ON)               | ON      | (ON)    |
| R818B                 | ON                 | ON      | (ON)    |
| Term. Comm.           | 2-3,5-6            | 2-3,5-4 | 2-1,5-4 |

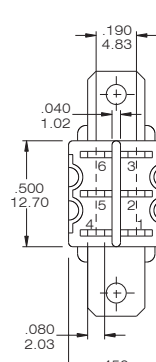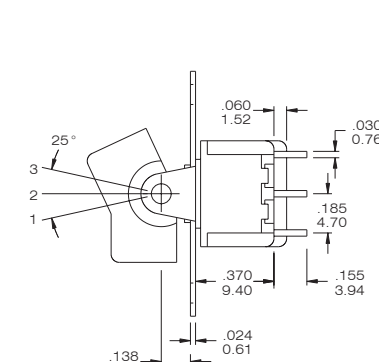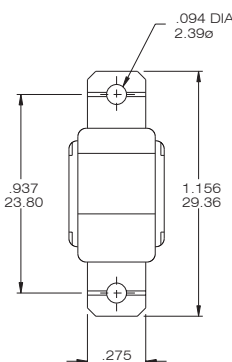




R8017 - R11-2-BQ

Please see page B14 to know more about R818 ( 3-way Switches)

## 3PDT



| Model No.   | Switching position |      |                |
|-------------|--------------------|------|----------------|
|             |                    |      |                |
| R8301V      | ON                 | none | ON             |
| R8303V      | ON                 | none | (ON)           |
| R8305V      | ON                 | OFF  | ON             |
| R8307V      | (ON)               | OFF  | (ON)           |
| R8309V      | ON                 | OFF  | (ON)           |
| Term. Comm. | 2-3,5-6<br>8-9     | open | 2-1,5-4<br>8-7 |


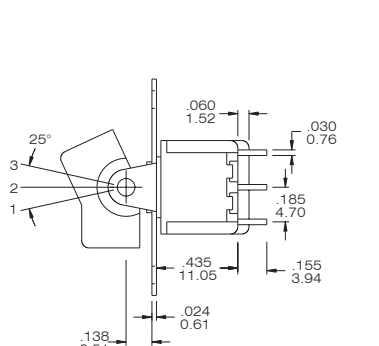



R8301V- R11-2-BQ

## 4PDT



| Model No.             | Switching position   |                      |                      |
|-----------------------|----------------------|----------------------|----------------------|
|                       |                      |                      |                      |
| R8401V                | ON                   | none                 | ON                   |
| R8403V                | ON                   | none                 | (ON)                 |
| R8405V                | ON                   | OFF                  | ON                   |
| R8407V                | (ON)                 | OFF                  | (ON)                 |
| R8409V                | ON                   | OFF                  | (ON)                 |
| Term. Comm.           | 2-3,5-6<br>8-9,11-12 | open                 | 2-1,5-4<br>8-7,11-10 |
| 3 way switches (DP3T) |                      |                      |                      |
| R845V                 | ON                   | ON                   | ON                   |
| R847V                 | (ON)                 | ON                   | (ON)                 |
| R849V                 | ON                   | ON                   | (ON)                 |
| Term. Comm.           | 2-3,5-6<br>8-9,11-12 | 2-3,5-4<br>8-9,11-10 | 2-1,5-4<br>8-7,11-10 |

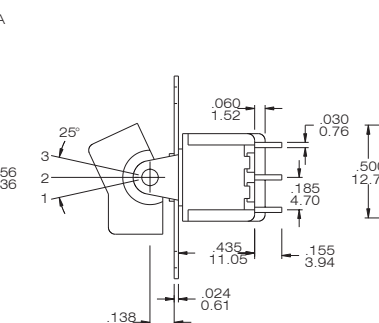


R8401V -R11-2-BQ


Please see page B14 to know more about R845V ( 3-way Switches)

## HORISON RIGHT ANGLE

### SPDT



| Model No.   | Switching position |      |      |
|-------------|--------------------|------|------|
|             |                    |      |      |
| R8015P      | ON                 | none | ON   |
| R8015PA     | ON                 | none | (ON) |
| R8016P      | ON                 | OFF  | ON   |
| R8016PA     | (ON)               | OFF  | (ON) |
| R8016PB     | ON                 | OFF  | (ON) |
| Term. Comm. | 2-3                | open | 2-1  |

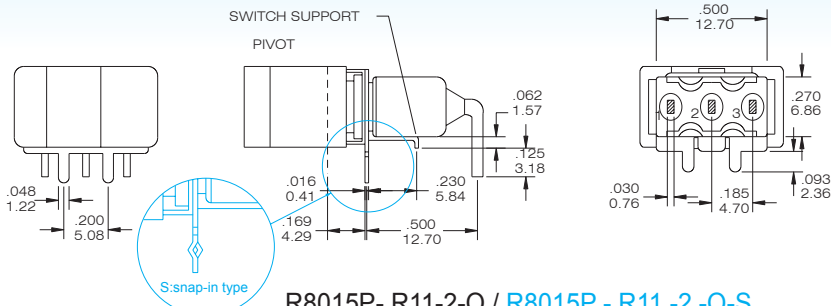


R8015P - R11-2-Q / R8015P - R11-2-Q-S

### DPDT



| Model No.             | Switching position |         |         |
|-----------------------|--------------------|---------|---------|
|                       |                    |         |         |
| R8017P                | ON                 | none    | ON      |
| R8017PA               | ON                 | none    | (ON)    |
| R8018P                | ON                 | OFF     | ON      |
| R8018PA               | (ON)               | OFF     | (ON)    |
| R8018PB               | ON                 | OFF     | (ON)    |
| Term. Comm.           | 2-3,5-6            | open    | 2-1,5-4 |
| 3 way switches (SP3T) |                    |         |         |
| R818P                 | ON                 | ON      | ON      |
| R818PA                | (ON)               | ON      | (ON)    |
| R818PB                | ON                 | ON      | (ON)    |
| Term. Comm.           | 2-3,5-6            | 2-3,5-4 | 2-1,5-4 |

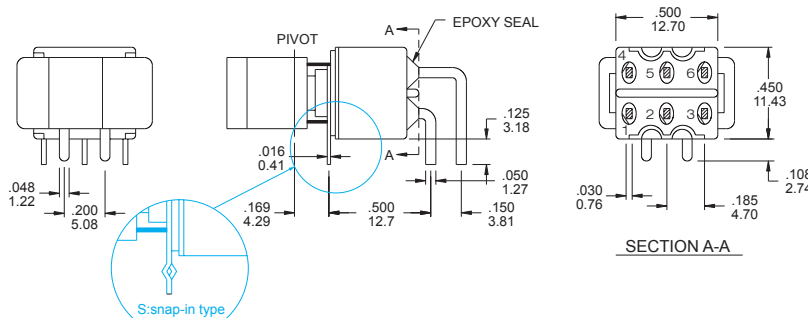

R8017P - R11-2-Q / R8017P - R11-2-Q-S


Please see page B14 to know more about R818P ( 3-way Switches)

## VERTICAL RIGHT ANGLE

### SPDT




| Model No.   | Switching position |      |      |
|-------------|--------------------|------|------|
|             |                    |      |      |
| R8015L      | ON                 | none | ON   |
| R8015LA     | ON                 | none | (ON) |
| R8016L      | ON                 | OFF  | ON   |
| R8016LA     | (ON)               | OFF  | (ON) |
| R8016LB     | ON                 | OFF  | (ON) |
| Term. Comm. | 2-3                | open | 2-1  |

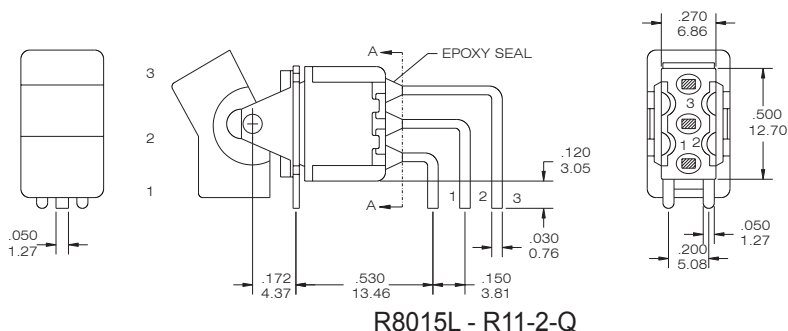


R8015L - R11-2-Q

### SPDT



| Model No.   | Switching position |      |      |
|-------------|--------------------|------|------|
|             |                    |      |      |
| R8013L      | ON                 | none | ON   |
| R8013LA     | ON                 | none | (ON) |
| R8014L      | ON                 | OFF  | ON   |
| R8014LA     | (ON)               | OFF  | (ON) |
| R8014LB     | ON                 | OFF  | (ON) |
| Term. Comm. | 2-3                | open | 2-1  |

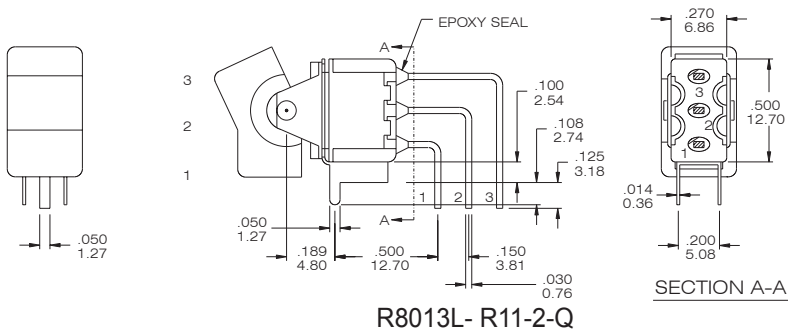


R8013L - R11-2-Q

### DPDT



| Model No.             | Switching position |         |         |
|-----------------------|--------------------|---------|---------|
|                       |                    |         |         |
| R8017L                | ON                 | none    | ON      |
| R8017LA               | ON                 | none    | (ON)    |
| R8018L                | ON                 | OFF     | ON      |
| R8018LA               | (ON)               | OFF     | (ON)    |
| R8018LB               | ON                 | OFF     | (ON)    |
| Term. Comm.           | 2-3,5-6            | open    | 2-1,5-4 |
| 3 way switches (SP3T) |                    |         |         |
| R818L                 | ON                 | ON      | ON      |
| R818LA                | (ON)               | ON      | (ON)    |
| R818LB                | ON                 | ON      | (ON)    |
| Term. Comm.           | 2-3,5-6            | 2-3,5-4 | 2-1,5-4 |

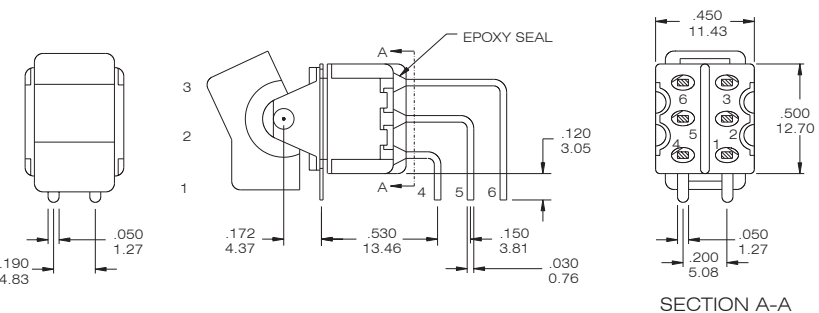

R8017L - R11-2-Q



Please see page B14 to know more about R818L (3-way Switches)

## VERTICAL RIGHT ANGLE PAGE

## DPDT




| Model No.             | Switching position |         |         |
|-----------------------|--------------------|---------|---------|
|                       |                    |         |         |
| R8011L                | ON                 | none    | ON      |
| R8011LA               | ON                 | none    | (ON)    |
| R8012L                | ON                 | OFF     | ON      |
| R8012LA               | (ON)               | OFF     | (ON)    |
| R8012LB               | ON                 | OFF     | (ON)    |
| Term. Comm.           | 2-3,5-6            | open    | 2-1,5-4 |
| 3 way switches (SP3T) |                    |         |         |
| R812L                 | ON                 | ON      | ON      |
| R812LA                | (ON)               | ON      | (ON)    |
| R812LB                | ON                 | ON      | (ON)    |
| Term. Comm.           | 2-3,5-6            | 2-3,5-4 | 2-1,5-4 |

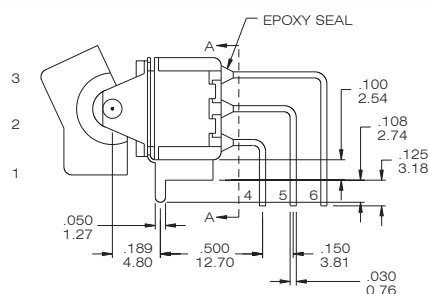



R8011L - R11-2-Q

Please see page B14 to know more about R812L ( 3-way Switches)

## 3PDT




| Model No.   | Switching position |      |         |
|-------------|--------------------|------|---------|
|             |                    |      |         |
| R8301L      | ON                 | none | ON      |
| R8303L      | ON                 | none | (ON)    |
| R8305L      | ON                 | OFF  | ON      |
| R8307L      | (ON)               | OFF  | (ON)    |
| R8309L      | ON                 | OFF  | (ON)    |
| Term. Comm. | 2-3,5-6            | open | 2-1,5-4 |
|             | 8-9                |      | 8-7     |

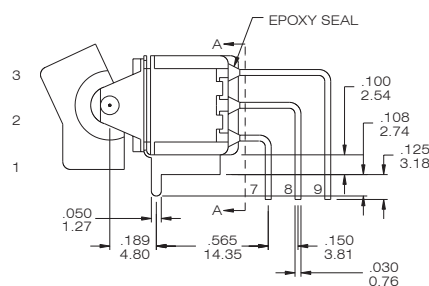



R8301L- R11-2-Q

## 4PDT



| Model No.             | Switching position |           |           |
|-----------------------|--------------------|-----------|-----------|
|                       |                    |           |           |
| R8401L                | ON                 | none      | ON        |
| R8403L                | ON                 | none      | (ON)      |
| R8405L                | ON                 | OFF       | ON        |
| R8407L                | (ON)               | OFF       | (ON)      |
| R8409L                | ON                 | OFF       | (ON)      |
| Term. Comm.           | 2-3,5-6            | open      | 2-1,5-4   |
|                       | 8-9,11-12          |           | 8-7,11-10 |
| 3 way switches (DP3T) |                    |           |           |
| R845L                 | ON                 | ON        | ON        |
| R847L                 | (ON)               | ON        | (ON)      |
| R849L                 | ON                 | ON        | (ON)      |
| Term. Comm.           | 2-3,5-6            | 2-3,5-4   | 2-1,5-4   |
|                       | 8-9,11-12          | 8-9,11-10 | 8-7,11-10 |

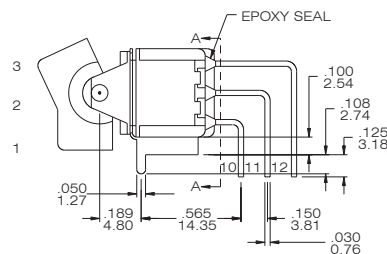

R8401L - R11-2-Q





Please see page B14 to know more about R845L( 3-way Switches)

FOR R8015P-R8016P

FOR R8017P-R8018P

FOR R8015L-R8016L

FOR R8013L-R8014L







FOR R8017L-R8018L

FOR R8011L-R8012L



FOR R8301L-R8309L

FOR R8401L-R8409L




## Actuator Option(PANEL REAR MOUNT) only for the straight type (Page B-08)



R11

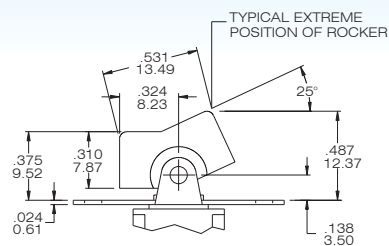


PANELMOUNTING





R21

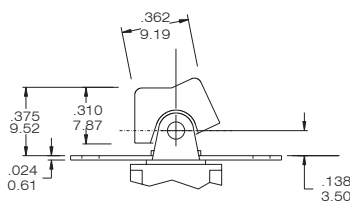


PANELMOUNTING





P13




PANELMOUNTING





P23




PANELMOUNTING





R15




PANELMOUNTING

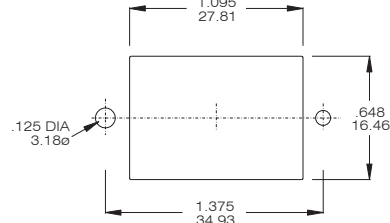




R17

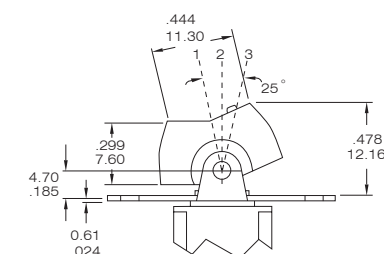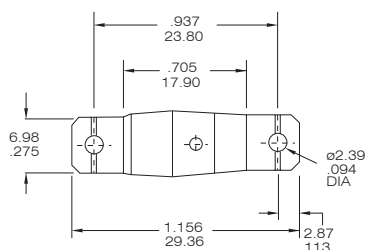

PANELMOUNTING





R19

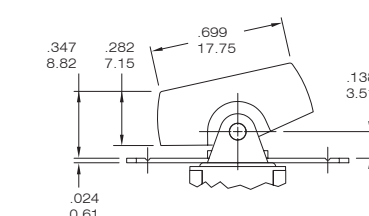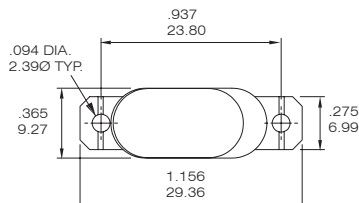




## Actuator Option(SNAP-IN FRONT MOUNT) only for the straight type (Page B-08)



R12

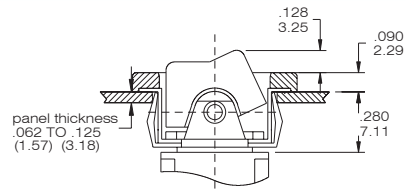


PANEL MOUNTING





R22

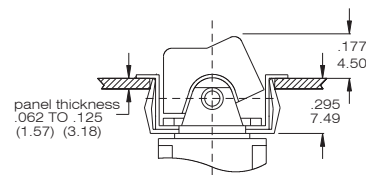


PANEL MOUNTING





R32

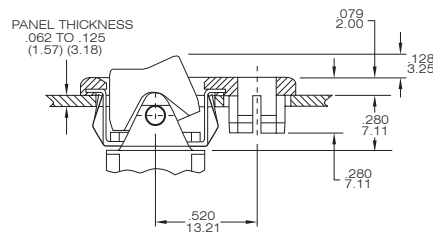


PANEL MOUNTING

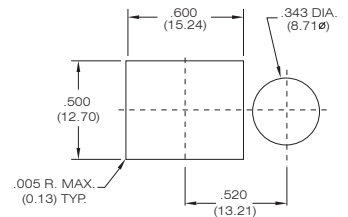



P14

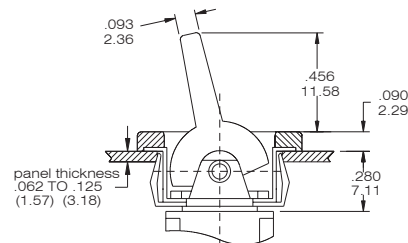


PANEL MOUNTING






P24

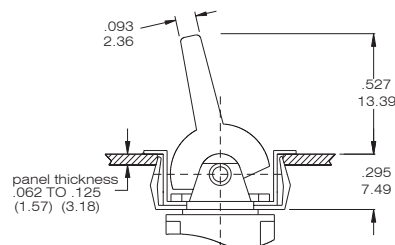


PANEL MOUNTING



P34

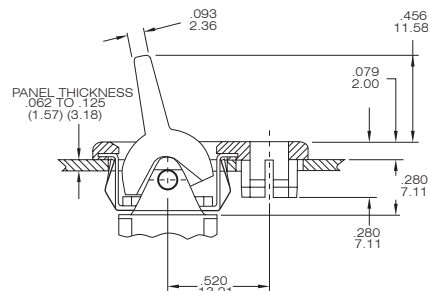


PANEL MOUNTING




## Actuator Option (P.C.B MOUNT)


R11




R21




P13




P23





R15

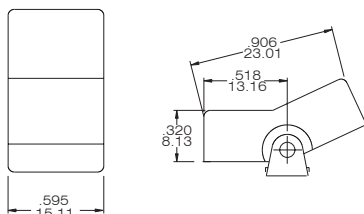

R17



R19



## Actuator Color Option


## ACTUATOR AND FRAME COLORS

|   |             |   |        |   |      |
|---|-------------|---|--------|---|------|
| 1 | White       | 4 | Orange | 7 | Blue |
| 2 | Black(Std.) | 5 | Yellow | 9 | Gray |
| 3 | Red         | 6 | Green  |   |      |

## TERMINAL OPTION (ONLY FOR THE STRAIGHT TYPE R8015~R8401)


## TERMINAL SEAL OPTION

B SOLDER LUG




THK 0.76 (.030)

C PRINTED CIRCUIT




THK 0.76 (.030)

D QUICK CONNECT



THK 0.76 (.030)


WIREWRAP



THK 0.76 (.030)

| CODE | "A" dimension |
|------|---------------|
| D1   | .750 (19.05)  |
| D3   | .425 (10.8)   |

E TERMINAL SEAL



EPOXY SEAL

## CONTACT MATERIAL OPTIONS

| CODE | CONTACT MATERIAL               | TERMINAL MATERIAL              | RATING                                                                    |
|------|--------------------------------|--------------------------------|---------------------------------------------------------------------------|
| Q    | Silver plated                  | Silver plated                  | 5 A @ 125 V AC or 28 V DC; 3 A @ 250 VAC                                  |
| R    | Gold plated over nickel plated | Gold plated over nickel plated | 0.4VA MAX @ 20 V AC or DC MAX                                             |
| G    | Gold plated over silver plated | Gold plated over silver plated | 0.4 VA MAX @ 20 V AC or DC MAX or 5 A @ 125V AC or 28 V DC; 3 A @ 250 VAC |
| K    | Gold plated over nickel plated | Tin over nickel plated         | 0.4VA MAX @ 20 V AC or DC MAX                                             |

\* THE K option is only for some special item. Please inquire first when you need the "K" option


## VERTICAL SUPPORT BRACKET OPTION

( only apply the straight type terminal -page B08. Please build the terminal option is "c" code)



S20 / S25/ V20/V25



SPDT




P.C. MOUNTING



SNAP-IN  
V20/ V25

R8015-R11-2-CQ-S20(S25)

DPDT




P.C. MOUNTING


SNAP-IN  
V20/ V25

R8017 - R11-2-CQ-S20(S25)



S35/S40 /V35/V40



SPDT




P.C. MOUNTING



SNAP-IN  
V35/ V40

R8015-R11-2-CQ-S35(S40)

DPDT



P.C. MOUNTING

SNAP-IN  
V35/ V40


R8017-R11-2-CQ-S35(S40)

| option Code                | A dimension   |
|----------------------------|---------------|
| S35/V35                    | .460<br>11.68 |
| S40/V40                    | .630<br>16.00 |
| V35/V40 : the snap-in type |               |

## The information of 3-way rocker switches

POS.3  
POS.2  
POS.1


SINGLE POLE, 3 POSITION

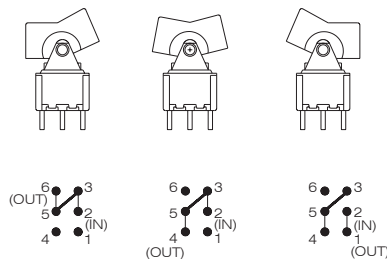

SP3T

POS.3  
POS.2  
POS.1

DOUBLE POLE, 3 POSITION



DP3T