

## SPECIFICATIONS SHEET

**PRODUCT TYPE : MAGNETIC BUZZER**

**PRODUCT SERIES : SMDB**

**DESCRIPTION : MT BUZZER SINGLE 5VDC SMD LCP RoHS**

**COLOR : BLACK**

**ELECTRICAL SPECIFICATIONS**

<b>MODEL NO.</b>		<b>SMDB05LFMP</b>
<b>OPERATING VOLTAGE RANGE</b>	( VDC )	3.0 ~ 6.5
<b>RATED VOLTAGE</b>	( VDC )	5.0
* <b>MAX. RATED CURRENT</b>	( mA )	30.0
* <b>MIN. SOUND OUTPUT</b>	( dBA/ 10.0 cm )	80.0
* <b>FREQUENCY</b>	( Hz )	2700.0 ± 300.0
<b>TONE NATURE</b>		SINGLE
<b>OPERATING TEMPERATURE</b>	( °C )	- 40.0 ~ + 85.0
<b>STORAGE TEMPERATURE</b>	( °C )	- 40.0 ~ + 90.0
<b>TERMINAL</b>		SMD
<b>HOUSING MATERIAL</b>		LCP
<b>WEIGHT</b>	( g )	1.0

\* Value applying at rated voltage


**DIMENSIONS**

UNIT : mm

**BOTTOM VIEW**

**SIDE VIEW**

**TOP VIEW**

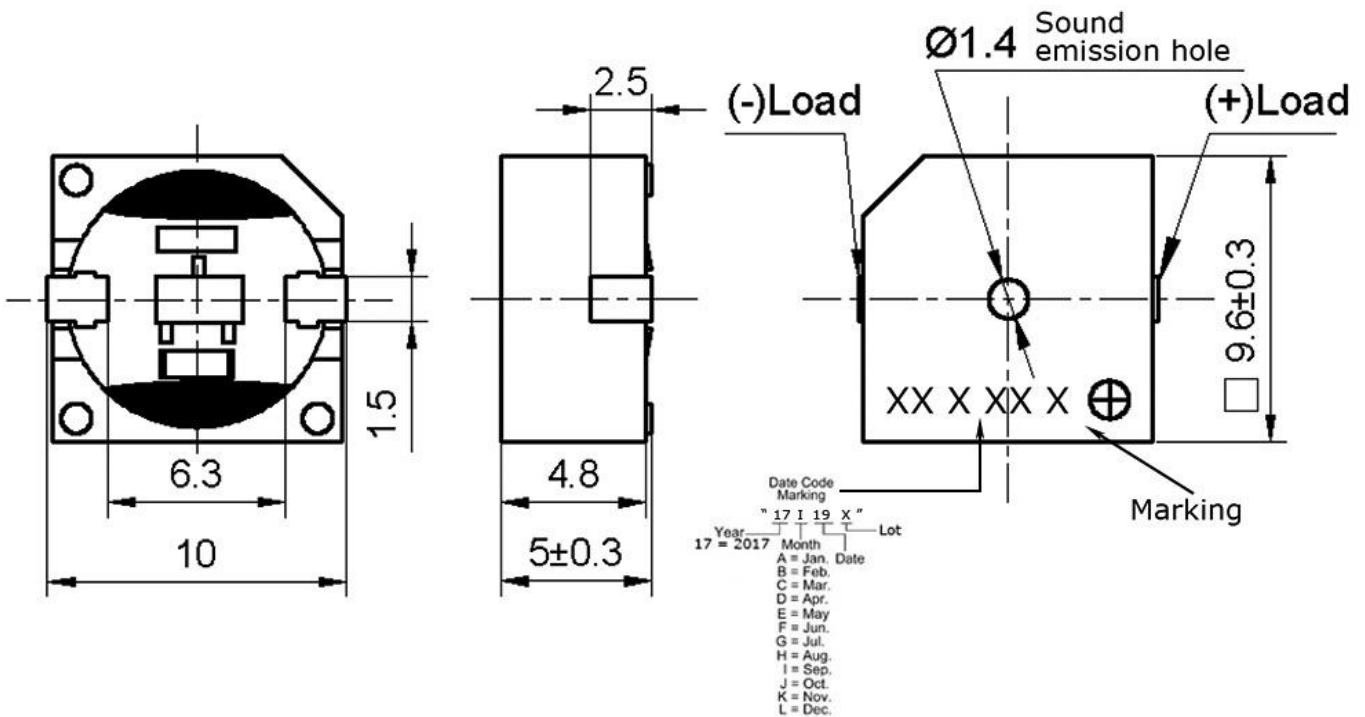

Approved By :  
Date : 20 Sep 2017

Prepared By :  
Date : 20 Sep 2017

Modify :	Date :	By :
Change drawing	13-May-14	Wai
Frequency 2700 ± 300	13-May-14	Wai
1 ) Operating Voltage : 4 ~ 7 VDC change to 3 ~ 6.5 VDC. 2 ) Operating Temp. : -30 ~ +70 °C change to -40 ~ +85 °C. 3 ) Storage Temp. : -40 ~ +85 °C change to -40 ~ +90 °C. 4 ) Printing color black change to yellow. 5 ) Modify Mechanical Draw.	20-Sep-17	Nelson